2025 EDITION

SIMPLY DIFFERENT



#LegrandImprovingLives

legrand®

ARTEOR™ ADVANCE
Made for your success

DESIGN AWARD 2025



VISIONARY – INNOVATIVE – COMMITTED

CONTENTS

4-5 INTRODUCTION	ARTEOR™ ADVANCE FOR PREMIUM PROJECTS WITH CHARACTER
6-11 THE STORY	VISIONARY, INNOVATIVE, COMMITTED
12-19 DESIGN	DESIGN LANGUAGE
20-37 FINISHES	COLLECTIONS
38-39 INSTALLATION	MODULARITY, HYBRID PLATES, SAFETY
40-41 ECO DESIGN & CIRCULARITY	DESIGN FIT FOR THE FUTURE
42-67 SMART HOME	INTRODUCTION ARTEOR™ ADVANCE WITH NETATMO & ARTEOR™ ADVANCE MYHOME SUPPORTING INTEROPERABILITY HOME + CONTROL APP WIRELESS BATTERYLESS CONTROLS
68-69 LIVING SPACES	LIVE AS YOU WANT
70-71 WORK SPACES	WORKING WITH ARTEOR™ ADVANCE
72-77 HOTEL SOLUTIONS	STAND-ALONE SOLUTIONS SMART HOTEL SOLUTIONS
78-81	ARTEOR™ ADVANCE KNX
82-186	CATALOGUE PAGES



ARTEOR™ ADVANCE
For premium projects with character

Arteor Advance is about turning a successful classic into something even better. The starting point for this redesign are the features of the Arteor range that specifiers, engineers and contractors alike have appreciated for years: easy and safe installation, the endless possibilities offered by the modularity of the range, and its versatility which makes it suitable for projects of all types, all over the world.

Arteor Advance makes it even easier to deliver premium projects. With its completely new design, connected, smart and sustainable, the range will help you express your very own personal style.





VISIONARY.
Design as expression of a lifestyle

The design of Arteor Advance is a response to current technological developments and social evolutions. At a time of expanding urbanization, where work can be performed anywhere, and with the boundaries between the virtual and real worlds becoming increasingly blurred, there is a growing demand for intuitive technology with a human feel.



Design trend: combining minimalism with opulence

The ubiquitous touchscreen awakens the need for real experience, involving the senses of touch, hearing, and sight. That's why contemporary interior design today is often inspired by 'visual richness', with intense colours, striking patterns, lots of plants and statement furniture. This is then teamed with minimalistic details, limited to basic shapes and understated colours and forms. These can either be integrated with harmony in mind or deliberately used to create a distinct contrast.



INNOVATIVE.
Smart & Connected

Connectivity and smart functions are part and parcel of everyday life these days. They are indispensable both at home and at work, and when we are on the move. As part of Legrand's smart ecosystem, Arteor Advance offers not only familiar solutions for comfort and safety, but also many energy-saving and sustainability options.



The smart technology comes with a real premium look, integrates seamlessly into users' everyday environments, and improves quality of life everywhere. Not least because it is easy and intuitive to use and can be adapted to individual preferences and needs.



COMMITTED.
Design is about more than looks




Arteor Advance concentrates on the essentials, but its design approach is about more than just looks or styling. The avoidance of unnecessary details is also driven by Legrand's commitment to promote sustainability. The development was guided by the principle of 'reduce, reuse, recycle', which takes in every aspect of the life cycle, from product design via production and use through to recycling.

Various measures are aimed at optimising the carbon footprint of the new range. These improvements in the environmental properties are reviewed on a regular basis using methods that are based on the principles of the life cycle analysis.

Arteor Advance is a good example of how Legrand puts its sustainability objectives into practice. At the same time, it supports you in achieving your own targets, as Arteor Advance helps you comply with even the most demanding environmental standards.

Two forms, one design concept

Square

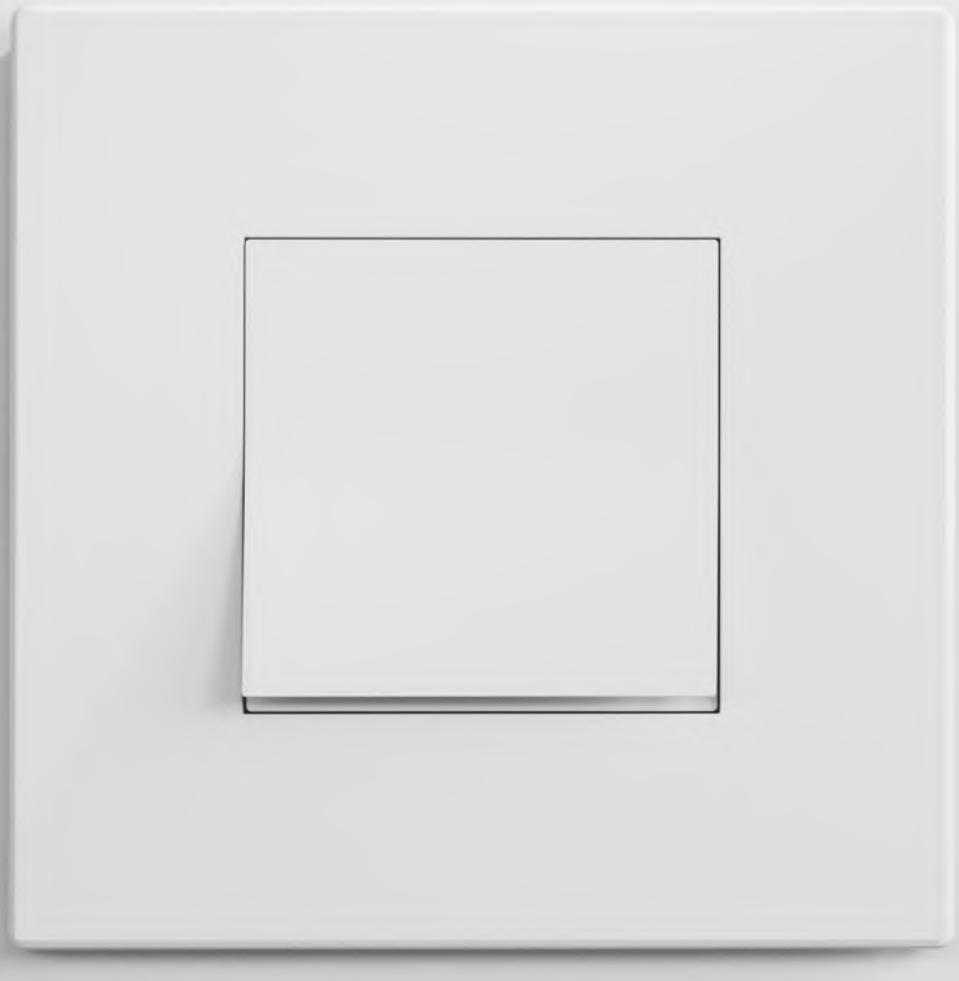

Design language

Arteor Advance is available in two design lines, with clearly different rocker formats. The Square design gives a whole new dimension to a classic form. The Slender rocker is a completely new design embodying the trends of the future.

DESIGN AWARD 2025

Slender



Floating rocker

The impression created by the floating rocker is the same for both types: Light and elegant, it seems to float above the plate. Both forms can be combined to great effect as well. The Slender version allows to make a clear statement, while the Square version is more subtle and discreet.


Taking Arteor™ to the next level

Arteor Advance's spectacular design language, the pared-down selection of materials, and the elegant, neutral colour palette all favour design solutions that aspire to deliver outstanding looks and functionality.

Arteor Advance has all the advantages of a modular system that is compatible with all the main installation standards. For your premium projects, all around the world.






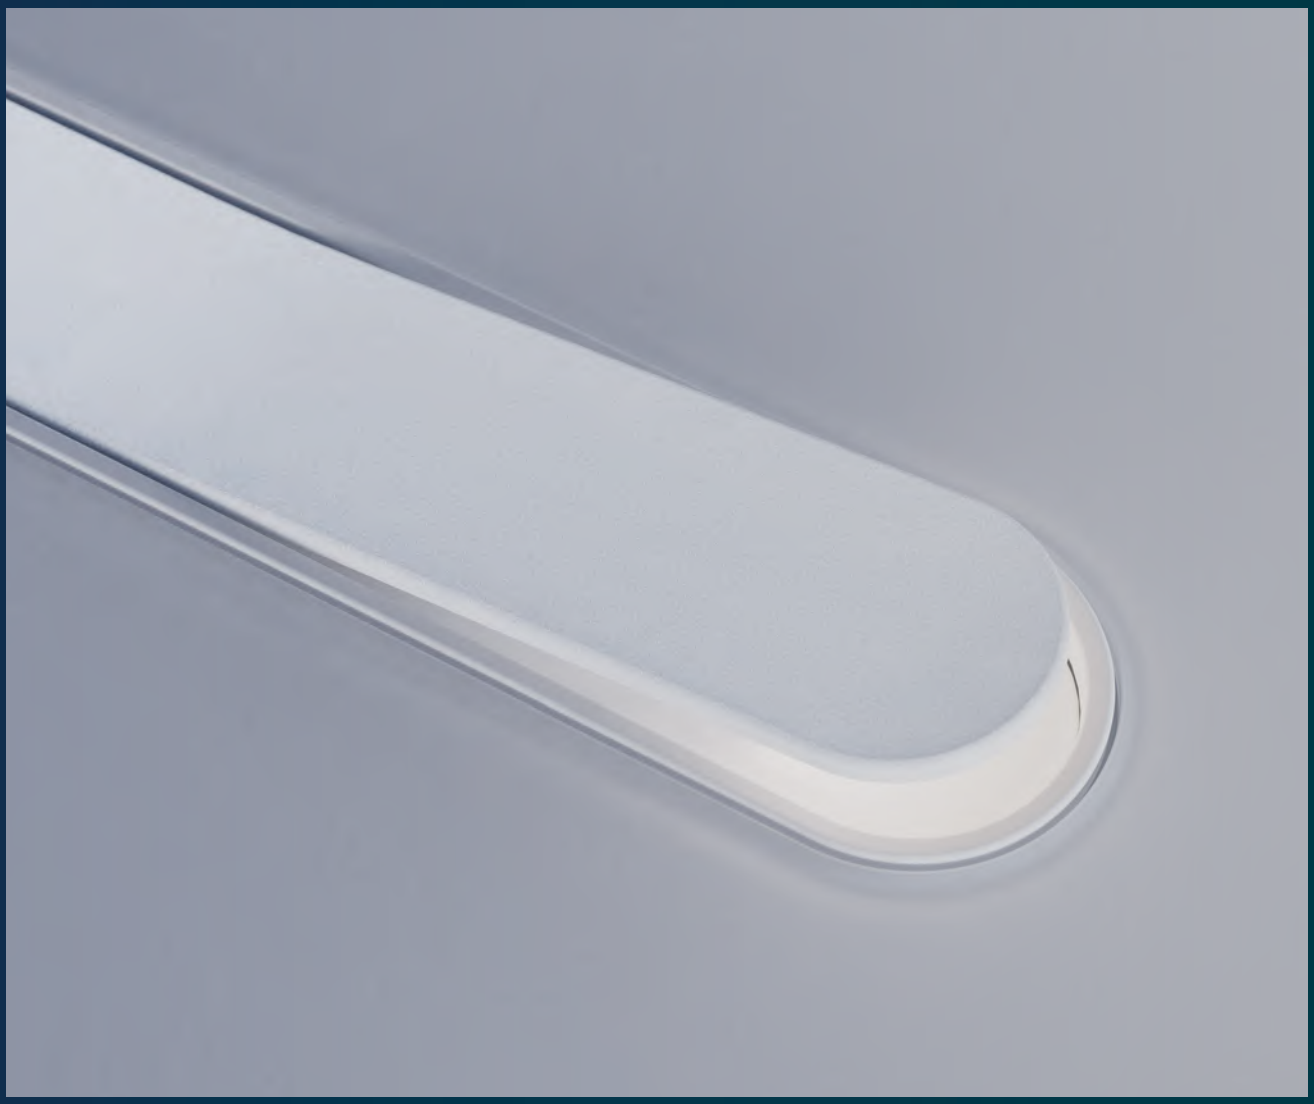


The iconic Slender rocker. Slim, aerial and distinctive. Perfect low angle curvature and light signature with a soft glow. Backlit with LEDs, which both underlines its technical feel and improves its functionality. Its location is immediately detectable in the dark.

Visionary and minimalistic

The visionary minimalism of the design concept helps to emphasise the premium credentials of Arteor Advance in every detail. Because the simple and clear looks belie the really ambitious engineering work, the practical design skills, and the meticulous workmanship that go into the products. The deliberately pared-down design language and selection of materials are also in keeping with the broader trend towards greater sustainability.

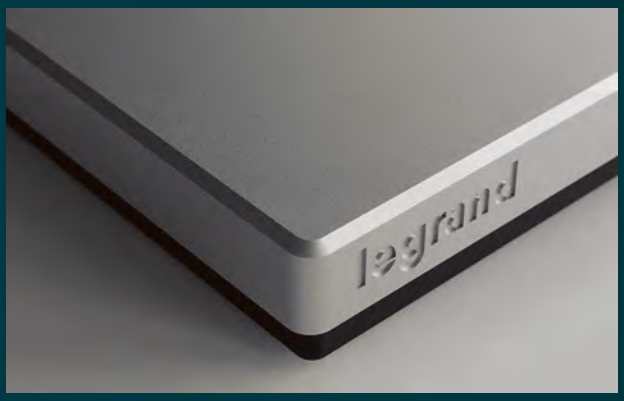


The Legrand logo – located discreetly on the side – a sign of demanding design standards

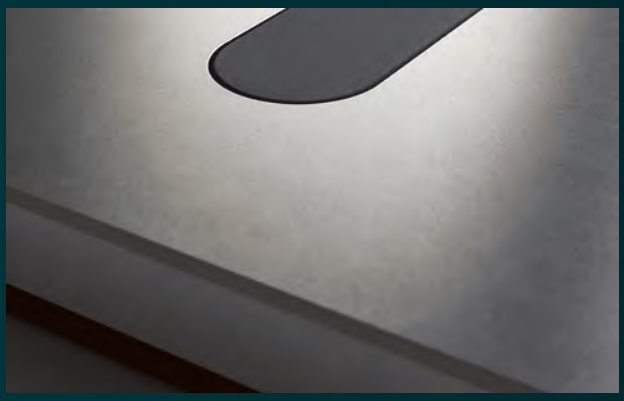


It's all in the details: a perfect fit and a chamfered plate




Cover for smart wireless batteryless switches: Futuristic form, optimal function

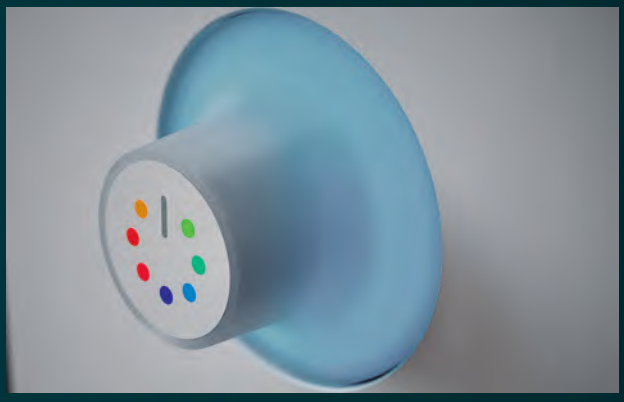

Push & Turn: refined ergonomics with luminous feedback for rotary dimmers

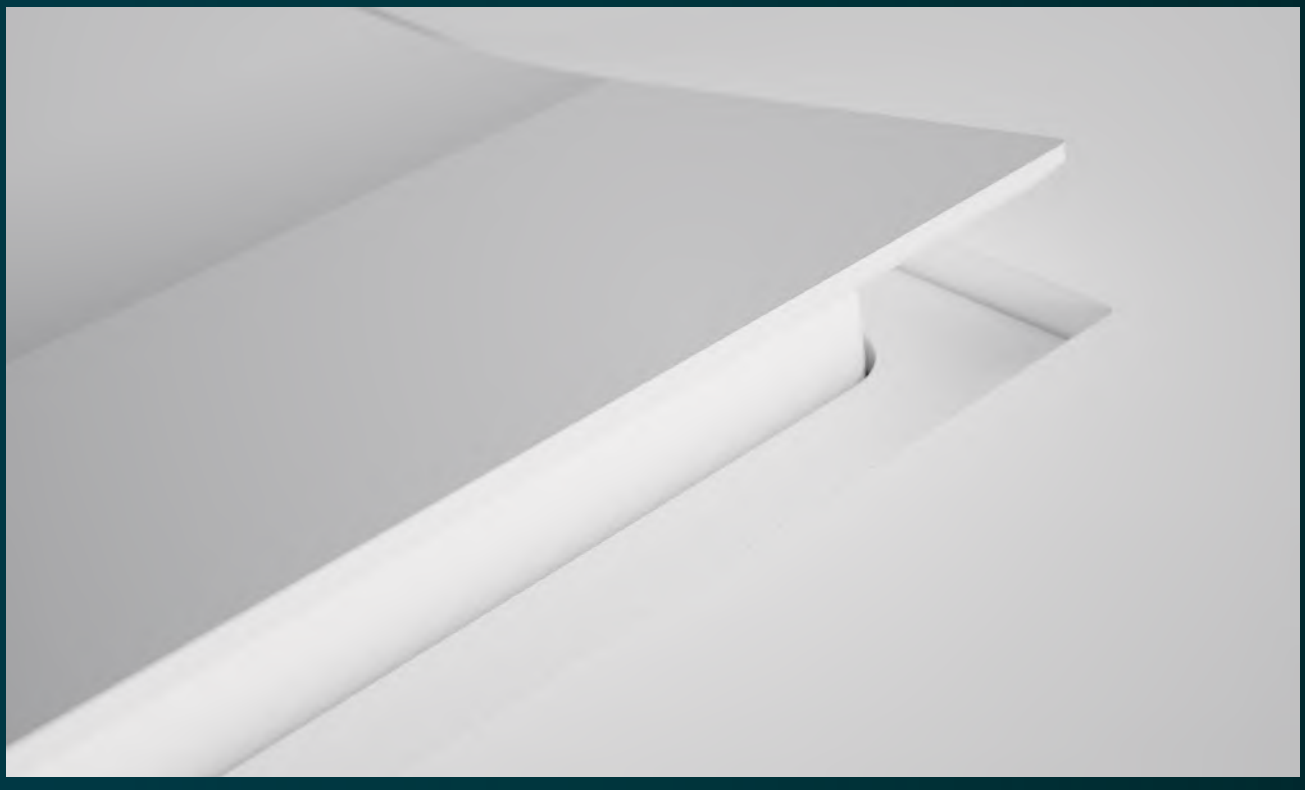

The floating rocker - a signature feature of the range

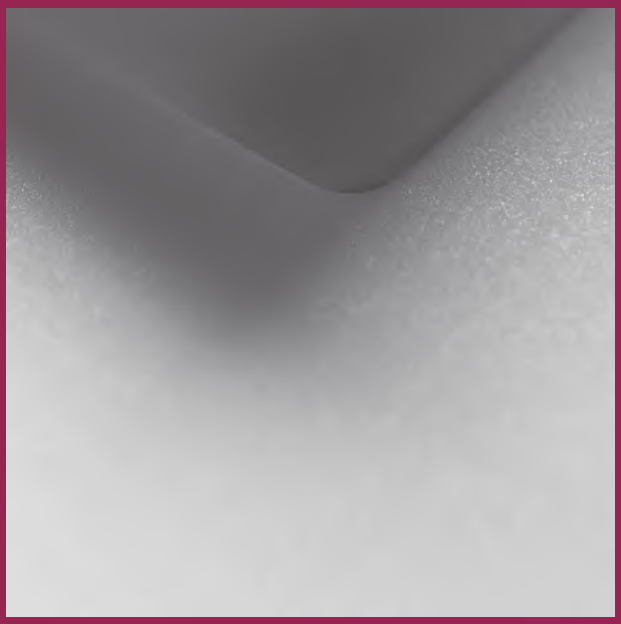








Sensual Design

Arteor Advance's premium credentials are not based on looks alone. In-depth research and meticulous attention to detail went into the development of both feel and acoustics to meet the highest standards.

The surfaces not only look classy, they are also elegant to the touch. You can feel the uncompromising quality of the workmanship with every use. In fact you can even hear it, as the switching is accompanied by a rich, soft sound. This called for highly elaborate work in terms of sound design and further underlines the demanding standards that guided the development of Arteor Advance.

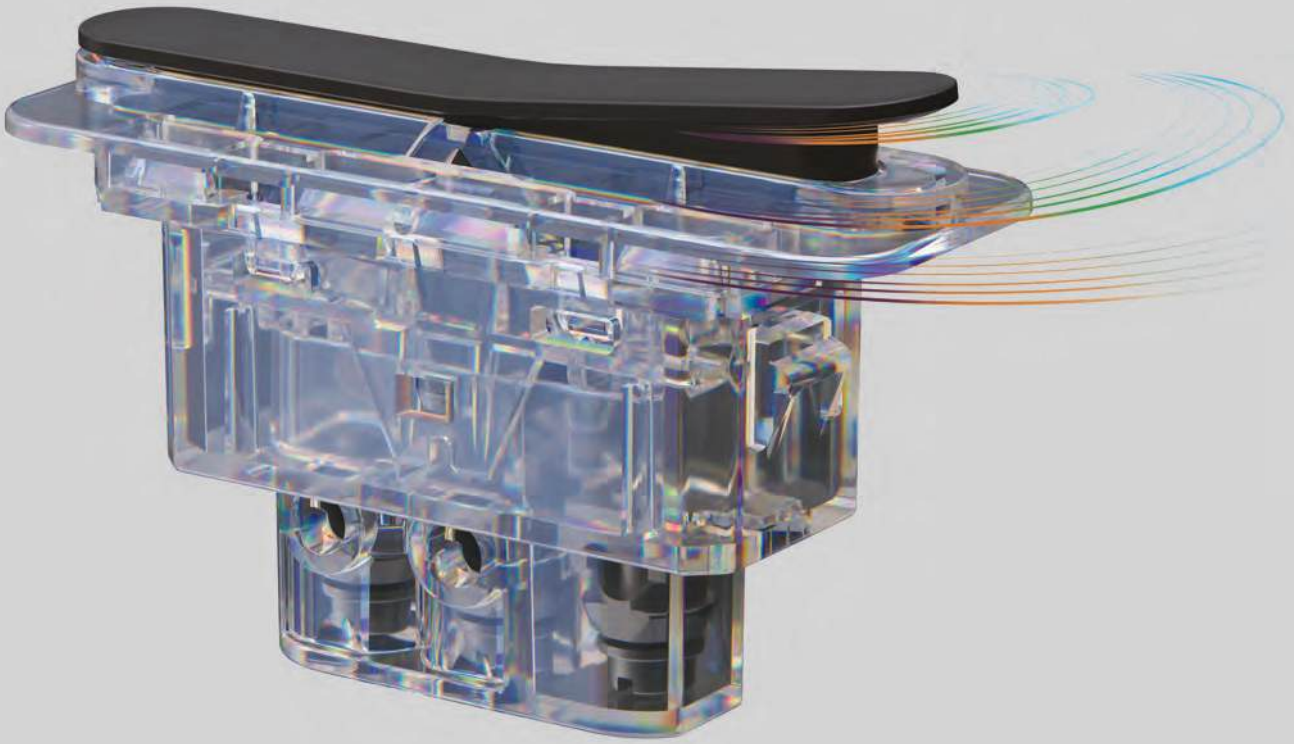



There's something organic about this design. It stirs an emotion.


Denys Toulemonde, Principal Designer




Simply cater to premium project requirements

With Arteor Advance, the designers successfully combined an attractive sense of technology with a truly exceptional visual style. The range enables interior designers with premium aspirations to satisfy their clients' individual wishes while also expressing their own unique personality.

Although Arteor Advance may appear neutral and discreet, making creative choices among the various available colours, forms and finishes allows to generate visual concepts that are truly out of the ordinary.

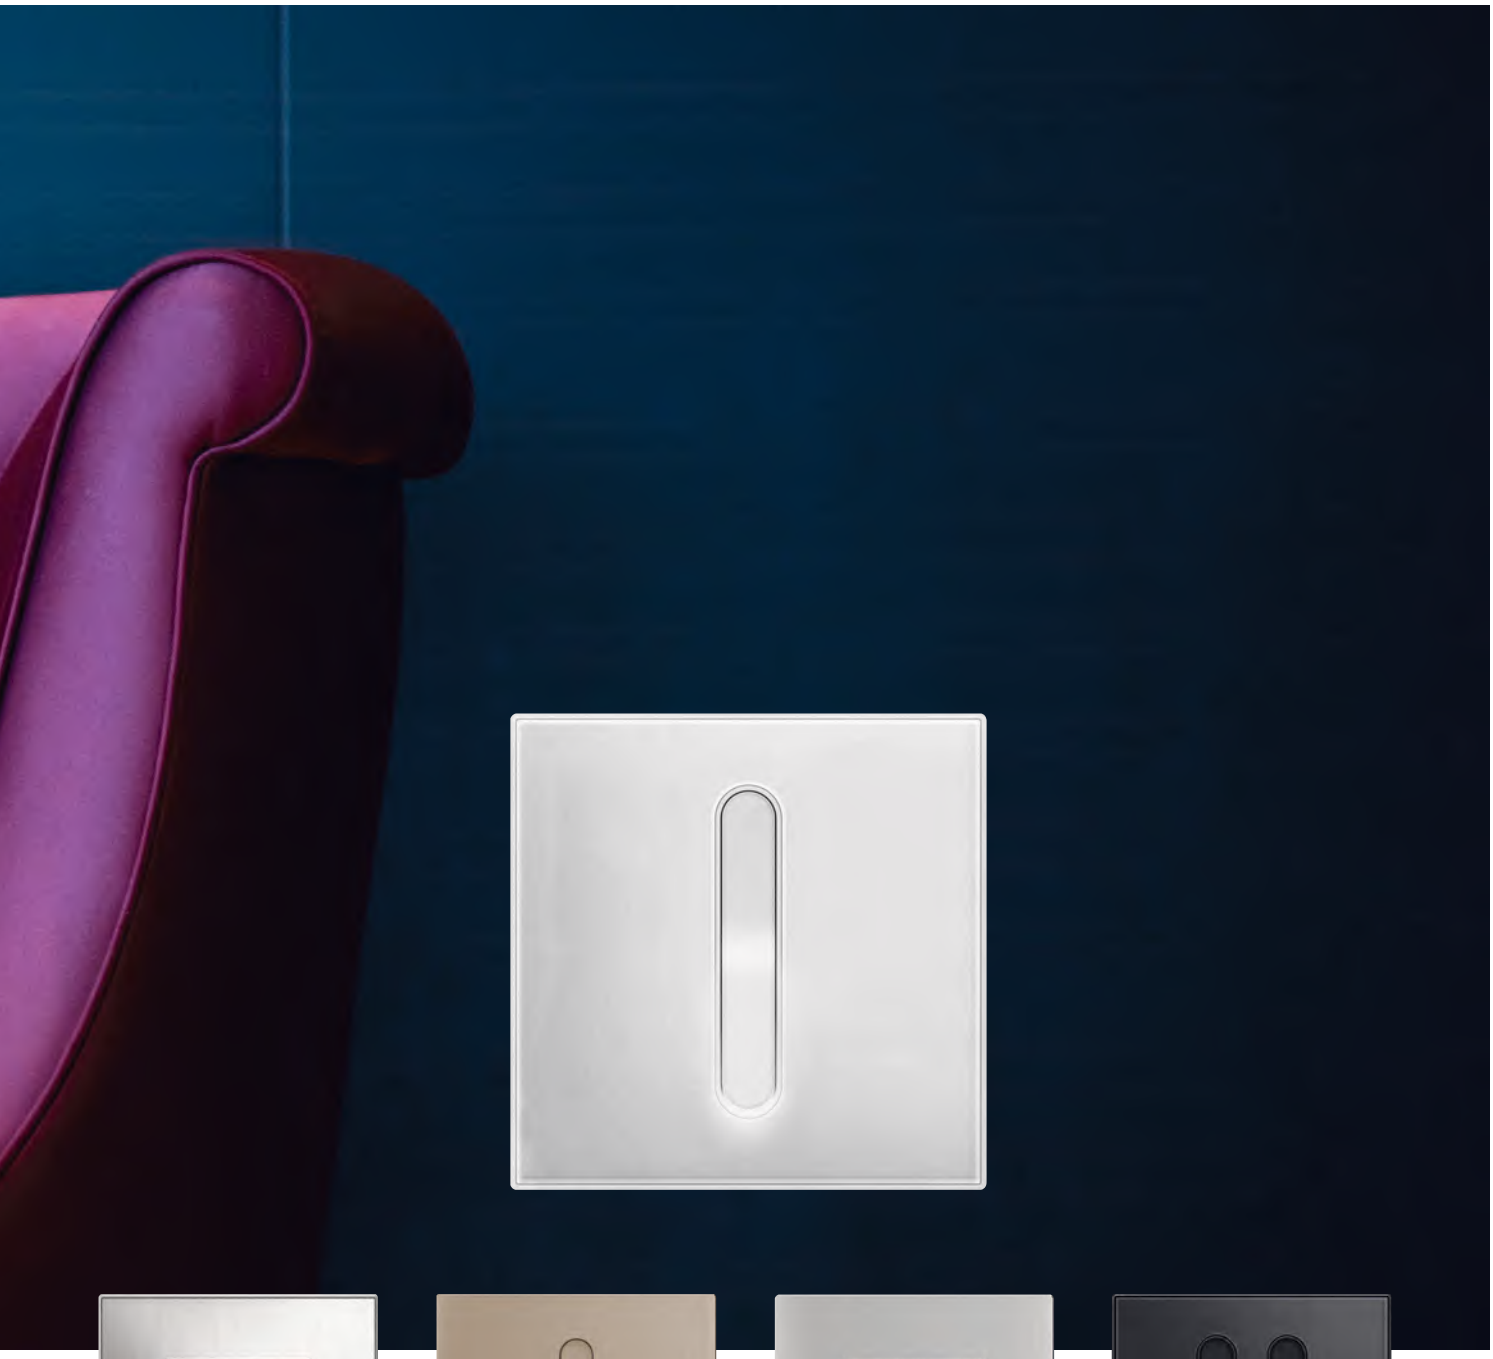












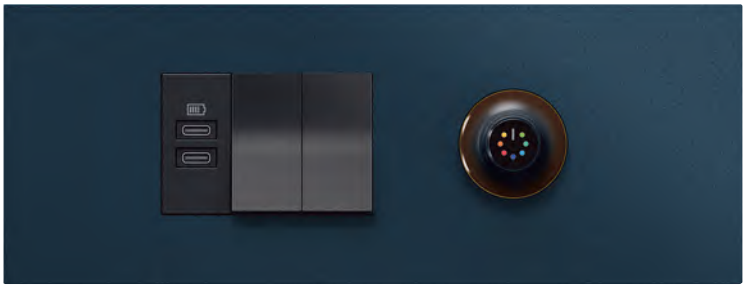



STATEMENT COLLECTION

FULL METAL



Midnight Blue



Midnight Blue


A Midnight Blue plate with an iridescent surface, which takes on different shades of colour depending on the light, is the star turn among the Arteor Advance finishes. For exceptional projects with a distinctive character.



STATEMENT COLLECTION
FULL METAL



Solid Aluminium

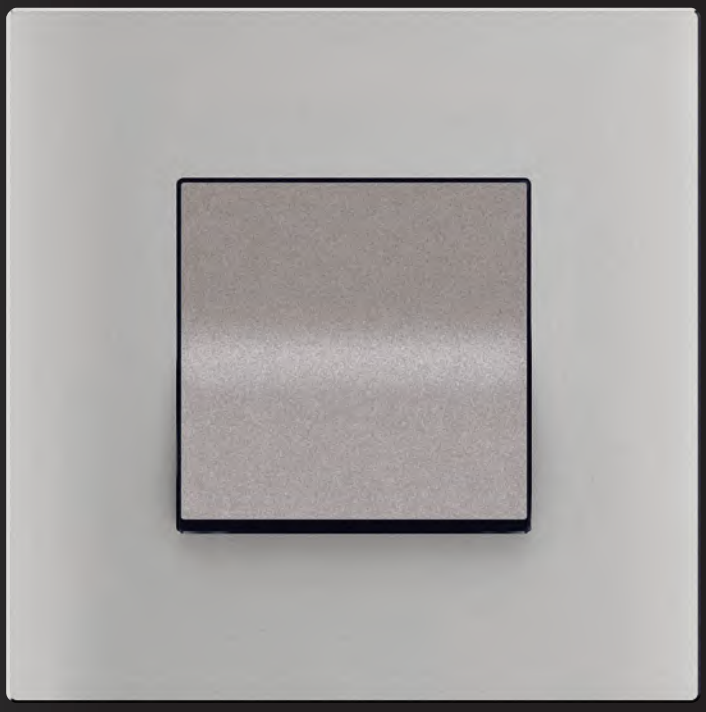

Solid Aluminium

Aluminium is the material used for the Solid Aluminium and the Midnight Blue full metal plates, a lightweight material with outstanding recycling properties. The elegant look comes from the material's fine texture.



STATEMENT COLLECTION
FULL METAL



Solid Dark Bronze



Solid Sand



Solid Black



Solid Rose



Solid Champagne

A collection of full metal plates, crafted for elegance and durability. Available in a range of sophisticated colors, these plates combine refined aesthetics with the strength of sturdy metal, perfect for projects that demand both style and resilience.



DECOR COLLECTION
METAL FINISHES



Brushed Stainless Steel



Brushed Stainless Steel

With the Brushed Stainless Steel plates, a fine layer of genuine material is applied to a base. The metal surfaces create a cool, high-quality impression, while offering a natural look and feel.



DECOR COLLECTION
METAL FINISHES




Brushed Bronze



Brushed Antique Brass



Brushed Bronze

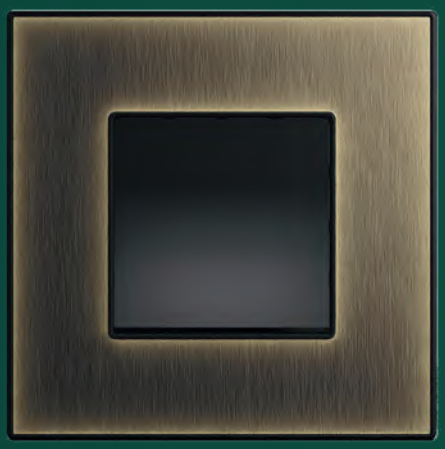


Brushed Antique Brass

The Brushed Bronze & Brushed Antique Brass metal finishes, features a refined, textured surface that enhances the visual depth and sophistication of any space. The subtle yet striking finish adds a contemporary, premium touch, while maintaining a tactile experience that invites both admiration and interaction.




DECOR COLLECTION
FROSTED FINISHES

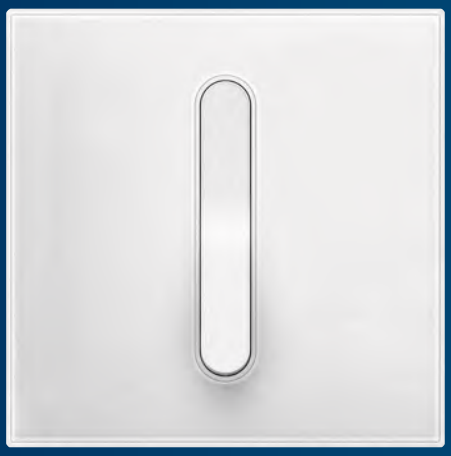

Frosted White



Frosted Black

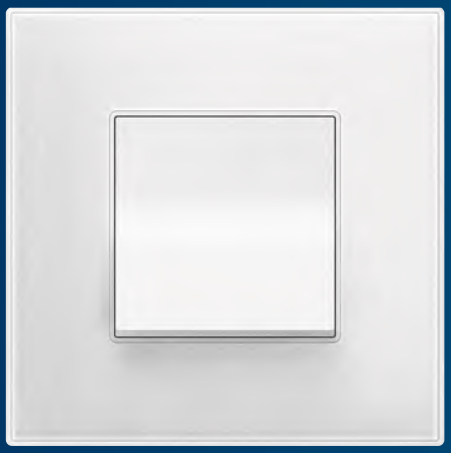

Frosted White



Frosted Black

The matt, transparent surface on a colour background creates a very particular visual effect, with a unique soft-touch feel that invites contact and interaction.



CLASSIC COLLECTION
BASIC NEUTRAL



Matt White



Champagne



Matt Black



Dark Bronze



Matt Titanium



Rose

A basic version with a plastic finish completes the range of materials. With its classic form and neutral colours, this version is a good choice for less extravagant building projects that don't want to compromise on design.

Minimalism with potential

In choosing the colour range, the designers focused on an essential yet elegant selection, without compromising on creativity. As all the colours can be combined, Arteor Advance offers all interior designers creative ways to express themselves.



"Blend-in" with a monochrome color scheme, allowing the product to remain subtle in the background while also having the potential to stand out significantly from its surroundings.



"Stand-out" with a rocker and frame in two different colors creating interesting visual accents.



Up to 18 different finishes, each with unique textures and materials, offer a wide range of creative possibilities.

Modular design for maximum flexibility

The modular architecture of the range allows to integrate a wide range of different functions within a single plate, whatever the installation standard.



Even where space is scarce, individual configurations are possible.




Full modularity for maximum flexibility.

One plate, two designs – perfect integration

Modularity is also maintained when you want to use both ergonomics, Square and Slender in one plate. Thanks to special hybrid plates, both design lines can be combined in one plate at the same time, for more creative possibilities with a harmonious look.




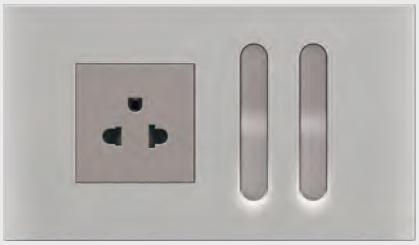

Switches in Slender design are easy to combine with socket outlets, dimmers, or USB chargers. Maximum flexibility for a wealth of combinations and a perfect look even when space is limited.


No compromise on installation safety

The tried and tested support frame from the Arteor range has been adopted for Arteor Advance without any changes. Its robustness is valued around the world, as well as its safety. It is, of course, available for all the main installation standards worldwide.

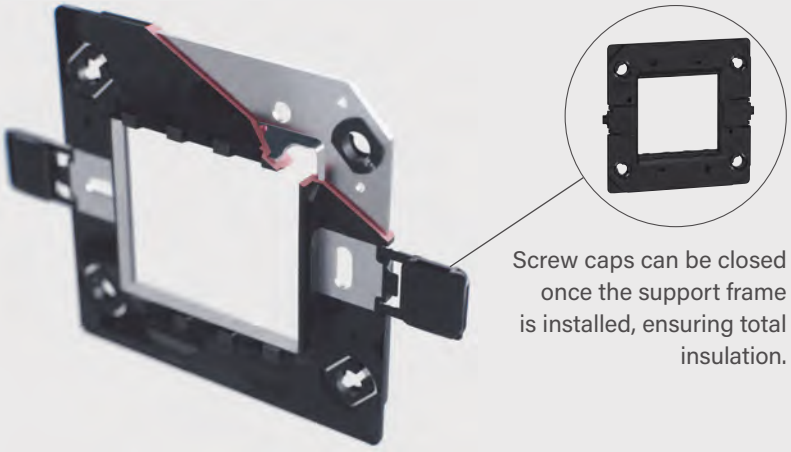

Screw caps can be closed once the support frame is installed, ensuring total insulation.


The support frame combines the robustness of a metal frame with the insulating qualities of plastic overmoulding.

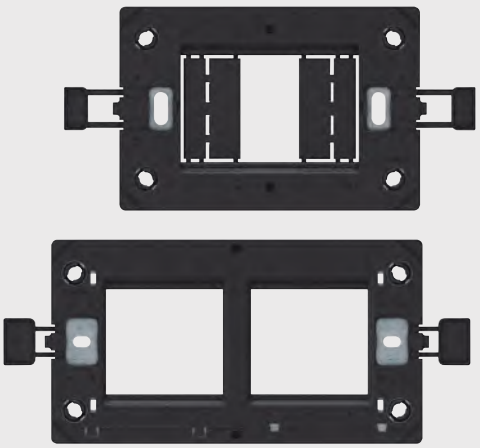

Available for all the main installation standards worldwide.

Plate adjuster for that perfect look

The new plate adjuster is another detail where Arteor Advance underlines its premium quality and uncompromising ambition: This mobile feature is integrated to the rear of the plate and allows to compensate for unevenness in the wall. For that perfect look.

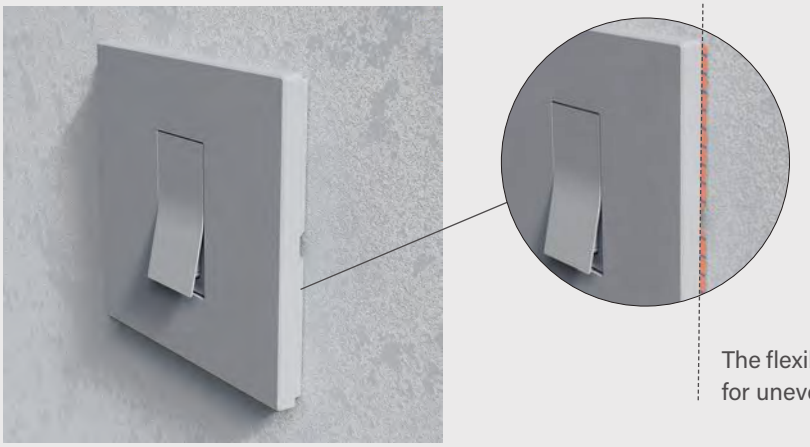

The flexible plate adjuster compensates for unevenness in the wall.




Design fit for the future

Eco-Design - A comprehensive approach

Environmental optimisation as a continuous process – Legrand has been adhering to this principle for many years. Sustainability was also at the top of the list of priorities when developing Arteor Advance. The range was developed in line with the principles of the eco-design approach which has been in practice at the company for a long time. This approach aims to reduce the environmental footprint of Legrand products over their entire life cycle, from product design stage through to their end of life. It is not focused solely on reducing our own carbon footprint. Legrand's stated aim is to develop products that also help customers to act more.

Sustainability by design

Arteor Advance represents significant progress in Legrand's circular approach to materials management. Optimising the product design right from the design stage meant that resources are saved and recyclability is improved wherever possible, from production and packaging through to logistics.

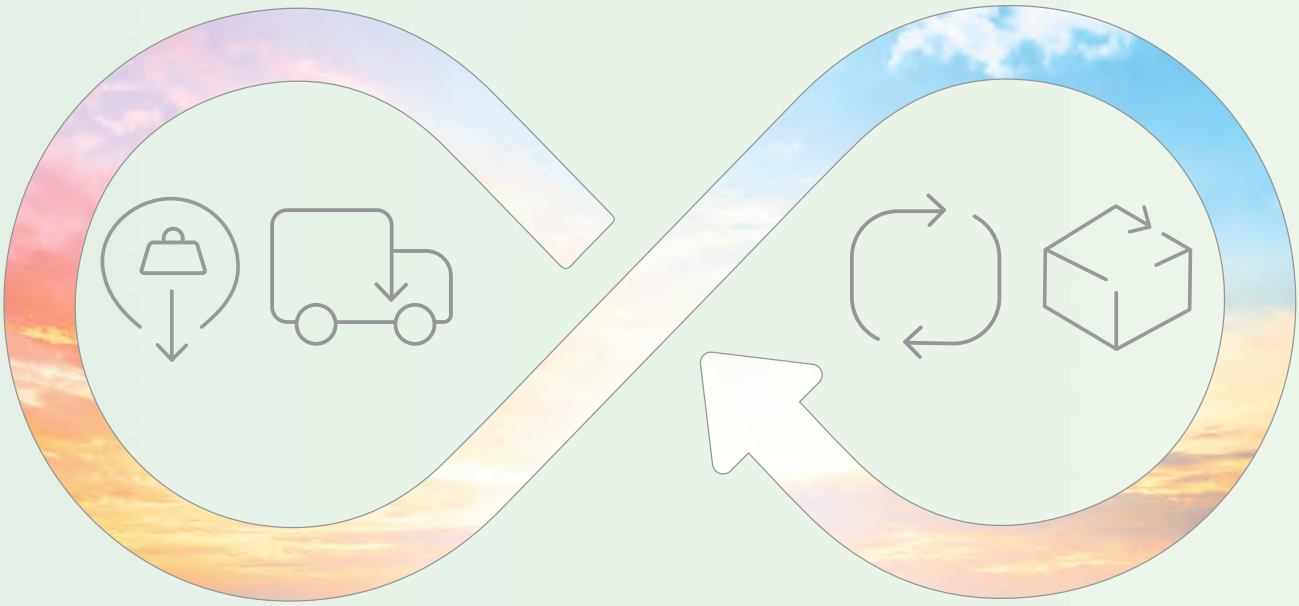

Many steps towards the goal

Weight reduction:

Every effort was made to reduce weight, not just in the selection of materials, but also with the design and the concept. The purist design of the plates dispenses with anything that is not absolutely essential. Also, the technical and mechanical components have been redesigned with the aim of using as little material as possible. This was achieved without any compromise in terms of safety, quality or robustness – and therefore the long service life of the product. Thanks to the weight savings made, and optimisation of logistics, the carbon footprint for downstream transportation was reduced by 5%.

Increased share of recycled material, improved recyclability

Legrand progressively reduces its dependence on virgin material. Accordingly, the proportion of recycled materials used for Arteor Advance has been improved. This is especially true for recycled plastics, a material that needs to meet stringent quality criteria. The new range contains 10% net recycled plastics and the figure is meant to increase over time. The metals used in the range allow for 60% recycled material. The high-end plates of Arteor Advance are made of Aluminium which is fully recyclable.

Optimised packaging

Legrand reduces the use of single-use materials and aims at reducing packaging at a minimum without sacrificing product protection. When packaging is still necessary, Legrand opts for recycled materials. It goes without saying that the cardboard packaging consists largely of recycled material and is fully recyclable. Single use plastic is no longer used for flow packs.



Environmental credentials made transparent


Product environmental profiles (PEP) will be made available for a significant part of the range. In the first step they are available for core products such as switched and unswitched 13A BS sockets and 1-module 1-way 10/16AX switches. This initiative is progressive, aiming to gradually expand the products featuring PEP.




Enjoy perfect peace of mind

Controlling, monitoring, and automating – the smart home, with all its connectivity, is making a key contribution to a better quality of life, optimised office working and high-quality hotel offerings. It offers greater comfort, safety and energy-saving options across the board.



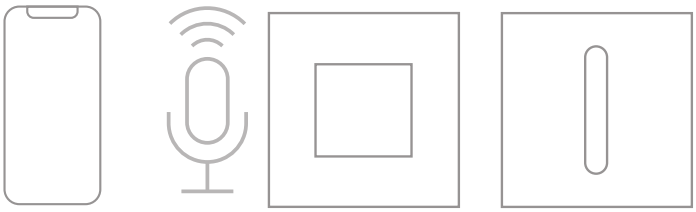

Arteor Advance combines all of Legrand's expertise in smart building and living. And it offers the appropriate technology for every purpose. Whether for new builds or modernisation projects, simple upgrades or complete systems for home automation: Arteor Advance provides the right solution for all requirements and for every area of application. Arteor Advance also combines powerful smart home solutions with exceptional design, since an attractive ambience contributes towards quality of life.

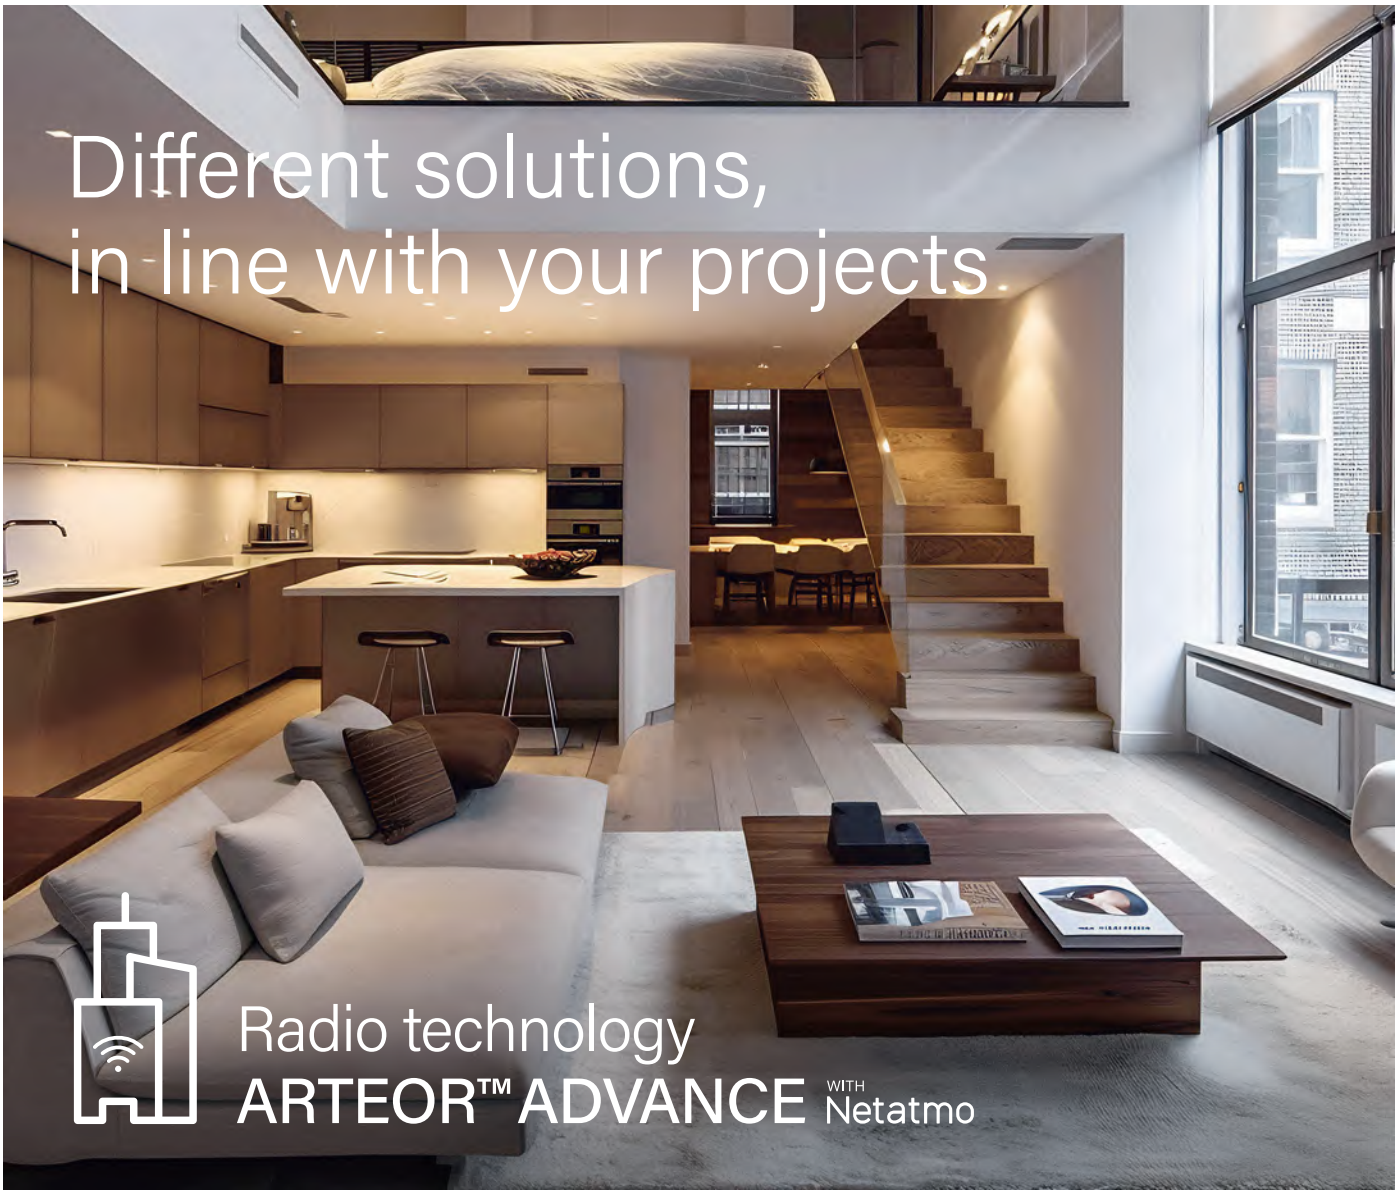

Simple, open, flexible.

Home + Control

Arteor Advance with Netatmo is the ideal solution for medium-sized projects and especially for modernization. The smart range is Zigbee 3.0 compatible and Wi-Fi enabled and uses conventional cabling. It is therefore easy to install, expand and modify as required. It is available for all common installation standards and can be used almost anywhere in the world. The Home + Control app is used for configuration as well as for monitoring and control of the system on a day-to-day basis. Of course Arteor Advance with Netatmo installations can also be operated conventionally directly via the switch or using a voice assistant.



Smart Zigbee/
Wi-Fi gateway



Smart rotary
dimmer switch



Smart fan controller
4 speeds



Endless possibilities for big new-build installations

Arteor Advance also offers the tried-and-tested Bus-based MyHOME solution for comprehensive new-build big installations as villas or projects where all functions need to be fully automated. Even more powerful than before, MyHOME opens up endless possibilities : It includes new servers featuring additional functionalities and enables to configure huge installations of up to 525 addresses. Thanks to DALI-2 compatibility it allows for coloured lighting management and new multifunction controls improve the overall control experience. The MyHOME installation can be configured easily with the Home + Project app. The Home + Control app is used to control the system. It can also be controlled via the HOMETOUCH screen and voice assistants.

Home + Control **Home + Project**




New MyHOME servers with additional functionalities



DALI-2 compatible dimming




Multifunction control

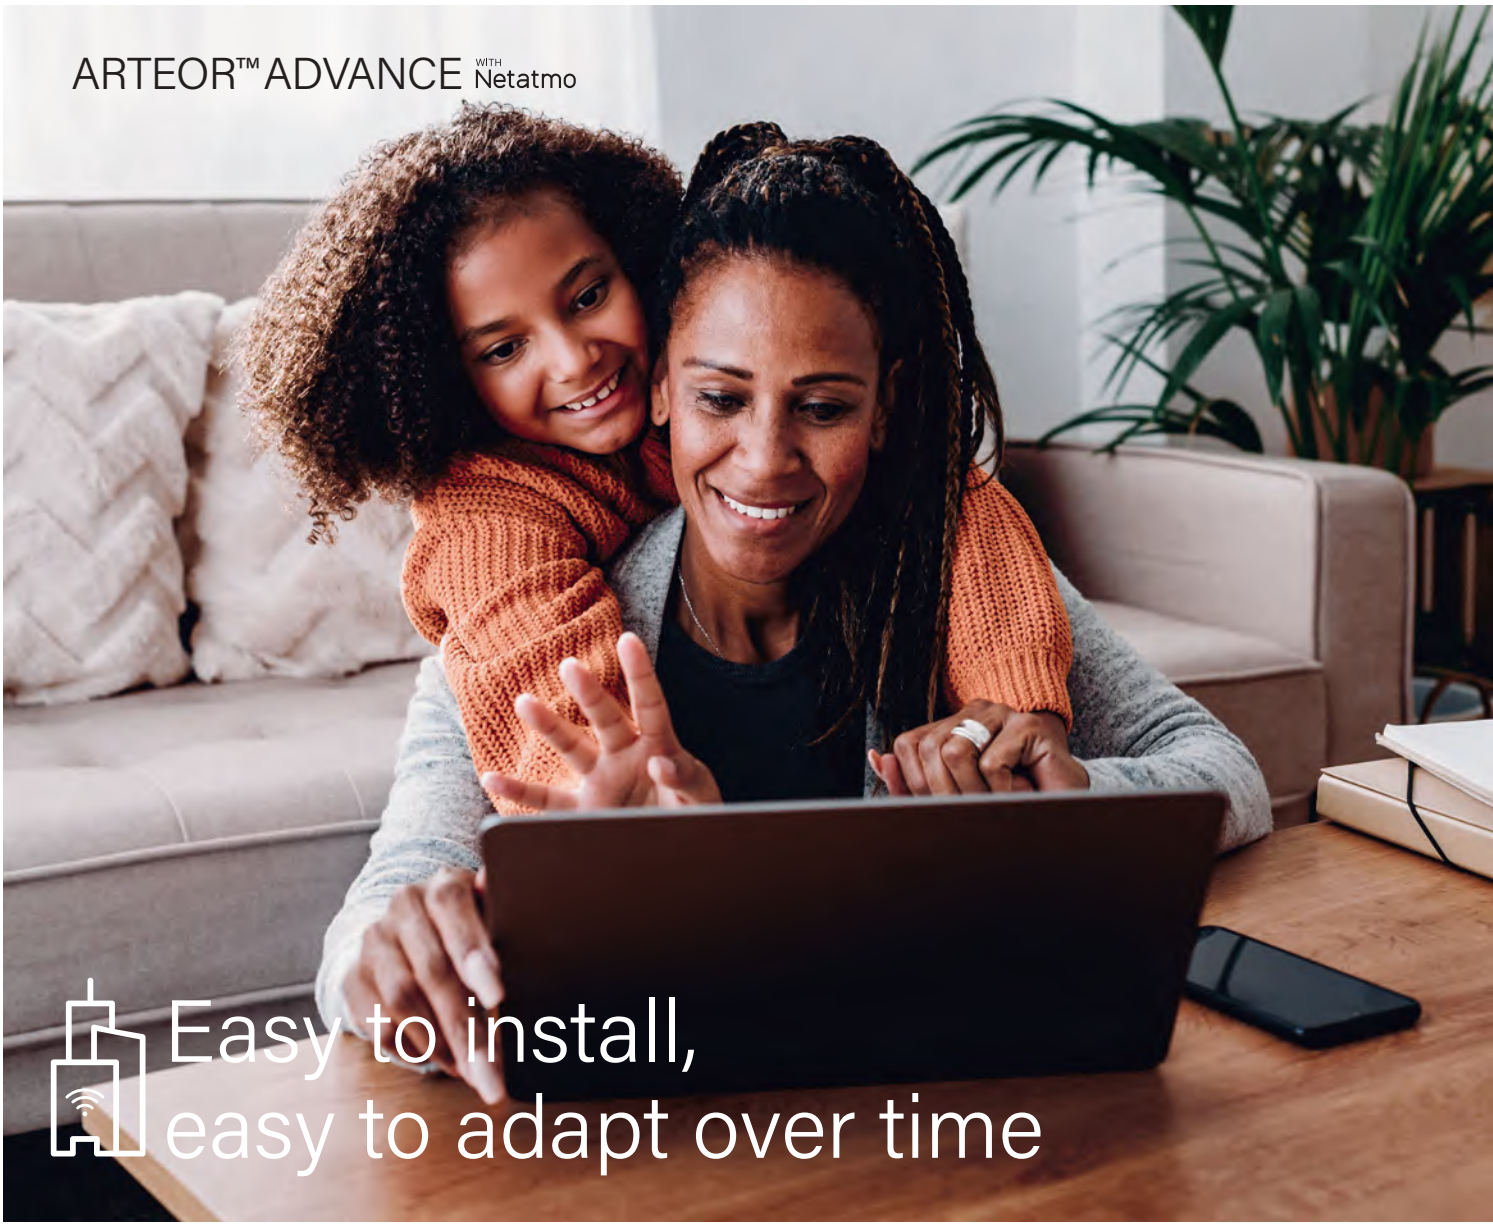

The Arteor Advance with Netatmo radio solution is Zigbee 3.0 compatible and Wi-Fi enabled. The smart components use the traditional electrical infrastructure, so they do not require extra wiring. Installation effort is cut to a minimum and radio technology with wired and wireless controls makes the solution flexible and easily adaptable.

Easy set-up of the wireless network

The gateway is essential for the set-up of the radio network and the connection to the home Wi-Fi network. It is the core of the smart installation, enabling the use of the Home + Control app and thereby convenient configuration and control of the system. Gateways are available for different installation modes.

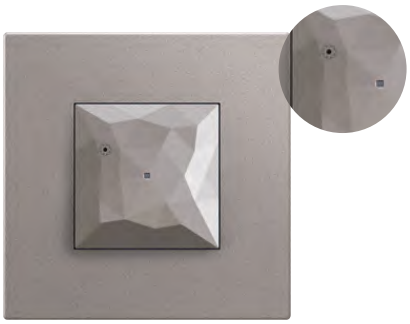

Smart Zigbee/Wi-Fi gateway with integrated microswitch



Smart mobile gateway for socket outlets



Modular gateway

Smarter Living

Arteor Advance with Netatmo offers all the functions needed to make a modern home truly smart. From switches, dimmers, controls for shading systems, fan controllers, scene switches and smart socket outlets through to dry contacts for control of garage doors and gates: the range features numerous options for smarter living.




Smart light switch with dimmer option



Smart rotary dimmer



Smart wireless batteryless light switch



Smart light switch, 3-gang



Individual, group or centralised control of shutters, shades and curtains



Fan controllers ensure a comfortable individual temperature.



Preprogrammed or customised scenes for greater comfort



Smart socket outlets – easy remote switching of standard lamps and other electrical devices

A smart ecosystem for more options

Additional components of Legrand's smart ecosystem offer even more functions that contribute to a better quality of life. These include connected thermostats and controls for air conditioning systems, smart modular devices for the electrical panel, Green'Up charging stations for electric vehicles and more. All the components can be easily controlled by the Home + Control app.

Home + Control



Air conditioning and heating control: Smarther AC with Netatmo and Smarther with Netatmo connected thermostat



Smart modular products for control of lighting and high-energy consumption appliances or tracking of energy consumption



Smart EV charging station Green'Up Home

ARTEOR™ ADVANCE WITH Netatmo

Light means quality of life


Light plays an important role in well-being. Light creates atmosphere, encourages desired moods and ensures safety. Alternating colours, warm or cold light, with different light intensities - modern light fittings make it easy to implement the right lighting for any situation, any room and any occasion. Arteor Advance simply makes controlling the lighting throughout the entire house a smart process.

Impressive in terms of design as well as technology, Arteor Advance innovates both with its "with Netatmo“ radio solutions and its MyHOME DALI-2 compatible dimming devices.




Smart multicolour dimmer

Everything about this new dimmer is exceptional, including its design, ergonomics and technical capabilities. It can be used to control ZigBee 3.0 multicolour lights (e.g. LED strips, spotlights, bulbs). Individual lighting moods can easily be created and adapted to personal requirements by selecting the desired light colour, light intensity and light temperature on the multicolour dimmer.

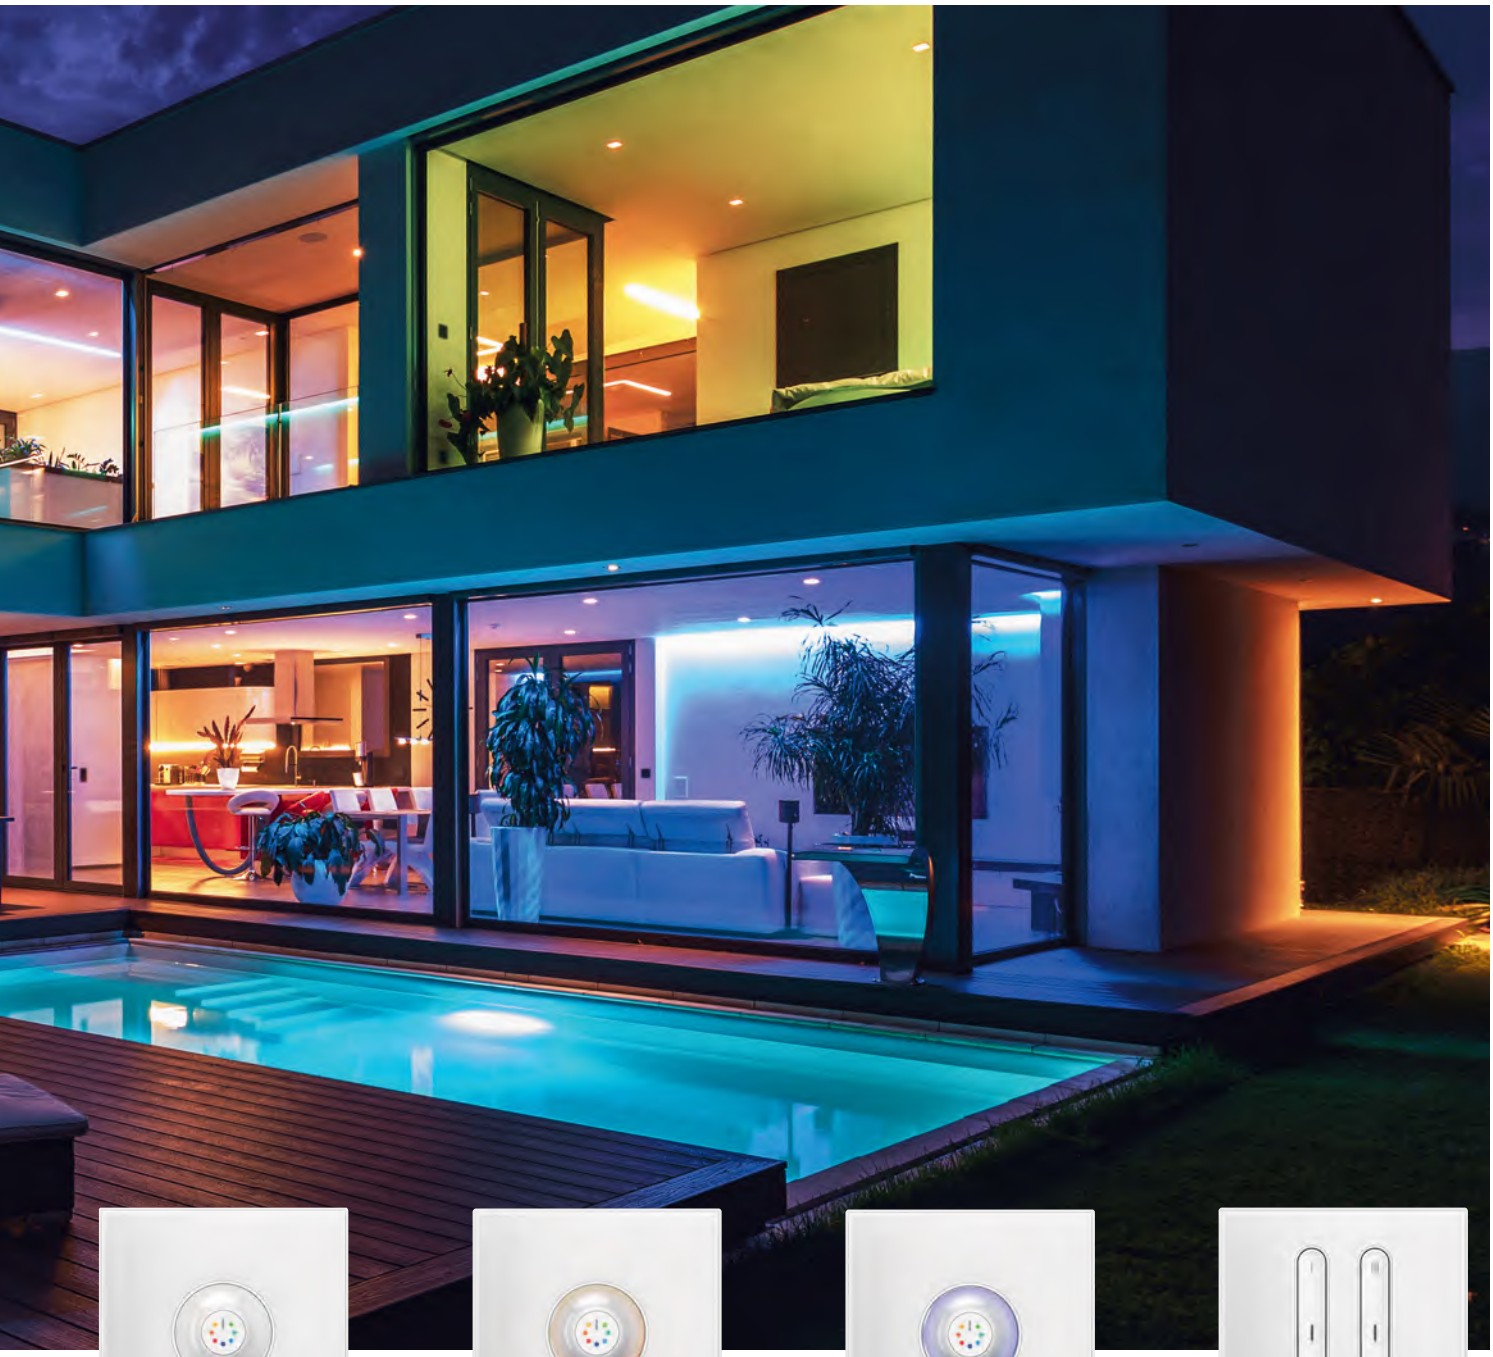

When the desired lighting mood has been set, the colour on the rotary knob changes accordingly. This light signal on the multicolour dimmer turns off automatically after a few seconds.

Smart wireless multicolour switch in Slender version

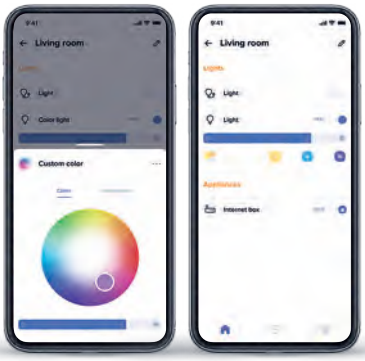

Controlling light via the app

The Home + Control app enables up to 3 individual lighting moods to be preset and then accessed and controlled directly on the device. This makes it easy for users to create concentration-enhancing cold light for time spent working from home, for example, or to set warm softly dimmed lighting for a relaxing evening. Gamers can also choose a setting with strong colours to ensure the right mood.

Home + Control


ARTEOR™ ADVANCE WITH Netatmo

Built-in sustainability

Arteor Advance with Netatmo also offers almost all wireless controls in a batteryless version as an alternative. This new generation of wireless energy-harvesting switches generates the power they need for the switching process themselves. The wireless batteryless switches are particularly durable and maintenance-free and enable flexible installations to be created for use over the long term. This also makes them an ideal solution for hotels and small commercial buildings. With their lower impact on the environment and their longevity they are a further example of the commitment to sustainability and resource conservation made through Arteor Advance.

Certified Durability

Following rigorous tests, this switch was certified to have an operating life of at least 1 million operations.
The wireless batteryless switch is covered by three patents.

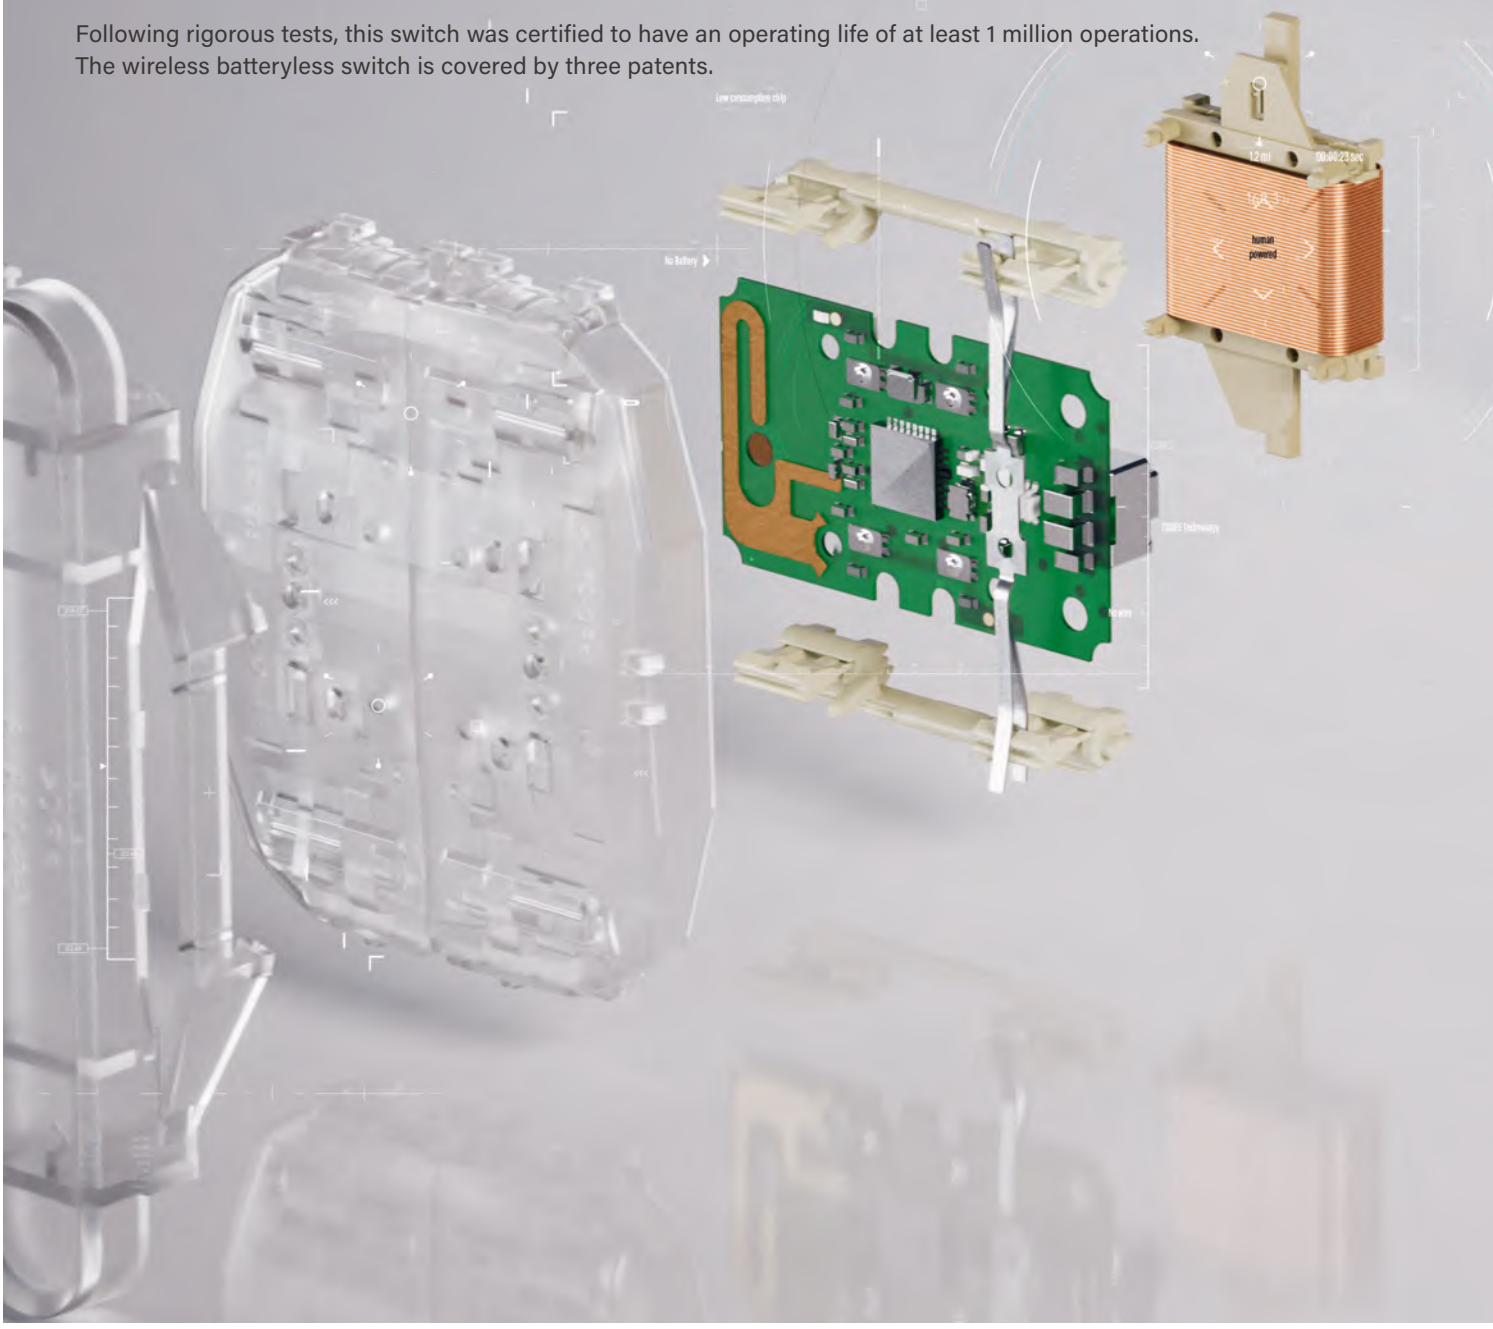



Smart wireless
batteryless light switch

Smart wireless batteryless
roller blind/curtain switch

Smart Home/Away
wireless batteryless switch

Smart Wake Up/Sleep
wireless batteryless switch

Smart 4 scenes
wireless batteryless switch
“Day/Night/TV/Read“


ARTEOR™ ADVANCE WITH Netatmo
Making smart
modernisation easy


Arteor Advance with Netatmo is a modular radio solution which uses the traditional electrical infrastructure. It's particularly suitable for modernisation projects where existing buildings are being upgraded to incorporate smart solutions. Installations can be easily expanded without having to work on the wiring and functionality can be modified at any time via wireless smart components or using the Home + Control app. Arteor Advance with Netatmo installations can thus be repeatedly adapted to changes in living patterns, with only a minimum effort required.




Easy installation
All wired Arteor Advance with Netatmo devices can be installed using the traditional electrical infrastructure.



Easy extension
The installation can easily be expanded and upgraded using wireless controls.

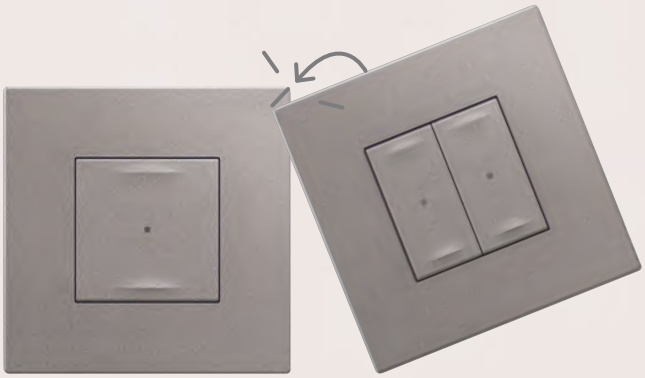


Easy configuration
Wireless components can be paired by simply tapping the wireless control three times onto the wired device you wish to control.

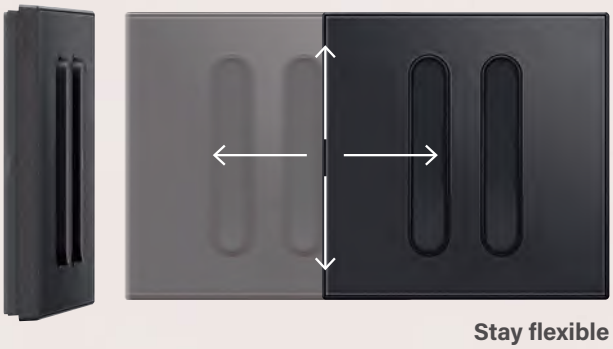


Stay flexible
Wireless controls can be placed anywhere.



Customised scenes can be changed and extended as you wish.

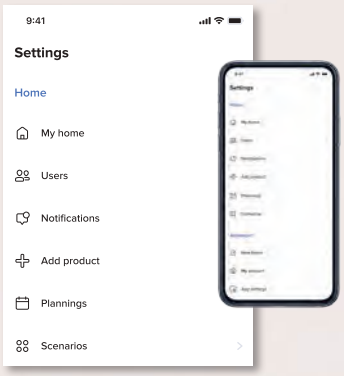

Configure and control via the app.

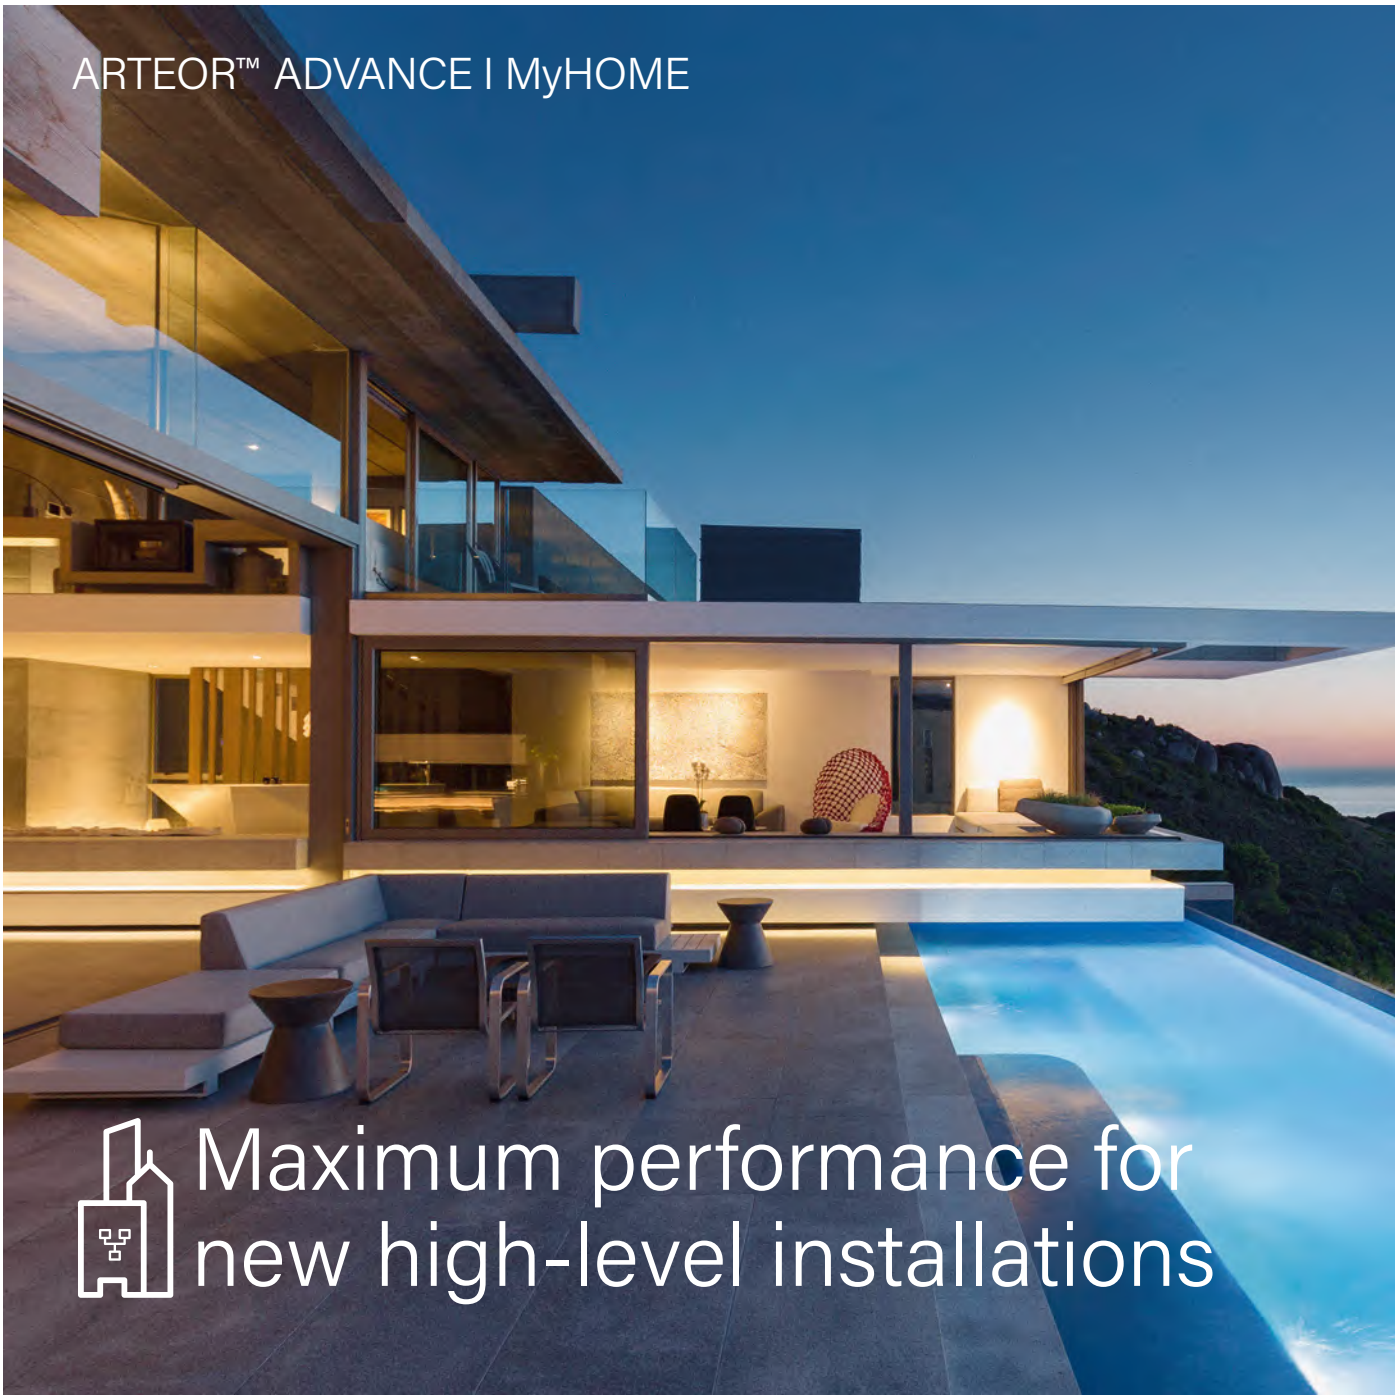

Unlimited possibilities

Home + Control Home + Project

Arteor Advance MyHOME is the go-to option wherever maximum performance is required for high-level installations in new large premises or villas. With its new servers, the extension interface and DALI-2 compatible devices the system now offers even broader possibilities for extension, third-party integration and premium control.



The new server for SCS installations is only 4 modules wide and natively offers additional functions such as humidity management.



In the dedicated version for third-party integration, the server can be open for local integration into advanced home automation systems such as RTI, Crestron and more.



The new MyHOME address extension interface now allows to configure huge installations of up to 525 addresses



Cutting-edge lighting management with DALI-2




DALI-2 compatible dimmer and gateway. RGB-RGBW control via the Home + Control app or on the HOMETOUCH touch screen

Large-scale control of light and colour

Bus-based solutions for larger-scale lighting control systems with up to 64 lighting units can also be implemented with the DALI-2 protocol in conjunction with a MyHOME installation. These products are no longer used solely in the commercial sector but also in major projects for high-end residential construction.

The new DALI-2 dimmers combine maximum functionality with the sophisticated look of control devices in the Arteor Advance design. They provide all individual lighting control features such as ON/OFF, dimming, RGB - RGBW - colour and tunable white - and fade in/out.

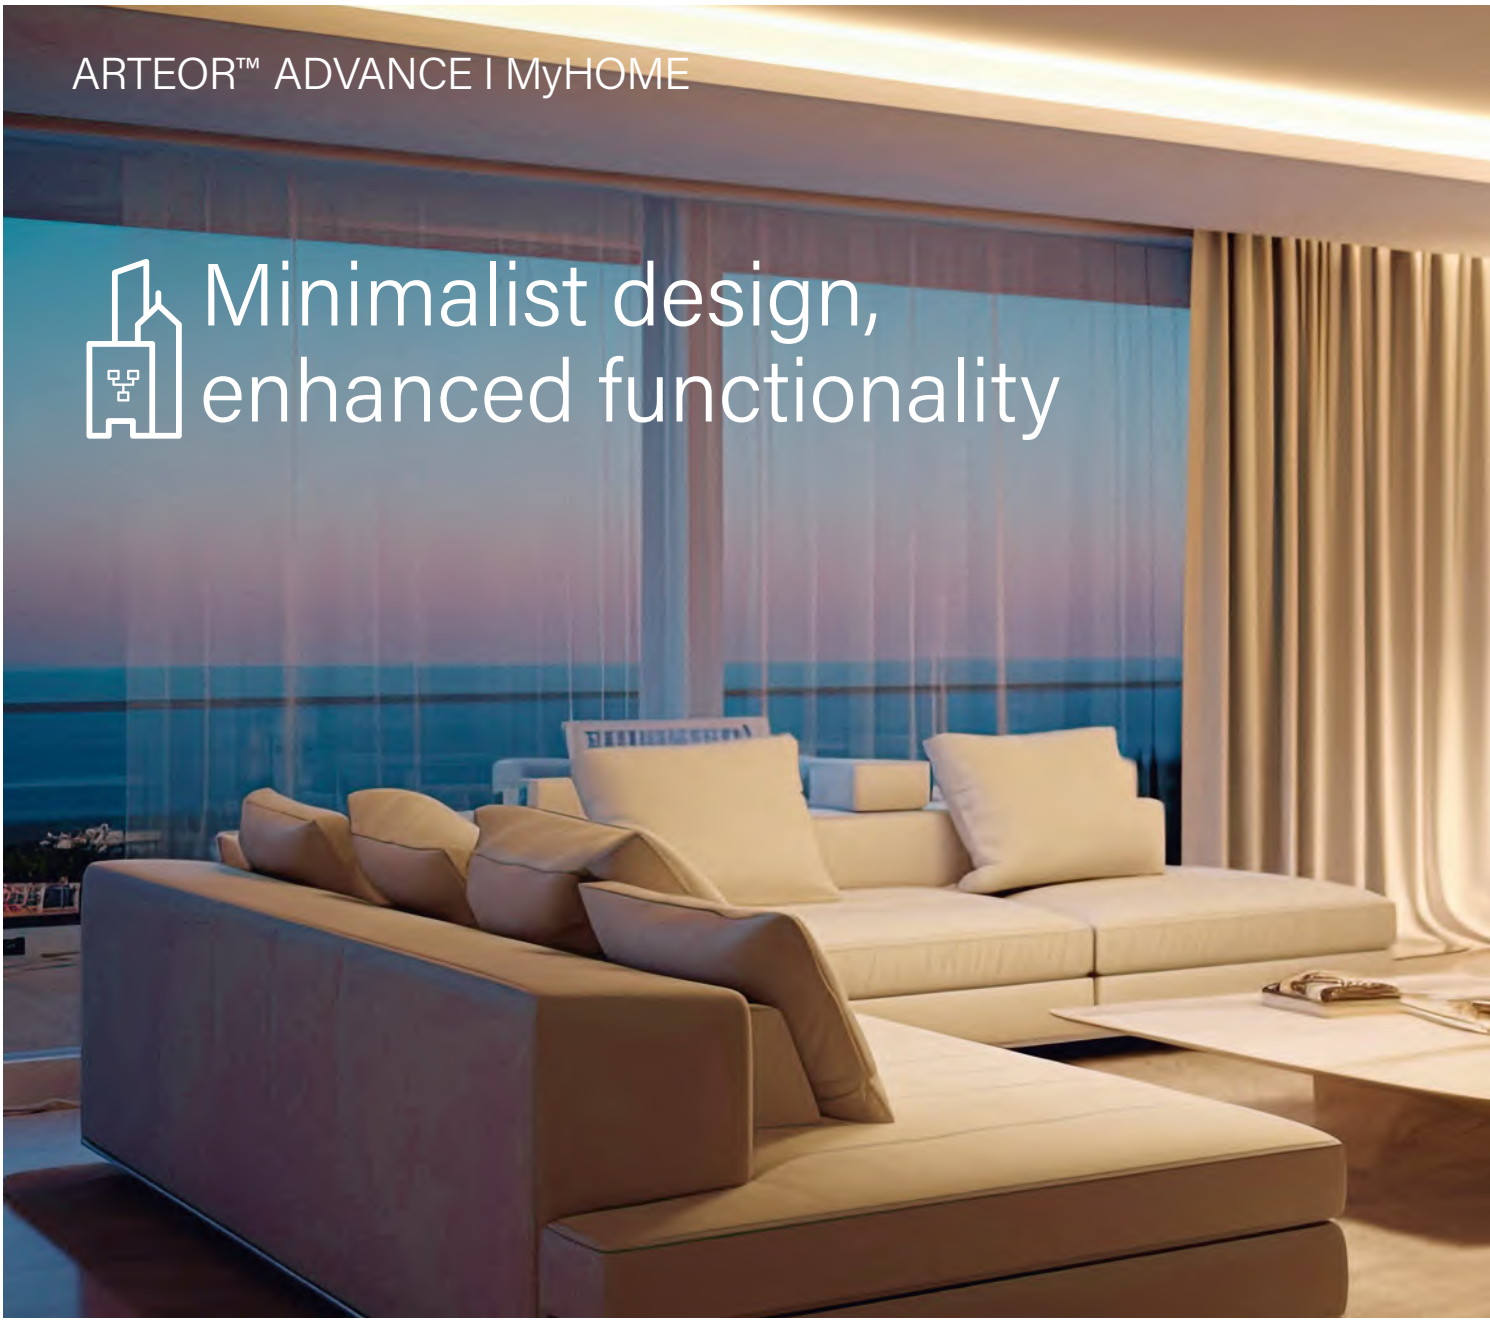

Home + Control Home + Project

Multifunction control for more functionality in less space

The new Bus-based multifunction controls enhance the control experience and optimise the management of groups and scenes in a minimum of space: Up to 4 functions in 2 modules or up to 6 functions in 3 modules can be combined to suit individual requirements and personalised with new dedicated Arteor Advance key covers.



Management of up to 4 functions in 2 modules, i.e. lights, dimmers, scenes





Management of up to 6 functions in 3 modules i.e. lights, dimmers, shutters, scenes



Premium control experience

Bus controls in Arteor Advance design with intuitive markings provide a premium control experience and add an elegant finishing touch to the installation.



Bus dimming control



Bus control for shutters and shades



Bus 4 scenes control

Two technologies, one app for perfect home control











Home + Control


Control your home with Home + Control

The Home + Control app acts as the control centre for Legrand's smart home solutions. Whether you opt for the flexible, radio-based solution Arteor Advance with Netatmo or Arteor Advance MyHOME, the high-performance solution using Bus SCS technology: Home + Control is suitable for both options. It allows convenient control of the different components of the two solutions to suit individual preferences.


Home + Control also offers useful visualisation options for switching states, room temperature, energy consumption or alarm notifications. This information can be used, even remotely, to trigger actions for greater comfort and safety or for optimised energy consumption.

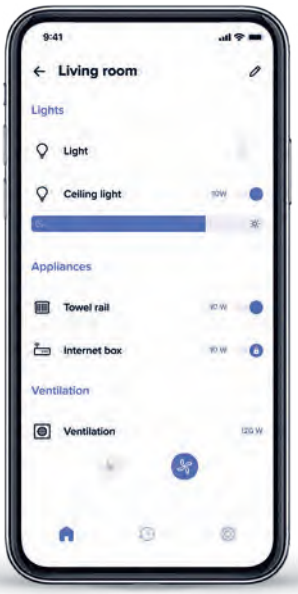

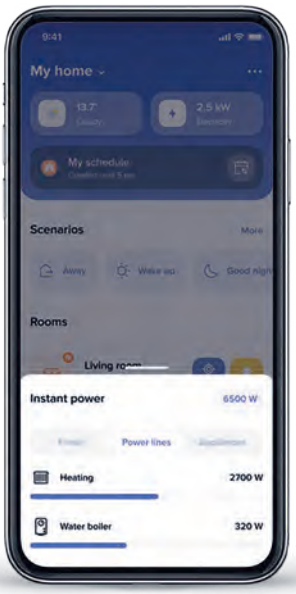

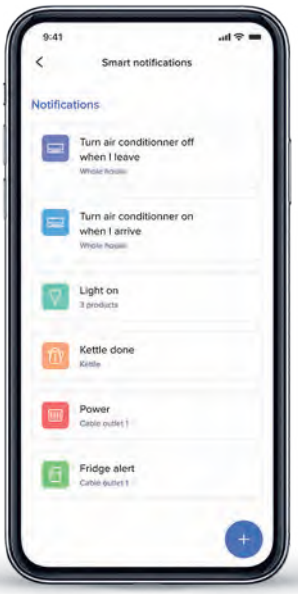



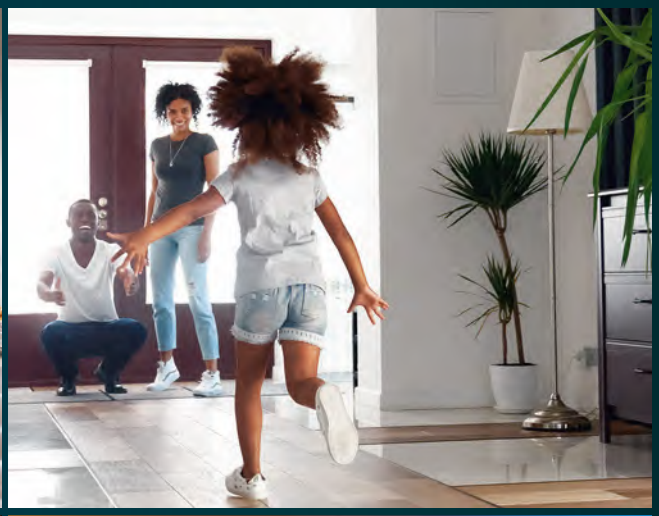





In-built intelligence. For a better quality of life


In buildings fitted with Legrand Smart Home solutions people can live and work with greater comfort, safety and sustainability. The technology uses scenes, preprogrammed actions and automated sequences to take over many everyday activities.

The home knows the preferences of those who live there, depending on the time of day, how it is used, or even external conditions, and behaves accordingly. And this technology forgets nothing, never sleeps, and knows clever ways to save energy.

Convenient automation of everyday routines is available across both technologies, radio and Bus-based.








Bespoke automation of everyday life

Personal everyday routines can be set to run automatically at a given time, or called up as preset or self-programmed scenes.

SCENES




Preset scenes
The typical everyday routines Wake Up/Sleep and Home/Away are preset in the app and can be individually adjusted.




Self-programmed scenes
Because every life situation is unique, additional scenes can be configured according to individual preferences and can be adjusted at any time.

SMART AUTOMATIONS




Smart Automations
This feature enables automation based on external triggers. For instance, a particular device status (e.g. light ON/OFF) or a measured value (e.g. power consumption above a determined value), as well as weather data can be used to trigger an action.

SCHEDULES




Time-dependent automation
Programmed schedules can be used to run actions automatically at a particular point in time.



Useful routines
Schedules can be used e.g. to simulate human presence in order to deter uninvited visitors.

Home + Control

SMART NOTIFICATIONS



The latest information at all times
The app allows users to stay connected with their home at all times. Users receive an alert if anything unusual is happening and can take action remotely. In addition, smart notifications can be programmed in line with the "if this, then notify" principle.



Automated savings

The advantages of Arteor Advance smart solutions are clearly evident in the options for living more sustainably. Temperature management in particular helps users save both energy and money.

Individual and efficient


Schedules can be programmed, for example, to respond to sunlight at any time of the day or year. Shutters will be closed automatically in summer, to keep out the heat and reduce energy consumption for air conditioning. The opposite applies in winter, with shutters being opened so the sun can warm rooms and save on energy used for heating.









Making optimal use of energy

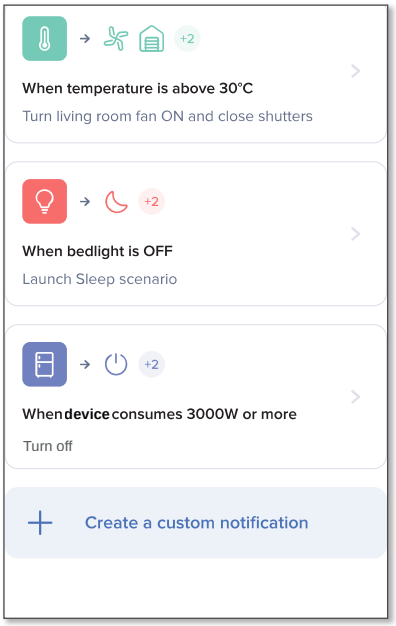

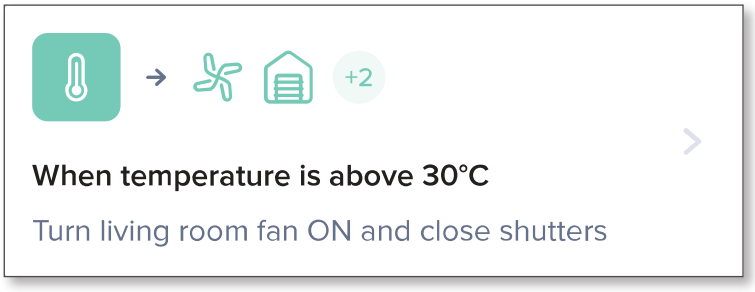

Smart Automation
The new Smart Automation app feature allows the temperature to be managed in an even smarter and more convenient way: the "When - then" principle enables, for instance, use of the latest local weather data that is supplied to the system via a cloud API.

The built-in intelligence mechanism then uses this data and the preset trigger to make a decision independently as to how the roller blinds, air conditioning or heating should best be adjusted in each case.

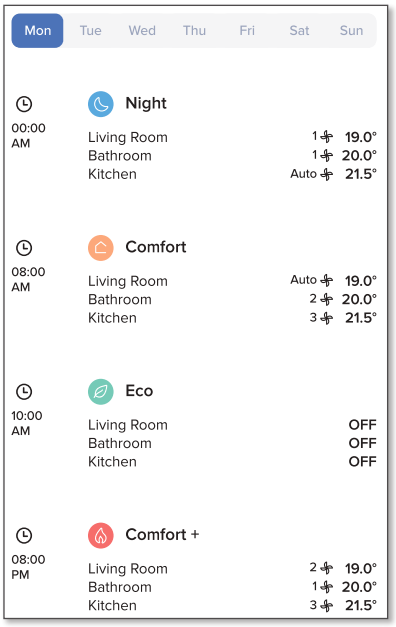

Temperature Schedule
Efficient energy-saving measures can also be individually programmed to suit your personal daily routine. The temperature in each individual room can be preprogrammed in a targeted manner to suit how it is used. And if there is an unexpected change to the daily routine, people can easily control the heating or air conditioning remotely via the app and come home to a pleasant temperature – even when they finish work early.



Home + Control


Energy management at a glance

Home + Control offers various options for energy monitoring and management. The clearly displayed, easily accessible information on energy consumption and production can help drive measures to adopt a greener behaviour and save energy.




Energy consumption reports for efficient monitoring


Energy reports provide detailed information about energy consumption in the home, in real time or based on past data. This makes it possible to identify clearly energy-intensive devices from monthly or annual comparisons and pinpoint behaviours associated with high energy consumption.

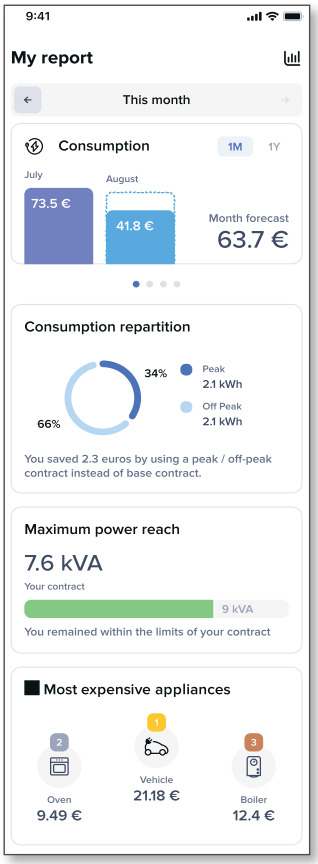


Energy reports(1)
The in-app dashboard provides clearly organized information and direct access to consumption graphs.

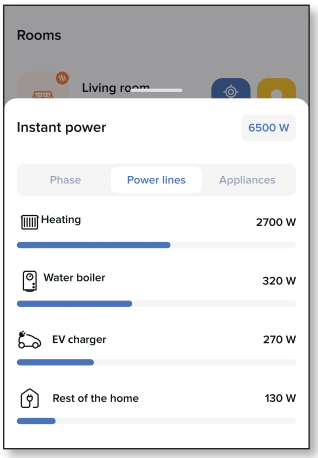


The Consumption Live View provides real-time data on energy consumption and helps users understand their own consumption habits more effectively and change these accordingly.

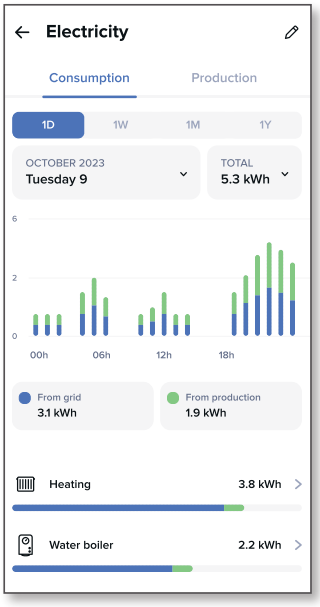


Detailed historics
Daily/Weekly/Monthly/Yearly consumption data in local currency / kWh.

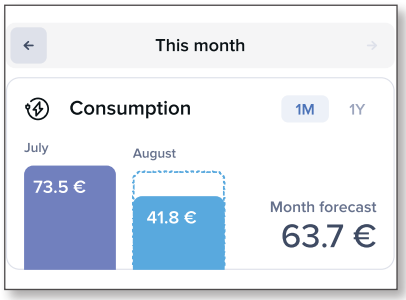

Smart consumption forecasts(1) for the next month are generated based on consumption history, the previous month's consumption, and weather data. Ideal for monitoring any possible discrepancies and reviewing any corrective measures that may be required.

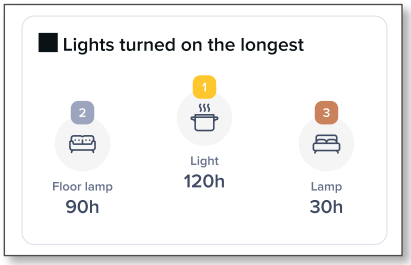

Identification of the most frequently used lamps(1).

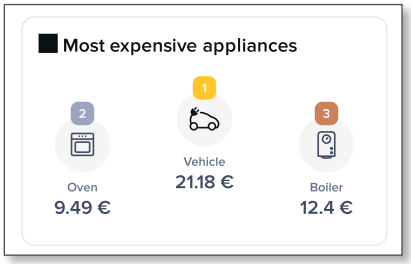


Identification of the most energy-intensive devices(1).

(1) For availability of energy reports for MyHome installations, please contact us.




Monitoring of solar power production


As the Home + Control app allows both monitoring of energy production and consumption, owners of photovoltaic installations can monitor their production of solar power combined with their electrical consumption.

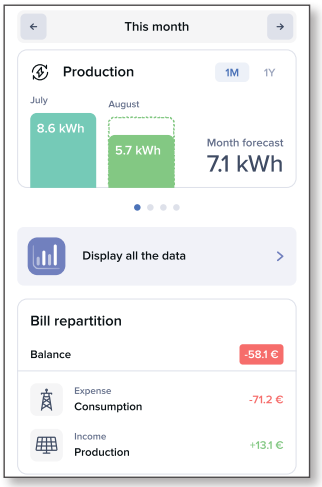


Forecast energy production levels from the photovoltaic system can help with planning the use of specific loads.

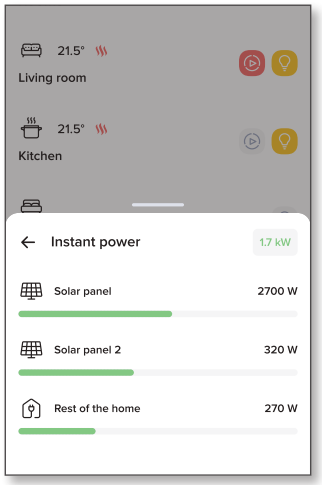


Real-time analysis of solar power production can provide suggestions for how to optimize operations.

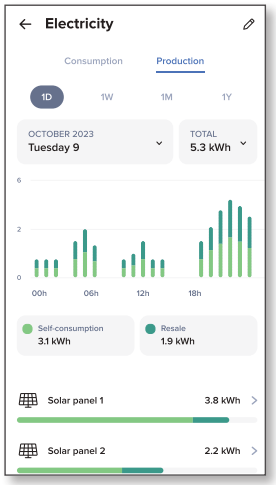


Energy production history including data on self-consumption and power supplied, with cost values.



Smart load management avoids black-out

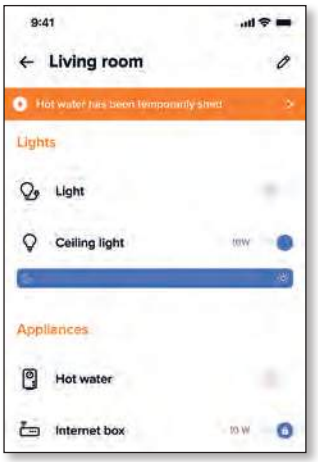

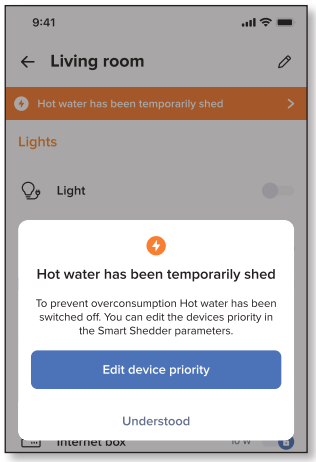

It sends an alarm when a device is switched off to avoid a black-out, so that appropriate action can be taken.

Supporting third-party interoperability

Legrand's Smart home solutions can be integrated into third-party systems, whether hardware or software. Active support is provided to developers, system integrators and other partners who want to help develop a seamlessly integrated smart home. Regardless of whether they work with radio or Bus-based solutions.


Efficient support for third-party integration

Two developer portals offer useful services and functions to help system integrators and app developers create their own solutions. Many resources are available such as documented API, a helpcenter and more. Specialist teams support third-party developers in their work with smart solutions from Legrand. They provide support on local interoperability as well as on cloud interoperability.

Looking for support on local interoperability?

Check out the developer portal Works with Legrand.
This interoperable portal with many useful services and functionalities enables developers and system integrators to bring added value for end-users.

WORKS WITH legrand

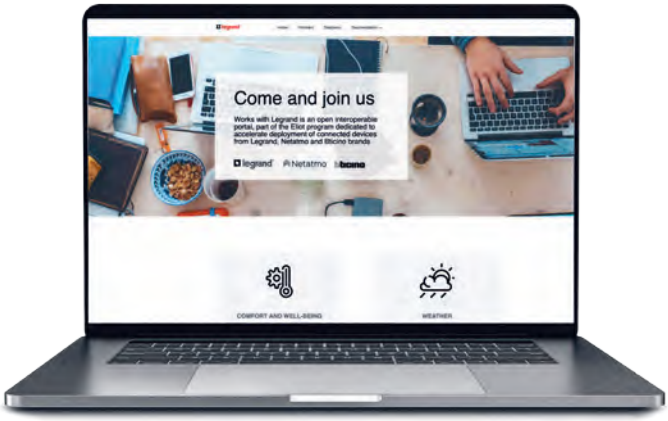




Looking for support on cloud interoperabiltiy?


Check out the developer portal Netatmo connect.
This platform brings a specific API documentation aimed to application developers to manage smart devices from Legrand and Netatmo with there own apps.

Netatmo connect

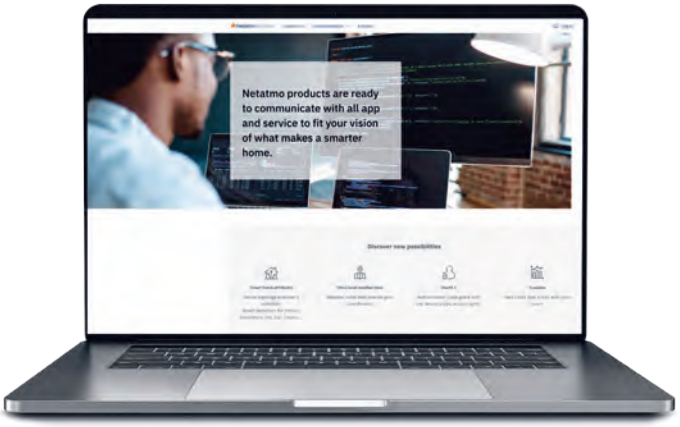

Live as you want

Everyone has their own ideas about how to arrange their living space, and people's individual preferences regarding the functionality of electrical equipment will vary widely too. With Arteor Advance, everyone can arrange their own private space accordingly and accommodate as much comfort or energy saving as they want. All in a premium consistent design.

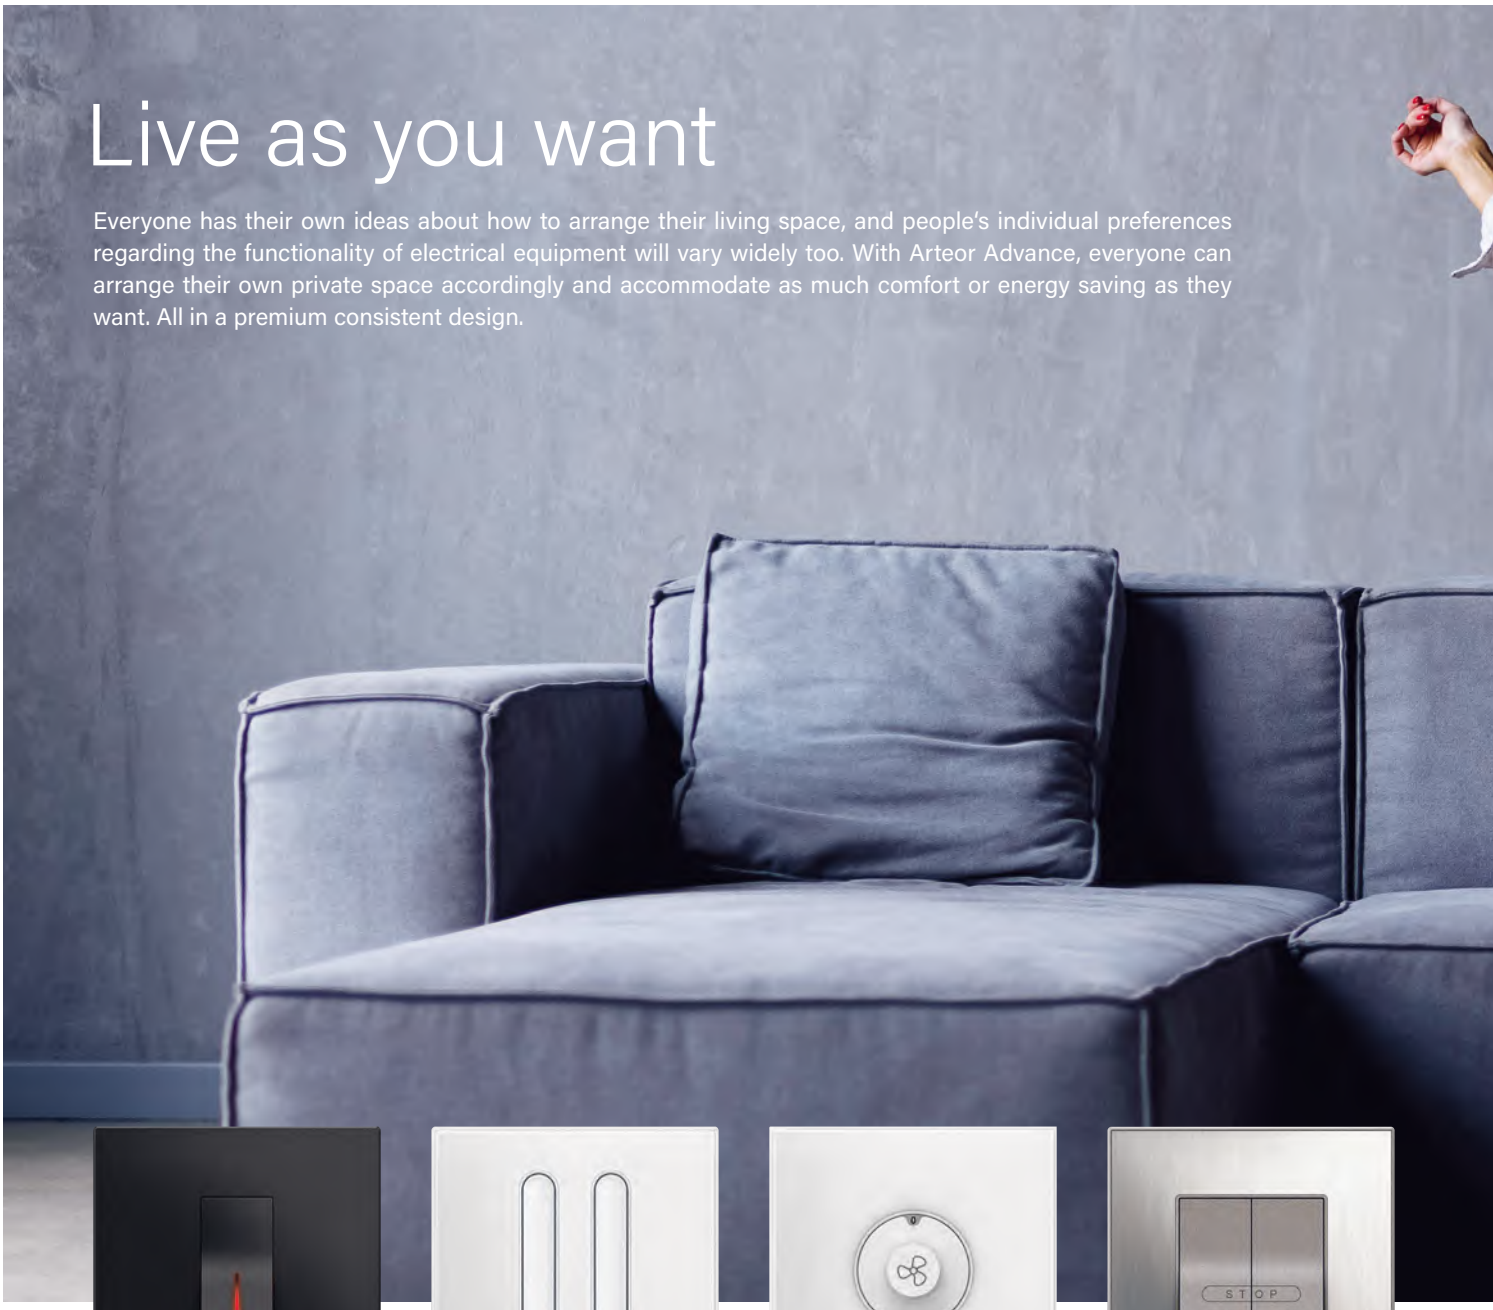

Switch with indicator

Smart 2-gang wireless batteryless light switch

Rotary fan controller

Electric roller blind push-button



Exploiting every potential

The new generation of LED dimmers and LED automatic switches are fully LED compatible and can also be used for all other types of modern loads. This makes it possible to exploit the full energy saving potential of LEDs, without losing out on convenience.



13 A British standard double pole switched socket outlet with USB Type-A and Type-C chargers

13 A British standard 2-gang switched socket outlet with USB Type-A and Type-C chargers

TV-R-SAT sockets



Intelligent & powerful: the new USB chargers

Arteor Advance meets the current USB-C standard with new chargers that integrate harmoniously into the design of the rest of the electrical installation. In addition to their design, they also impress with their performance: they are powerful enough to charge laptops. They also enable "fast charging" and protect the batteries of the connected devices with Power Delivery as they only supply as much power as is needed for charging. Available in 30W, 45W and 63W.

Working with ARTEOR™ ADVANCE

The boundaries between life and work are becoming increasingly blurred. That's why Arteor Advance offers solutions that make life and work both easier and more comfortable, while making optimal use of the possibilities offered by connectivity. The understated design improves both quality of life and productivity.







Arteor Advance mechanisms can be incorporated into Pop-Up boxes or On Desk devices of the Incara range: seamless integration into furniture - power and data within easy reach.



All-in-one consistent design:
Power supply for all devices, data outlets and USB chargers with enough power for charging a laptop.



LED compatible motion sensors help to save energy as they only switch lights on when needed.

Contactless switching

A new switch offers a more hygienic way of using lights and doors. It controls lights or opens doors without direct contact. Just position your hand close by, and the desired action will be triggered. In offices, hotels and anywhere lots of people use switches, the contactless switch is a valuable and convenient alternative to traditional solutions.







Contactless switch for control of lights or doors.


Welcome to the
ARTEOR™ ADVANCE Hotel

Looks and functionality are equally important in hotels. Arteor Advance adopts a premium approach to both. Everything that a guest in a high-end hotel might expect is available from Arteor Advance: from the key-card switch and the external unit with the “Do not disturb“ and “Make up room“ signs, to the individually configurable bedside panel with 6 or 8 modules and powerful USB chargers.






Key-Card Switch



Hotel room call indicator
External unit: displays calls in the corridor.



Bedside panel: Dedicated markings allow for easy identification of the different functions: Master ON/OFF, control of bedlights, curtains, roller blinds, and more.



Internal unit: allows to select the desired setting “Do not disturb/ Make up room“.



13 A British standard double pole switched socket outlet with USB Type-A and Type-C chargers



Double USB Type-C charger, 63 W, Fast charge feature: Power Delivery



Thermostat compatible with Guest Room Management Systems

Lots of power with gentle fast charging

USB chargers are an essential feature, and not just for mobile working. They provide enough energy to charge laptops and other devices. The batteries are charged in a particularly resource-efficient manner by intelligently adjusting the charging current to the needs of the devices connected. The new USB chargers with an elegant design are available in a wide range of versions, including in combination with socket outlets.

Best prospects for satisfied guests

The design of Arteor Advance blends in perfectly with the Legrand guest room management solutions such as UXOne, a radio based solution ideally suited for 3 to 4 star hotels.



Customised comfort for your customers

Guest room management solutions enable automation and pre-programmed scenes to take the in-room experience to another comfort level and make the relationship with the guest even more personal.




UXOne smart thermostat and guest room controller

UXOne - All in One


UXOne is a smart thermostat and guest room controller. It is also a radio gateway for all room devices. It allows control of HVAC, shading and light scenes management according to room occupancy and without an additional room controller. By connecting to a supervision software, it enables centralized control of room status. The thermostat can be integrated into third-party systems thanks to BACnet and MQTT protocols. UXOne is the ideal solution for retrofit projects, since it adapts to the existing hotel infrastructure.

Multiple features, consistent design

The smart guest room management devices can be combined seamlessly with the Arteor Advance range. This enables a guest experience to be created that is carefully styled end-to-end in a harmonious design with personalised scenes. The options range from dedicated control devices such as the “Do not disturb/Make up room“ smart internal unit, smart Arteor Advance with Netatmo light and curtain controls via USB chargers through to power and data sockets.



Radio based “Do not Disturb/ Make Up Room“ switch




Seamless integration with lighting controls



Double USB Type-C charger 30 W, fast charge feature: Power Delivery



Smart Master ON/OFF wireless batteryless switch



Smart 4 scenes wireless batteryless switch “Day/Night/TV/Read“


Maintenance-free and sustainable

Wireless batteryless controls with specific hotel icons are particularly cost-effective: long-lasting, little to no maintenance required, and the best possible personalised in-room experience for the guest.

green power



For further information please check out the dedicated UXOne brochure.

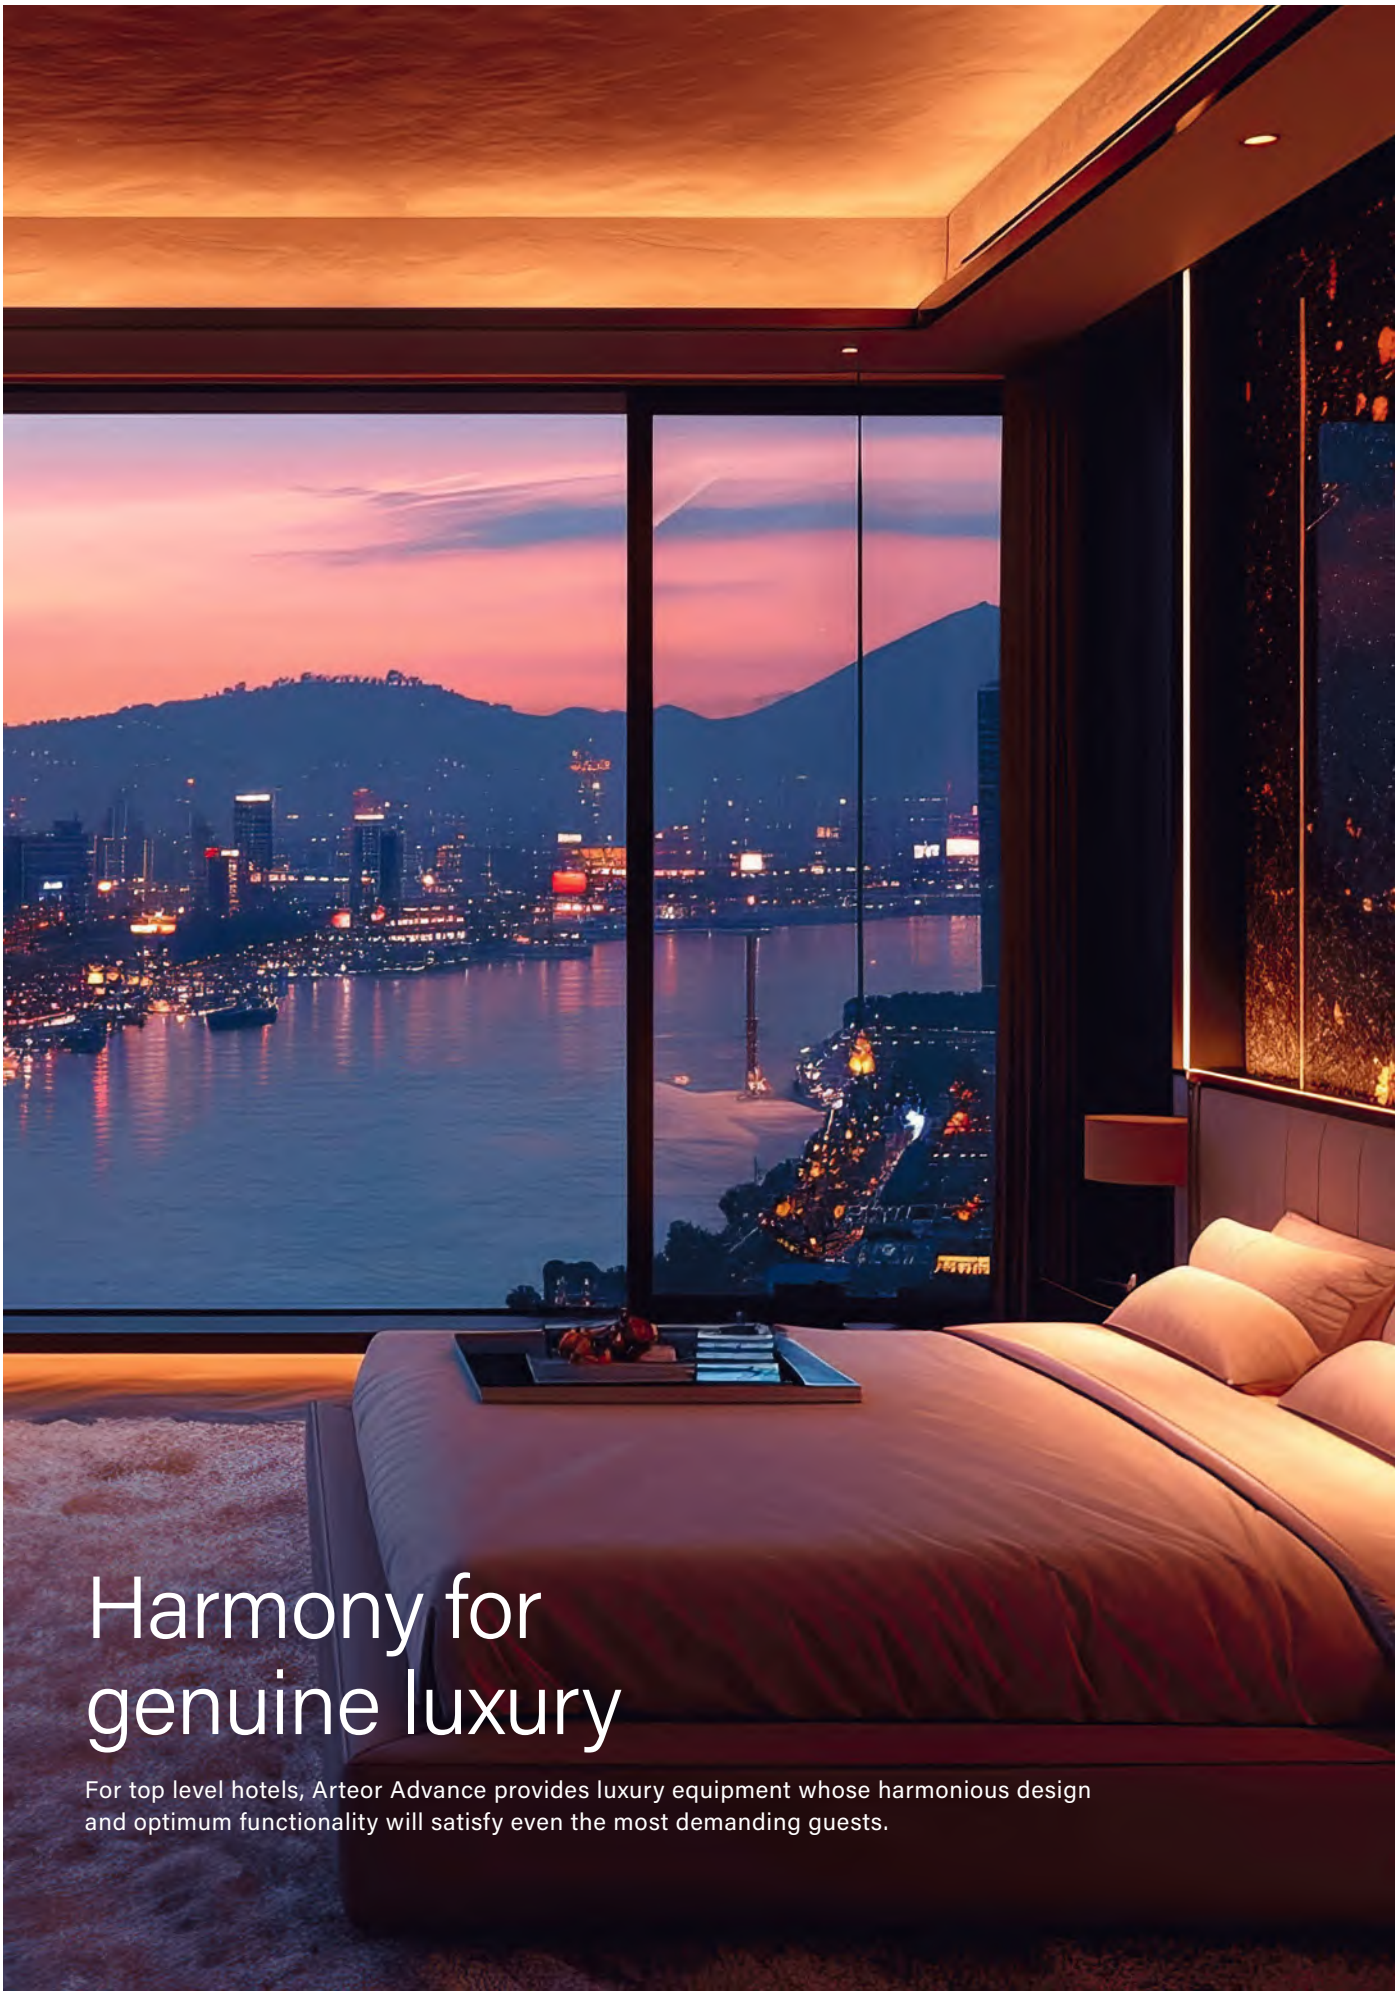


Harmony for genuine luxury

For top level hotels, Arteor Advance provides luxury equipment whose harmonious design and optimum functionality will satisfy even the most demanding guests.

UX for Upscale Hotels

A Bus-based solution with elegant, intuitive touchplates for hotels with the highest standards. It can be integrated easily into third-party building management systems thanks to its open protocol.

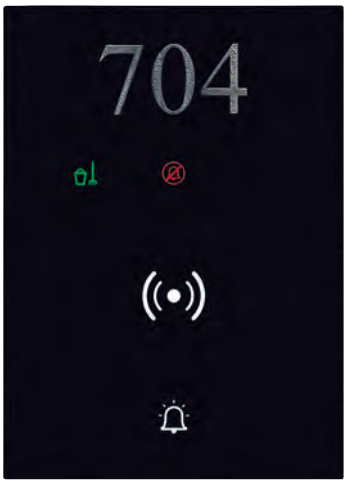

External reader:
Allows to open the door with the hotel card and provides a bell function for visitors.



Bedside panel
A convenient way of triggering complex scenarios for a wide range of situations.



6-Gang Touch Plate
Can be configured on an individual basis.

Harmony of technology and design

The Bus-based UX for Upscale Hotel controls can be integrated harmoniously into the Arteor Advance range. This enables you to create a customised guest experience at the highest visual and technical level.



Bus dimming control



"Do not Disturb / Make Up room" control indicator

Individual design to match the hotel's style

The system provides some interesting personalisation options, as colours or icons can be customised, as well as integration of the hotel logo. The online configurator available at **www.uxforhotels.legrand.com** provides further options for customised configuration.





For further information please check out our dedicated UX for Upscale Hotels brochure.

Better design for KNX experts



KNX is a widely used option whenever sophisticated automation is required for luxury villas and tertiary buildings. Blending technological performance with style, Arteor Advance KNX enables system integrators to realise complex automation projects with a spectacular design.

Arteor Advance KNX solutions offer full interoperability with all third-party applications and systems. It will thus be possible to create advanced solutions for the intelligent management of comfort and energy saving functions in hotels, hospitals, tertiary and luxury residential environments.



Multifunction control

KNX certified control device for perfect interoperability between Arteor Advance and third-party KNX products. Enabling management of up to 4 functions, it is configurable with ETS software and editable at any time. Arteor Advance key covers will add a touch of elegance to the control unit.





Lighting control

For ON/OFF and dimming control of standard and multicolour lamps.





Shutter control


For control of shutters and awnings. Raise/lower/stop function and memorisation of favourite position.





Temperature control

Setting temperature, fan speed and control modes for any kind of HVAC: ON-OFF valves, ON-OFF and 0-10V floor control units or VRV/VRF systems

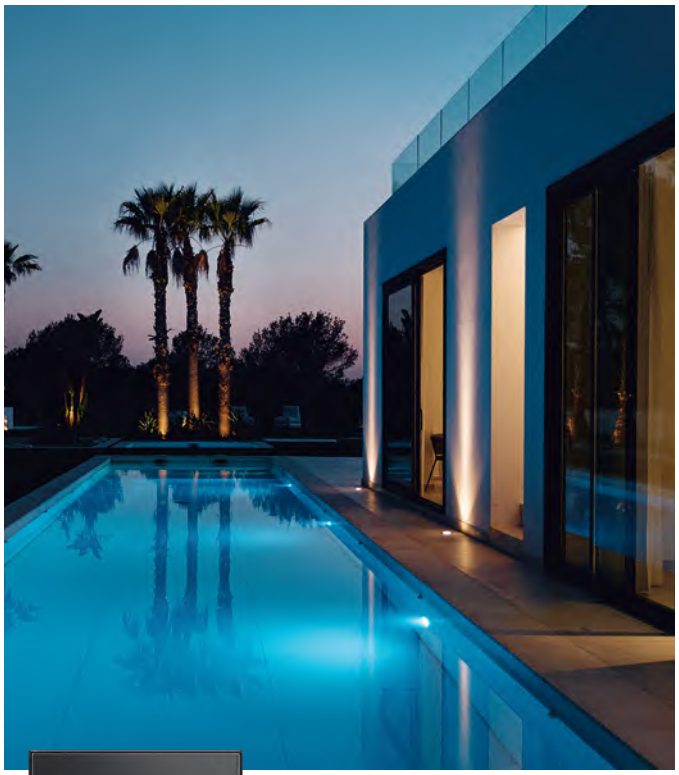



Scenes

Just one touch for setting lights, shutters and temperature to create comfort scenes and to save energy.

Open for everything: Arteor™ Advance and KNX

The KNX solutions from the Arteor Advance range can be integrated into an active general building management system. Not only for an optimum control of lighting, shutters, temperature and scenes. System integrators are also free to complete their projects with products from different manufacturers for security functions or heating and ventilation. It is also possible to display energy consumption or to be alerted when a fault occurs.

Touch Screen

Full KNX control on 15 pages including energy metering value display, timed functions, scene group function and logic functions.





Controller

Modular multifunction controller for On/Off control of lighting, shutters and HVAC with the same device. Designed for centralized installation with maximum flexibility.






Presence Sensors

For advanced automation functions required in any “green“ building. More energy efficiency through programmed lighting maintenance and scenario triggering dependent on presence / absence, natural light level or time.





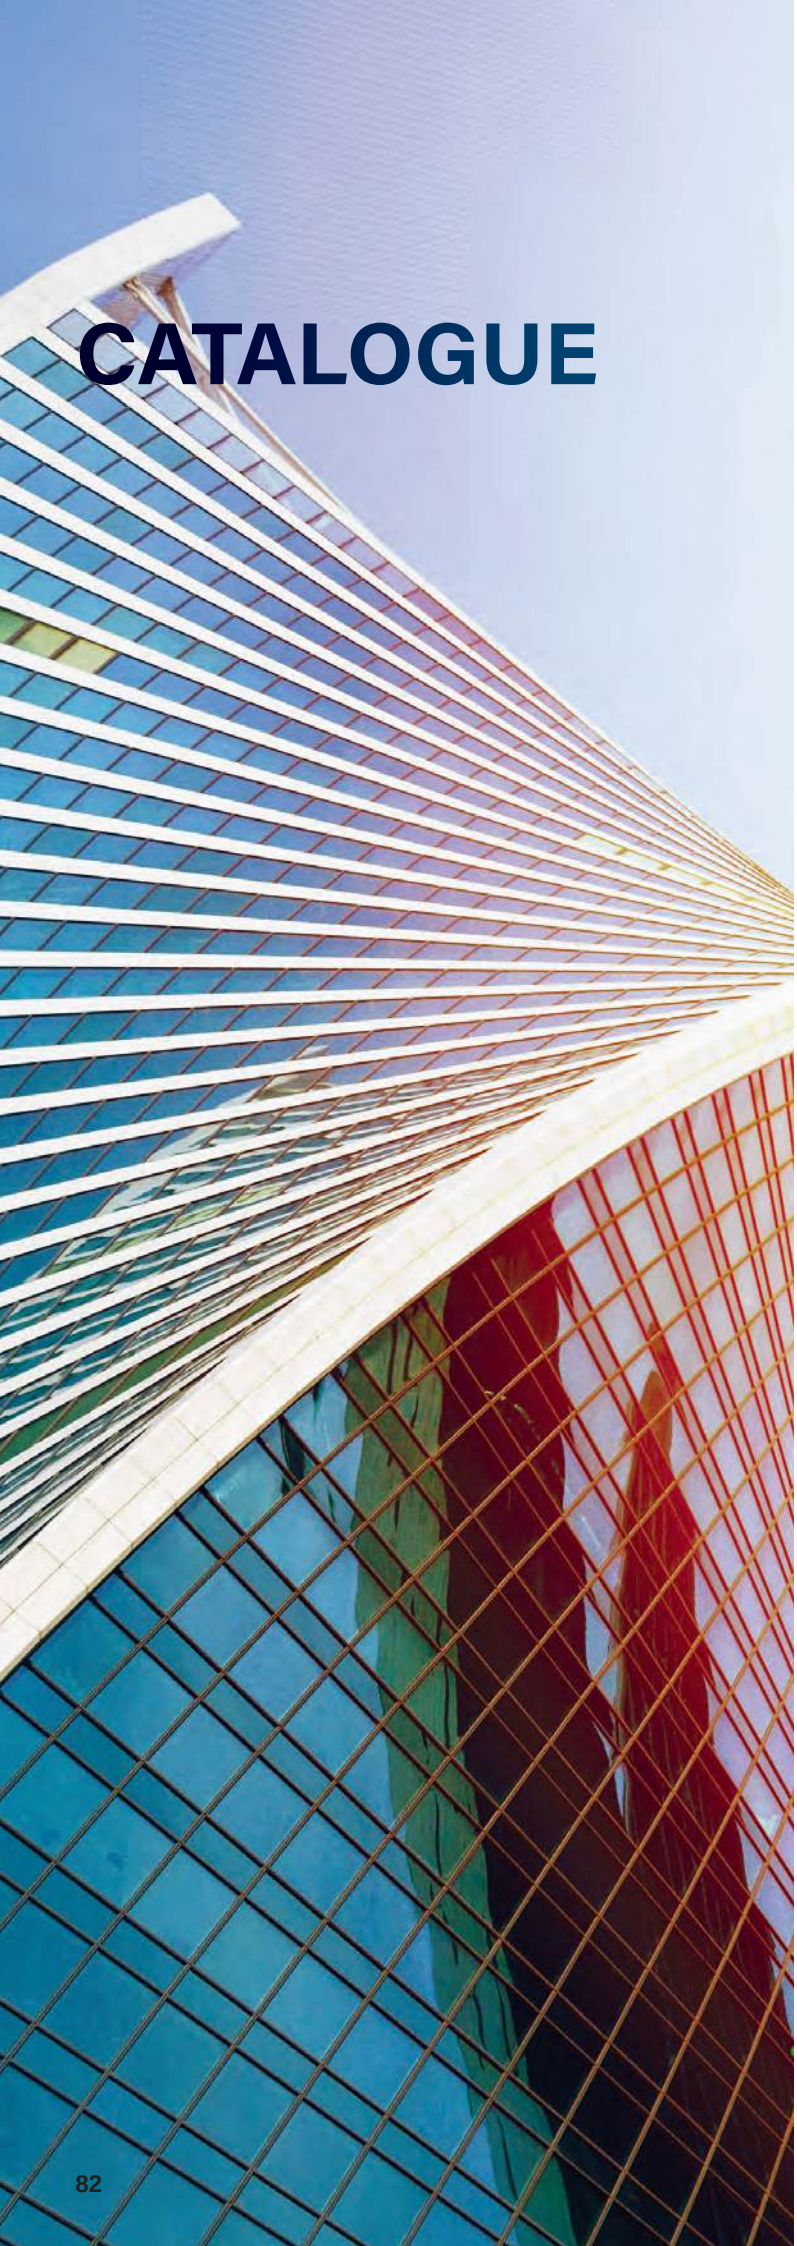

CATALOGUE

Arteor™ Advance



P. 85
Mechanical switches and push-buttons



P. 96
British standard socket outlets and British standard socket outlets with USB chargers



P. 109
Ancillary mechanisms and blanking cover plates

Arteor™ Advance with Netatmo International



P. 125
Smart gateway and light switches



P. 131
Smart wireless light switches, motion sensor and fan controller

Arteor™ Advance with Netatmo British standard



P. 149
Smart gateway and light switches



P. 154
Smart wireless light switches

MyHOME



P. 163
SCS Bus system management

KNX



P. 171
KNX manual control units, KNX thermoregulation

Hotel Equipment



P. 180
Bus, equipment for reception, guest rooms and infrastructure


P. 88
Contactless switches, motion sensors and dimmers


P. 92
Visual indication, heating, ventilation



P. 94
Curtain, roller blind controls, RCBO, emergency stop and lighting control


P. 95
Double pole switches, cooker control unit


P. 97
Multistandard socket outlets with USB chargers


P. 98
International socket outlets, USB chargers, wireless power chargers


P. 102
Telephone, television, RJ 45, data, audio and video sockets


P. 108
International support frames


P. 110
Mounting supports, special plates and mounting boxes


P. 111
Hotel equipment


P. 116
Plate selection charts


P. 126
Smart light switches with dimmer option and multicolour switches



P. 128
Smart fan controller, Smart curtain/roller blind switches


P. 129
Smart socket outlets and cable outlet


P. 130
Smart wireless switches for multicolour lighting


P. 133
Smart wireless curtain/roller blind switches


P. 134
Smart wireless scene switches


P. 137
International support frames and blank modules


P. 138
Plate selection charts


P. 150
Smart light switches with dimmer option


P. 151
Smart curtain/roller blind switches


P. 152
Smart socket outlets and cable outlet


P. 153
Smart wireless switches for multicolour lighting


P. 155
Smart wireless motion sensor and switch ON/OFF module


P. 155
Smart wireless curtain/roller blind switches


P. 156
Smart wireless scene switches


P. 158
Plate selection charts


P. 164
BUS flush-mounting control mechanisms and key cover selection charts


P. 166
BUS modular equipment for lighting control, automation and shutter control


P. 168
BUS energy management, sensor and temperature control


P. 170
BUS common accessories


P. 172
BUS key cover selection charts


P. 173
KNX sensors


P. 176
KNX modular controllers


P. 178
KNX building automation


P. 182
UX for Upscale Hotel


P. 184
UXOne touch controls, actuators and accessories



P. 185
Smart wireless batteryless accessories for UXOne rooms


P. 186
UXOne radio controls and room monitoring

CATALOGUE NUMBERS

New and easier

Arteor Advance reference codification introduces meaning for more clarity and more intuitive usage.

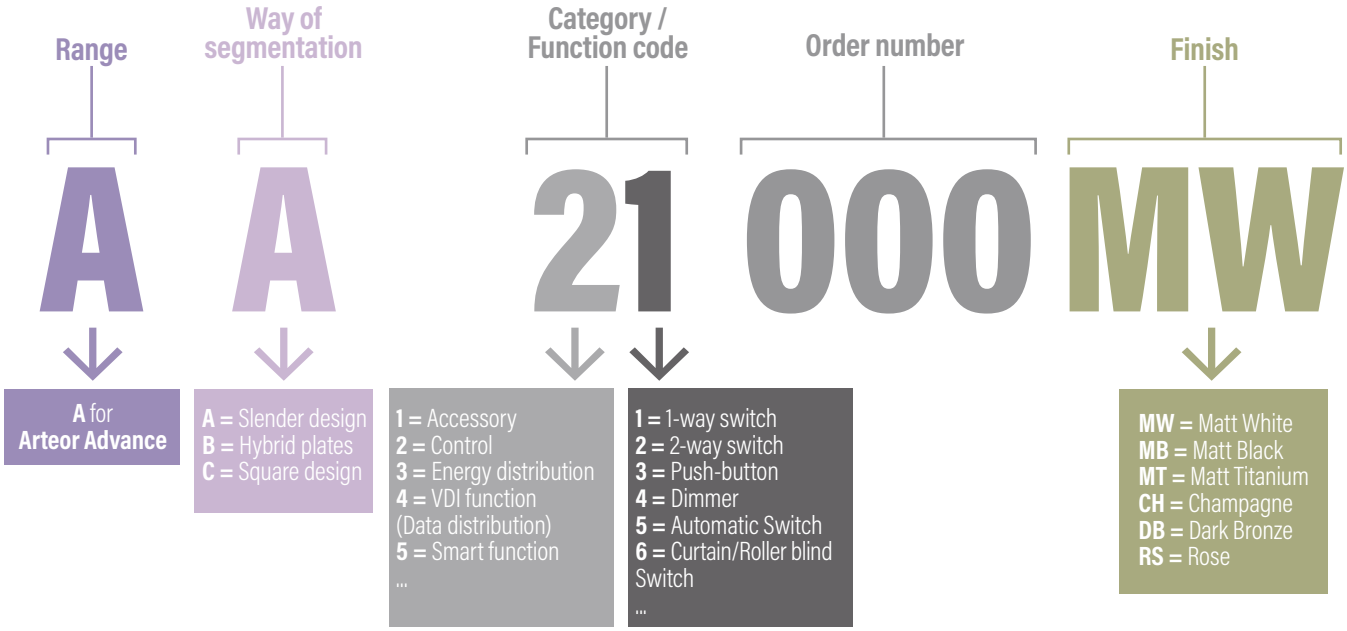

Cat. Numbers logic

DESIGN CODIFICATION

AC = Square Design



AC21101MB

AA = Slender Design



AA21101MB

FINISH CODIFICATION

MW = Matt White

AC21103**MW**

MB = Matt Black



AC21103**MB**

MT = Matt Titanium



AC21103**MT**

CH = Champagne



AC21103**CH**

DB = Dark Bronze



AC21103**DB**

RS = Rose



AC21103**RS**

Arteor™ Advance

mechanical switches


AA21101MW


AC21103MB


AC22103MT


AA22103MT


AC22111MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Switches 16 AX - 250 V~

1-way switch - 1 module

Pack	Square	Slender
10	AC21101MW	AA21101MW
10	AC21101MB	AA21101MB
10	AC21101MT	AA21101MT
10	AC21116	-
10	AC21101CH	AA21101CH
10	AC21101DB	AA21101DB
10	AC21101RS	AA21101RS



○ Matt White
● Matt Black
● Matt Titanium
● Red
● Champagne
● Dark Bronze
● Rose

1-way switch - 2 modules


Pack	Square
10	AC21103MW
10	AC21103MB
10	AC21103MT
10	AC21103CH
10	AC21103DB
10	AC21103RS



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2-way switch - 1 module

Pack	Square	Slender
10	AC22101MW	AA22101MW
10	AC22101MB	AA22101MB
10	AC22101MT	AA22101MT
10	AC22101CH	AA22101CH
10	AC22101DB	AA22101DB
10	AC22101RS	AA22101RS



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2-way switch - 2 modules

Pack	Square
10	AC22109MW
10	AC22109MB
10	AC22109MT
10	AC22109CH
10	AC22109DB
10	AC22109RS



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

Switches 16 AX - 250 V~ (continued)

2-way switch with indicator or locator - 1 module

To be equipped with LED (p. 85)

Pack	Square	Slender
10	AC22103MW	AA22103MW
10	AC22103MB	AA22103MB
10	AC22103MT	AA22103MT
10	AC22103CH	
10	AC22103DB	
10	AC22103RS	



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2-way switch with indicator or locator - 2 modules

To be equipped with LED (p. 85)

Pack	Square
5	AC22111MW
5	AC22111MB
5	AC22111MT
5	AC22111CH
5	AC22111DB
5	AC22111RS



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

Intermediate switch - 1 module

Pack	Square	Slender
5	AC20108MW	AA20108MW
5	AC20108MB	AA20108MB
5	AC20108MT	AA20108MT
5	AC20108CH	AA20108CH
5	AC20108DB	AA20108DB
5	AC20108RS	AA20108RS



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

Support frames and plates, **p. 108 and 116 to 123**




Red catalogue numbers: New products

Arteor™ Advance

mechanical switches (continued)


AA21107MB


AA22108MT


AC21312MW


AA21109MW


AC21110MT

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Switches 20 AX - 250 V~

1-way switch - 1 module

Pack	Square	Slender
10	AC21107MW	AA21107MW
10	AC21107MB	AA21107MB
10	AC21107MT	AA21107MT
10	AC21107CH	
10	AC21107DB	
10	AC21107RS	




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way switch - 2 modules

Pack	Square
10	AC21112MW
10	AC21112MB
10	AC21112MT
10	AC21112CH
10	AC21112DB
10	AC21112RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way switch with indicator - 1 module

LED supplied

Pack	Square	Slender
20	AC21108MW	AA21108MW[2]
20	AC21108MB	AA21108MB[2]
20	AC21108MT	AA21108MT[2]




○ Matt White
● Matt Black
○ Matt Titanium

2-way switch - 1 module

Pack		
10	AC22106MW	AA22106MW
10	AC22106MB	AA22106MB
10	AC22106MT	AA22106MT
10	AC22106CH	
10	AC22106DB	
10	AC22106RS	




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way switch with indicator - 1 module

To be equipped with LED (p. 86)

Pack		
10	AC22108MW	AA22108MW
10	AC22108MB[1]	AA22108MB
10	AC22108MT[1]	AA22108MT
10	AC22108CH	
10	AC22108DB[1]	
10	AC22108RS[1]	




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way switch with indicator - 2 modules

To be equipped with LED (p. 86)

Pack	Square
10	AC22113MW
5	AC22113MB
5	AC22113MT
10	AC22113CH
5	AC22113DB
5	AC22113RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way switch - 3-gang - 2 modules

Pack	Square
10	AC21312MW
10	AC21312MB
10	AC21312MT
10	AC21312CH
10	AC21312DB
10	AC21312RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1: Pack 5
2: Pack 10

Switches 20 AX - 250 V~ (continued)

2 x 2- way switch + 1-way switch - 3-gang - 2 modules

Pack	Square
10	AC29101MW
10	AC29101MB
10	AC29101MT
10	AC29101CH
10	AC29101DB
10	AC29101RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way double pole switch with "0 / I" marking - 1 module

Pack	Square	Slender
5	AC21109MW	AA21109MW
5	AC21109MB	AA21109MB
5	AC21109MT	AA21109MT
5	AC21109CH	
5	AC21109DB	
5	AC21109RS	




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way double pole switch with indicator with "0 / I" marking - 1 module

LED supplied

Pack	Square	Slender
5	AC21110MW	AA21110MW
5	AC21110MB	AA21110MB
5	AC21110MT	AA21110MT
5	AC21110CH	AA21110CH
5	AC21110DB	AA21110DB
5	AC21110RS	AA21110RS




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way double pole switch - 2 modules

Pack	Square
10	AC21111MW
10	AC21111MB
10	AC21111MT
10	AC21111CH
10	AC21111DB
10	AC21111RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way double pole switch with indicator

LED supplied - 2 modules

Pack	Square
10	AC21113MW
10	AC21113MB
10	AC21113MT
10	AC21113CH
10	AC21113DB
10	AC21113RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

1-way double pole switch with indicator and "WATER HEATER" "0 / I" marking

LED supplied - 2 modules

Pack	Square
10	AC20105MW
10	AC20105MB
10	AC20105MT
10	AC20105CH
10	AC20105DB
10	AC20105RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way double pole switch 2 modules

Pack	
10	AC22115MW
10	AC22115MB
10	AC22115MT
10	AC22115CH
10	AC22115DB
10	AC22115RS



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

Red catalogue numbers: New products

Arteor™ Advance

push-buttons


AA23101MB


AA23102MW


AC23103MW


AC23112MB


AA23108MT

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Push-buttons 10 A - 250 V~

1-way push-button - 1 module




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

Pack	Square	Slender
10	AC23101MW	AA23101MW
10	AC23101MB	AA23101MB
10	AC23101MT	AA23101MT
10	AC23101CH	AA23101CH
10	AC23101DB	AA23101DB
10	AC23101RS	AA23101RS

1-way push-button - 2 modules



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

Pack	Square
10	AC23113MW
10	AC23113MB
10	AC23113MT
10	AC23113CH
10	AC23113DB
10	AC23113RS

1-way push-button with bell symbol - 1 module




○ Matt White
● Matt Black
○ Matt Titanium

Pack	Square	Slender
5	AC23102MW	AA23102MW[1]
5	AC23102MB	AA23102MB[1]
5	AC23102MT	AA23102MT[1]

1-way push-button with bell symbol - 2 modules



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

Pack	Square
5	AC23111MW
5	AC23111MB
5	AC23111MT
5	AC23111CH
5	AC23111DB
5	AC23111RS

1-way push-button with bell symbol with locator - 1 module

LED supplied




○ Matt White
● Matt Black
○ Matt Titanium

Pack	Square	Slender
5	AC23103MW	AA23103MW
5	AC23103MB	AA23103MB
5	AC23103MT	AA23103MT

1-way push-button with locator - 1 module

LED supplied



○ Matt White
● Matt Black
○ Matt Titanium



○ Matt White
● Matt Black
○ Matt Titanium

Pack	Square
20	AC23107MW
20	AC23107MB
20	AC23107MT

Pack	Slender
5	AA23107MW
5	AA23107MB
5	AA23107MT

1-way push-button with bell symbol with locator - 2 modules

LED supplied



○ Matt White
● Matt Black
○ Matt Titanium

Pack	Square
10	AC23112MW
10	AC23112MB
10	AC23112MT

1: Pack 10

Pack	Square	Slender
10	AC23108MW	AA23108MW
5	AC23108MB[1]	AA23108MB
5	AC23108MT[1]	AA23108MT
5	AC23108CH[1]	
5	AC23108DB[1]	
5	AC23108RS[1]	

Pack	Square
10	AC23116MW
5	AC23116MB
5	AC23116MT

Pack	Square	Slender
10	AC23109MW	AA23109MW
10	AC23109MB	AA23109MB
10	AC23109MT	AA23109MT
10	AC23109CH	
10	AC23109DB	
10	AC23109RS	

Pack	Square
10	AC23114MW
5	AC23114MB
5	AC23114MT
10	AC23114CH
5	AC23114DB
5	AC23114RS

Pack	
10	AC23117MW
10	AC23117MB
10	AC23117MT

Push buttons 10 A - 250 V~ (continued)

2-way push-button - 1 module




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way push-button - 2 modules



○ Matt White
● Matt Black
○ Matt Titanium

2-way push-button with locator - 1 module

LED supplied (p. 85)




○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way push-button with locator with bell symbol - 2 modules

LED supplied



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
○ Rose

2-way push-button with label-holder - 2 modules

LED supplied



○ Matt White
● Matt Black
○ Matt Titanium

1: Pack 5/10



AC28101MW



AC28102MB

Support frame and plate selection charts **p. 108, 116**
Load selection charts **p. 85**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Contactless switch for lighting

Allows to control light sources by simply passing the hand in front of the switch
Detection distance 6 cm
LED indicator light, activated by default (can be switched off)
Mechanism depth 20 mm, compatible with all types of flush-mounting boxes
2 possibilities of cabling:
• With neutral, 3 wires
Accepted power by lamp type:
- LEDs and CFL lamps: 200 W LED
- Incandescent and halogen lamps: 200 W
- LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 200 VA
• Without neutral, 2 wires
Accepted power by lamp type:
- LEDs and CFL lamps: 5 to 200 W LED
- Incandescent and halogen lamps: 5 to 200 W
- LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 5 to 200 VA
• 4 modes available:
- 1-way switch mode: wiring with or without neutral
- 2-way switch mode: wiring with neutral mandatory
- Master/Slave mode: wiring with neutral mandatory, 3 slaves max.
- Push-button mode: wiring with neutral mandatory, for controlling relays or a "with Netatmo" micromodule
2 modules

Pack	Cat.Nos	
	Square	
1	AC28101MW	○ Matt White
1	AC28101MB	● Matt Black
1	AC28101MT	● Matt Titanium



Contactless switch for doors, electric and electromagnetic door locks

Allows to control door opening by simply passing the hand in front of the switch
Detection distance adjustable from 10 cm (default setting) to 30 cm
LED indicator light, activated by default (can be switched off)
Mechanism depth 25 mm, compatible with all types of flush-mounting boxes
Power supply 12 - 24 - 48 V⎓
Available modes :
Steady mode/pulse mode (default mode)
- NC/NO mode (default mode)
2 modules

Pack	Cat.Nos	
	Square	
1	AC28102MW	○ White
1	AC28102MB	● Matt Black
1	AC28102MT	● Matt Titanium



Arteor™ Advance

motion sensors


AC25102MB


AC25103MW


0 401 49

Support frame and plate selection charts **p. 108, 116**
Load selection charts **p. 85**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Motion sensors

Pack	Cat.Nos	
		Compatible with any type of lamp IR detection, detection field 170° Detection range 8 m Time delay setting from 5 s to 30 min Light level threshold setting from 5 to 1275 lux 4 levels of sensitivity setting Installation in box min. depth 30 mm 2 modules
		Motion sensor, 3 wires, with Neutral Accepted power by lamp type: - LEDs and CFL lamps: 0 to 500 W LED - Halogen and incandescent: 0 to 2000 W - LEDs, CFLs, halogen, fluorescent tube with ferromagnetic or electronic transformer: 0 to 1000 VA Possibility to install up to 10 sensors in parallel Additional remote manual control possible with push-button, 10 max. Master/Slave function available (10 slaves max. for 1 master) Standby consumption: < 0.015 W
	Square	
1	AC25102MW	○ Matt White
1	AC25102MB	● Matt Black
1	AC25102MT	● Matt Titanium
		Motion sensor, 2 wires, without Neutral Accepted power by lamp type: - LEDs and CFL lamps: 2 to 100 W LED - Halogen and incandescent: 2 to 150 W - LEDs, CFLs, halogen, fluorescent tube with ferromagnetic or electronic transformer : 2 to 150 VA If several sensors are installed on the same circuit, the minimum load changes: refer to the technical sheet Possibility to install up to 3 sensors in parallel Additional remote manual control possible with push-button, 10 max. Can be associated with a modular time-lag switch Cat.Nos 4 126 02 or 0 047 04 Accepted power by lamp type will be power of the time-lag switch used Standby consumption: < 0.01 W
1	AC25103MW	○ Matt White
1	AC25103MB	● Matt Black
1	AC25103MT	● Matt Titanium

Active power bleeder

Pack	Cat.Nos	
1	0 401 49	Makes 2-wire electronic lighting control units without neutral compatible with all commercially-available loads (LED, compact fluorescent, ELV halogen with ferromagnetic or electronic ballast, 230 V halogen, fluorescent tube, incandescent) Consumption 0.4 W


AA24107MW


AC24106MT


AC24101MT


AC24105MT

Support frame and plate selection charts **p. 108, 116**
Load selection charts **p. 85**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Rotary dimmer switch, with or without Neutral

Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
For local or remote ON/OFF or dimming control of lighting
Can be controlled by one or several mechanical push-buttons
Locator and indicator functions can be activated
Compatible with all loads:
-Dimmable LED and CFL lamps: 200W LED
-Incandescent and halogen lamps: 200W
-ELV halogen and CFL lamps with separate ballast: 200VA
Standby consumption < 0.7W
2 modules

Pack	Square	Slender
1	AC24107MW	AA24107MW
1	AC24107MB	AA24107MB
1	AC24107MT	AA24107MT

Square Slender

○ Matt White
● Matt Black
● Matt Titanium

Touch dimmer with Neutral 5-300 W - 75 W LED

Conform to BS EN 60669-2-1
For all types of lamps :
- Dimmable LED lamps with integrated electronic ballast (10 lamps max.): max 75 W (Leading); max. 200 W (Trailing)
- Incandescent and halogen lamps: max 300 W
- ELV halogen and CFL lamps with separate ferromagnetic ballast: max 200 VA
- ELV halogen and CFL lamps with separate electronic ballast: max 200 VA
- Dimmable CFL lamps with integrated electronic ballast: max 75 W
Standby consumption: < 0.15 W
2 modules

Pack	Square
1	AC24106MW
1	AC24106MB
1	AC24106MT

○ Matt White
● Matt Black
● Matt Titanium

Push-button dimmers for all dimmable loads

Can be associated with one or several push-buttons without neon, for On/Off and dimming control
Memory level functtion : Lights come on again at the same lighting level as before they were last switched off
Lower and upper thresholds setting
Indicator/locator function
Depth 35 mm

Without neutral, 2 wires

For ON/OFF and dimming control of all types of lamps:
- Dimmable LED and CFL lamps: 3 to 125 W LED (10 lamps max.)
- Halogen and incandescent 230 V~ : 3 to 125 W
- LEDs, CFLs, halogen lamps, fluorescent tubes with or electronic transformer: 3 to 125 VA
Standby consumption < 0.3 W
2 modules

Pack	Square
1	AC24104MW
1	AC24104MB
1	AC24104MT

○ Matt White
● Matt Black
● Matt Titanium

With neutral, 3 wires

For ON/OFF and dimming control of all types of lamps:
- Dimmable LED and CFL lamps: 0 to 150 W LED (15 lamps max.)
- Halogen and incandescent 230 V~ : 0 to 150 W
- LEDs, CFLs, halogen lamps, fluorescent tubes with ferromagnetic or electronic transformer: 0 to 150 VA
Standby consumption < 0.7 W
1 module

Pack	
1	AC24101MW
1	AC24101MB
1	AC24101MT

○ Matt White
● Matt Black
● Matt Titanium

Dimmers 1-10 V

Push-button dimmer for ballasts 1-10 V
2 modules

Pack	Square
1	AC24105MW
1	AC24105MB
1	AC24105MT
1	AC24105CH
1	AC24105DB
1	AC24105RS

○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

Red catalogue numbers: New products

Arteor™ Advance

load selection charts

Contactless switch

	Cat.Nos	Wiring	Compensator	LEDs and CFLs with integrated electronic ballast *Max. power (W)*		Halogen/Incandescent lamps *Max. power (W)*		Halogen and fluorescent tube with ferromagnetic tranformer *Max. power (VA)*	
				110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Contactless switch for lighting	**AC28101MW** **AC28101MB** **AC28101MT**	With or without neutral	No	100 VA	200 VA	100	200	100	200

Motion sensor

	Cat.Nos	Wiring	Compensator	LEDs and CFLs with integrated electronic ballast *Max. power (W)*		Halogen/Incandescent lamps *Max. power (W)*		Halogen and fluorescent tube with ferromagnetic tranformer *Max. power (VA)*	
				110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Motion sensor	**AC25102MW** **AC25102MB** **AC25102MT**	With neutral	No	250 VA	500 VA	1 000	2 000	500	1 000
	AC25103MW **AC25103MB** **AC25103MT**	Without neutral	No	50 VA	100 VA	75	150	75	150


Dimmers

	Cat.Nos	Wiring	Compensator	Dimmable LEDs and CFLs with integrated electronic ballast *Max. power (W)*		Halogen/Incandescent lamps *Max. power (W)*		Halogen and fluorescent tube with ferromagnetic tranformer *Max. power (VA)*	
				110 V~	230 V~	110 V~	230 V~	110 V~	230 V~
Push-button dimmer 2 modules	**AC24101MW** **AC24101MB** **AC24101MT**	With neutral	No	75	150	75	150	75	150
	AC24104MW **AC24104MB** **AC24104MT**	Without neutral	Recommended	60	125	60	125	60	125
Rotary dimmer 2 modules	**AC/AA24107MW**	With neutral	No	100	200	100	200	100	200
	AC/AA24107MB **AC/AA24107MT**	Without neutral	Recommended						
Touch dimmer 5-300 W 2 modules	**AC24106MW** **AC24106MB** **AC24106MT**	With neutral	No	-	200	150	300	150	300
Dimmer 1-10 V 2 modules	**AC24105MW** **AC24105MB** **AC24105MT**	0-10 V	No	300	600	300	600	300	600
	AC24105CH **AC24105DB** **AC24105RS**								


AC650MB


AC25101MT


AC652MW


Lamp used as a torch


AC655

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Skirting lights

For installation close to obstacles
2 modules

Standard

With LED 230 V~ - 0.2 or 1 W

Pack	Cat.Nos	
	Square	
1	AC650MW	○ Matt White
1	AC650MB	● Matt Black
1	AC650MT	● Matt Titanium
1	AC650CH	● Champagne
1	AC650DB	● Dark Bronze
1	AC650RS	● Rose

With motion detector 100-240 V~

With IR detection cell and LED
When a person passes, the mechanism detects the presence and lights the obstacle
The function is equipped with an audible signal that can be disabled

1	AC25101MW	○ Matt White
1	AC25101MB	● Matt Black
1	AC25101MT	● Matt Titanium

Self-contained plug-in lights

230 V~ power supply
In the event of a mains failure, the lamp lights up automatically
When removed from its socket, the lamp lights up automatically and can be used as a torch (with O/I button)
Lamp can be removed simply by pushing
Standby power: 24 hrs in use

1	AC652MW	○ Matt White

Illuminated lighting unit

1 module

230 V~ - 0.6 W
Supplied with 3 coloured labels (red/green/blue)

10	Square AC655	

2 modules

230 V~ - 1.6 W
4 LED colours (white/red/green/blue) depending on the wiring

5	AC656	

Overdoor lighting units

230 V~ - 1.6 W
Supplied with diffusers and LED
2 modules

Pack	Cat.Nos	
1	Square AC654	

Lamps

For locator switch

10	A186	LED 230 V - blue
10	A187	LED 230 V - warm white - High intensity recommended for Matt Black and Matt Titanium finish switches
10	A188	LED 230 V - warm white- Low intensity recommended for Matt White finish switches

For indicator switch

10	A180	LED 230 V - red
10	A181	LED 24 V - red
10	A182	LED 12 V - red

Reading lights

Fitted with maintenance-free LEDs
LED colours: 3000 K (neutral white)
230 V~ power supply - energy class A
Screw terminals
For installation in the bedhead
Offers directional lighting
Equipped with a flexible cable so the head can swivel
Built-in dimmer
Consumption 3.3 W
Luminous flux 110 lumen (equivalent to 15 W incandescent)
Service life 40000 hours
For installation in box depth 40 mm min.
2 modules

	Square	
1	AC657MW	○ Matt White
1	AC657MB	● Matt Black

Arteor™ Advance

heating, ventilation


AC670MT


0 674 59

AA674MW


AA667MB

Support frame and plate selection charts **p. 108, 116**

Thermostats

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)
2 modules

Electronic room thermostat
Control knob with index and adjustable segments for min. and max. settings
Adjustable range from 5 °C to 30 °C (+/- 0.5 °C)
Power supply: 230 V~ - 50/60 Hz
One potential free changeover contact output
Suitable for controlling heated ceilings and underfloor heating
- LV use breaking capacity:
8 A - 250 V~ - resistive inductive circuit
2 A - 250 V~ - inductive circuit
- ELV use breaking capacity:
12 to 48 V~ - 12 to 24 V⎓, from 1 mA min. to 500 mA max.



Pack	Cat.Nos	
	Square	
1	AC670MW	○ Matt White
1	AC670MB	● Matt Black
1	AC670MT	● Matt Titanium

Thermostat for electric floor heating
With one potential free N/O contact and LED
16 A - 230 V~
Adjustable range from 7 °C to 40 °C



Pack	Cat.Nos	
1	AC671MW	○ Matt White
1	AC671MB	● Matt Black
1	AC671MT	● Matt Titanium
1	AC671CH	● Champagne
1	AC671DB	● Dark Bronze
1	AC671RS	● Rose

Thermostat compatible Guest Room Management System



Pack	Cat.Nos	
1	0 674 59	Flush-mounted thermostat with backlit display

Can be used to control the temperature of an individual zone, with or without a temperature central unit
Features a temperature probe and an input for the connection of a contact line (e.g. window contact)
Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used
Possibility of automatic operation (summer/winter), with compatible systems

Room temperature control

Allows you to adjust and monitor the temperature in the rooms precisely and accurately with a tactile touch
Can control an Air Conditioning System
Power supply: 250V~ 50/60Hz
Ajustable temperature range from 5°C to 35°C
Temperature accuracy: +/- 1°C
Load type: magnetic valve/motor operated valve with 1A capacity
Temperature sensor: internal NTC
Power consumption: < 1W



Pack	Cat.Nos	
	Slender	
1	AA674MW	○ Matt White
1	AA674MB	● Matt Black
1	AA674MT	● Matt Titanium

Fan controllers

2 modules

AC speed control - 4 positions
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)




Pack	Cat.Nos	
	Square	
1	AC668MW	○ Matt White
1	AC668MB	● Matt Black
1	AC668MT	● Matt Titanium

Rotary fan controller - 70 W
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)



Pack	Cat.Nos	
	Slender	
5	AA667MW	○ Matt White
5	AA667MB	● Matt Black
5	AA667MT	● Matt Titanium

5-steps fan controller - 100 W
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)



Pack	Cat.Nos	
	Square	
5	AC662MW	○ Matt White
5	AC662MB	● Matt Black
5	AC662MT	● Matt Titanium

1-gang 3-pole fan controller - 10 A
Mechanisms supplied with covers, to be equipped with plates (p. 116-123)



Pack	Cat.Nos	
10	AC666MW	○ Matt White
10	AC666MB	● Matt Black
10	AC666MT	● Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance

curtain, roller blind controls


AA26101MW


AC26104MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos		
			Curtain switches
			1 module
			Curtain switch centre off
	Square	Slender	
5	AC26101MW	AA26101MW	○ Matt White
5	AC26101MB	AA26101MB	● Matt Black
5	AC26101MT	AA26101MT	◌ Matt Titanium
5	AC26101CH		◌ Champagne
5	AC26101DB		● Dark Bronze
5	AC26101RS		● Rose
			Curtain switch centre retract
			Push-button action
	Square		
5	AC26102MW		○ Matt White
5	AC26102MB		● Matt Black
5	AC26102MT		◌ Matt Titanium
5	AC26102CH		◌ Champagne
5	AC26102DB		● Dark Bronze
5	AC26102RS		● Rose
			Electric roller blind controllers- 250 V~
			For control via automatic box (N/O mechanism)
			Double push-button - 10 A
			2 modules
	Square		
10	AC26106MW		○ Matt White
10	AC26106MB		● Matt Black
10	AC26106MT		◌ Matt Titanium
10	AC26106CH		◌ Champagne
10	AC26106DB		● Dark Bronze
10	AC26106RS		● Rose
			For direct control of a motor (mechanism with fixed positions)
			Double push-button - 10 A - 2 modules
	Square	Slender	
10	AC26104MW	AA26104MW[1]	○ Matt White
10	AC26104MB	AA26104MB[1]	● Matt Black
10	AC26104MT	AA26104MT[1]	◌ Matt Titanium
10	AC26104CH		◌ Champagne
10	AC26104DB		● Dark Bronze
10	AC26104RS		● Rose

1: Pack 5

Arteor™ Advance

RCBO, emergency stop and lighting control


AC631


AC20110MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos	
		RCBO - 16 A - 230 V~
		Single pole + Neutral - 30 mA
		Used to protect people (premises with a conductive floor, presence of water, etc...) against direct contact with live parts or leakages to earth
		With test button
		2 modules
	Square	
1	AC624MW	○ Matt White
		Emergency stop mushroom head push-buttons 10 A - 250 V~
		N/O + N/C
		2 modules
		With key
	Square	Unlock with RONIS key N° 601
1	AC631	◐ Yellow/red
		1/4 turn
		1/4 turn unlocking
1	AC630	◐ Yellow/red
		Time delay switch
		Interference suppression conforming to standard EN 55022
		For timer control of a circuit with the following loads:
		- 1000 W incandescent and halogen 230 V~
		- 2300 W resistive (heating)
		- 400 VA fluorescent and ELV halogen
		Adjustable from 25 s to 15 min
		It is possible to install a number of time delay switches in parallel on the same circuit
		With integrated LED
		2-wire installation in box min. depth 40 mm
		2 modules
1	AC20110MW	○ Matt White
1	AC20110MB	● Matt Black
1	AC20110MT	◌ Matt Titanium
		Single pole latching relay 10 A - 250 V~
		Used to bring functions with low breaking capacity close to the application
		- Resistive: 3000 W
		- Incandescent: 1800 W
		- LV halogen: 1800 W
		- Fluorescent: 400 VA
		- Motors (roller blind type): 530 W
		2 modules
1	AC6000MW	○ Matt White
1	AC6000MB	● Matt Black
1	AC6000MT	◌ Matt Titanium


Red catalogue numbers: New products

Arteor™ Advance

double pole switches, cooker control unit



AC20106MW



AA730MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with plates (p. 116-123)
Support frame not needed

Double pole switches 32 A - 250 V~

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)
Conform to IEC 60669-1
Captive terminal screws
For flush mounting box min. 35mm deep
Use 2 modules plate

Double pole switch with indicator - 2 modules




Pack	Cat.Nos	
10	AC20101MW	○ Matt White
10	AC20101MB	● Matt Black
10	AC20101MT	● Matt Titanium

Double pole switches 40 A - 250 V~

Conform to EN 60669-1
Captive terminal screws
For flush-mounting box min. 48 mm deep
Use US plate 4" x 4" - 2 modules

Double pole switch



Pack	Cat.Nos	
5	AC20103MW	○ Matt White
5	AC20103MB	● Matt Black
5	AC20103MT	● Matt Titanium

Double pole switch with indicator




Pack	Cat.Nos	
5	AC20106MW	○ Matt White
5	AC20106MB	● Matt Black
5	AC20106MT	● Matt Titanium

Double pole switches 45 A - 250 V~


Conform to EN 60669-1
Captive terminal screws
For flush-mounting box min. 48 mm deep

Double pole switch with indicator - 1-gang
Use BS plate 2 modules



Pack	Cat.Nos	
5	AC20104MW	○ Matt White
5	AC20104MB	● Matt Black
5	AC20104MT	● Matt Titanium
5	AC20104CH	● Champagne
5	AC20104DB	● Dark Bronze
5	AC20104RS	● Rose

Double pole switch with indicator - 2-gang
Use BS plate 3 modules




Pack	Cat.Nos	
5	AC20102MW	○ Matt White
5	AC20102MB	● Matt Black
5	AC20102MT	● Matt Titanium
5	AC20102CH	● Champagne
5	AC20102DB	● Dark Bronze
5	AC20102RS	● Rose

Cooker control unit 250 V~

Conform to BS 4177
45 A double pole switch + 13 A double pole switched socket outlet
Use special plate Cat.No AC1109

Double pole switch with indicator



Pack	Cat.Nos	
5	AA730MW	○ Matt White
5	AA730MB	● Matt Black
5	AA730MT	● Matt Titanium

Arteor™ Advance

British standard socket outlets, fused connection units


AA3201MB


AA3140MW


AA3141MW


AA3208MT

Plate selection charts **p. 116-123**

Mechanisms supplied with covers, to be equipped with special plates (p. 116-123)
Support frame not needed

Single pole socket outlets 13 A - 250 V~

Shuttered for child safety
ASTA licence
Conform to BS 1363 Part 2
Use special plates

Pack	Cat.Nos	
		2P+E switched - 1-gang
10	AA3201MW	○ Matt White
10	AA3201MB	● Matt Black
10	AA3201MT	● Matt Titanium
10	AA3201CH	● Champagne
10	AA3201DB	● Dark Bronze
10	AA3201RS	● Rose
		2P+E unswitched - 1-gang
10	AA3140MW	○ Matt White
10	AA3140MB	● Matt Black
10	AA3140MT	● Matt Titanium
10	AA3140CH	● Champagne
10	AA3140DB	● Dark Bronze
10	AA3140RS	● Rose
		2P+E switched with indicator - 1-gang
10	AA3203MW	○ Matt White
10	AA3203MB	● Matt Black
10	AA3203MT	● Matt Titanium
10	AA3203CH	● Champagne
10	AA3203DB	● Dark Bronze
10	AA3203RS	● Rose
		2P+E switched - 2-gang
5	AA3207MW	○ Matt White
5	AA3207MB	● Matt Black
5	AA3207MT	● Matt Titanium
5	AA3207CH	● Champagne
5	AA3207DB	● Dark Bronze
5	AA3207RS	● Rose
		2P+E unswitched - 2-gang
5	AA3141MW	○ Matt White
5	AA3141MB	● Matt Black
5	AA3141MT	● Matt Titanium
5	AA3141CH	● Champagne
5	AA3141DB	● Dark Bronze
5	AA3141RS	● Rose
		2P+E switched with indicator - 2-gang
5	AA3209MW	○ Matt White
5	AA3209MB	● Matt Black
5	AA3209MT	● Matt Titanium
5	AA3209CH	● Champagne
5	AA3209DB	● Dark Bronze
5	AA3209RS	● Rose

Double pole socket outlets 13 A - 250 V~

Shuttered for child safety
ASTA licence
Conform to BS 1363 Part 2
Use special plates

Pack	Cat.Nos	
		2P+E switched - 1-gang
5	AA3202MW	○ Matt White
5	AA3202MB	● Matt Black
5	AA3202MT	● Matt Titanium
5	AA3202CH	● Champagne
5	AA3202DB	● Dark Bronze
5	AA3202RS	● Rose
		2P+E switched - 2-gang
5	AA3208MW	○ Matt White
5	AA3208MB	● Matt Black
5	AA3208MT	● Matt Titanium
5	AA3208CH	● Champagne
5	AA3208DB	● Dark Bronze
5	AA3208RS	● Rose

Double pole socket outlets 5 A - 250 V~

Shuttered for child safety
Conform to BS 546
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos	
	Square	**2P+E switched - 1-gang - 3 modules**
5	AA3204MW	○ Matt White
5	AA3204MB	● Matt Black
5	AA3204MT	● Matt Titanium
5	AA3204CH	● Champagne
5	AA3204DB	● Dark Bronze
5	AA3204RS	● Rose

Fused connection units

Double pole fused 13 A (fuse supplied)
Flex outlet knockout and cord grip
Captive fuse carrier (padlockable)
Captive terminal screws
Conform to BS 1363: part 4

Pack	Cat.Nos	
	Square	**Switched**
5	AC621MW	○ Matt White
5	AC621MB	● Matt Black
5	AC621MT	● Matt Titanium
5	AC621CH	● Champagne
5	AC621DB	● Dark Bronze
5	AC621RS	● Rose
		Switched with indicator
5	AC622MW	○ Matt White
5	AC622MB	● Matt Black
5	AC622MT	● Matt Titanium
5	AC622CH	● Champagne
5	AC622DB	● Dark Bronze
5	AC622RS	● Rose
		Unswitched
5	AC620MW	○ Matt White
5	AC620MB	● Matt Black
5	AC620MT	● Matt Titanium
5	AC620CH	● Champagne
5	AC620DB	● Dark Bronze
5	AC620RS	● Rose

Red catalogue numbers: New products

Arteor™ Advance

British standard socket outlets with USB chargers



AA3328MT



AA3320MB

Mechanisms supplied with covers, to be equipped with special plates (p. 116-123)
Support frame not needed

Pack	Cat.Nos	British standard socket outlets 13 A - 250 V~ with USB charger
		Conform to BS 1363-2 and IEC 60884-2-3 Consumption in passive mode < 0.07 W Fast charge feature: USB Type-C Power Delivery
	AUGUST 2025	**1-gang single pole switched with USB Type-A + Type-C 20 W**
1	AA3328MW	○ Matt White
1	AA3328MB	● Matt Black
1	AA3328MT	● Matt Titanium
1	AA3328CH	● Champagne
1	AA3328DB	● Dark Bronze
1	AA3328RS	● Rose
		1-gang double pole switched with USB Type-A + Type-C 20 W
1	AA3330MW	○ Matt White
1	AA3330MB	● Matt Black
1	AA3330MT	● Matt Titanium
1	AA3330CH	● Champagne
1	AA3330DB	● Dark Bronze
1	AA3330RS	● Rose
	AUGUST 2025	**1-gang single pole switched with USB Type-C +Type-C 24 W**
1	AA3329MW	○ Matt White
1	AA3329MB	● Matt Black
1	AA3329MT	● Matt Titanium
1	AA3329CH	● Champagne
1	AA3329DB	● Dark Bronze
1	AA3329RS	● Rose
	AUGUST 2025	**1-gang double pole switched with USB Type-C +Type-C 24 W**
1	AA3331MW	○ Matt White
1	AA3331MB	● Matt Black
1	AA3331MT	● Matt Titanium
1	AA3331CH	● Champagne
1	AA3331DB	● Dark Bronze
1	AA3331RS	● Rose
		2-gang single pole switched with USB Type-A + Type-C 27 W
1	AA3320MW	○ Matt White
1	AA3320MB	● Matt Black
1	AA3320MT	● Matt Titanium
1	AA3320CH	● Champagne
1	AA3320DB	● Dark Bronze
1	AA3320RS	● Rose
		2-gang double pole switched with USB Type-A + Type-C 27 W
5	AA3321MW	○ Matt White
5	AA3321MB	● Matt Black
5	AA3321MT	● Matt Titanium
5	AA3321CH	● Champagne
5	AA3321DB	● Dark Bronze
5	AA3321RS	● Rose

Arteor™ Advance

multistandard socket outlets with USB chargers



AA3342MB



AA3360MW

Mechanisms supplied with covers, to be equipped with special plates (p. 116-123)
Support frame not needed

Pack	Cat.Nos	Multistandard switched socket outlets 16 A - 250 V~ / 15 A - 127 V~ with USB charger
		Consumption in passive mode < 0.07 W Fast charge feature: USB Type-C Power Delivery
	AUGUST 2025	**2P+E - 1-gang with USB Type-A + Type-C 20 W**
1	AA3347MW	○ Matt White
1	AA3347MB	● Matt Black
1	AA3347MT	● Matt Titanium
1	AA3347CH	● Champagne
1	AA3347DB	● Dark Bronze
1	AA3347RS	● Rose
	AUGUST 2025	**2P+E - 1-gang with USB Type-C + Type-C 24 W**
1	AA3348MW	○ Matt White
1	AA3348MB	● Matt Black
1	AA3348MT	● Matt Titanium
1	AA3348CH	● Champagne
1	AA3348DB	● Dark Bronze
1	AA3348RS	● Rose
		2P+E - 2-gang with USB Type-A + Type-C 27 W
1	AA3342MW	○ Matt White
1	AA3342MB	● Matt Black
1	AA3342MT	● Matt Titanium
1	AA3342CH	● Champagne
1	AA3342DB	● Dark Bronze
1	AA3342RS	● Rose
		Euro-US type socket with USB charger
		Consumption in passive mode < 0.07 W
		Euro-US 2 x 2P+E - 1-gang with USB Type-A + Type-C 15 W - 3 modules
1	AA3360MW	○ Matt White
1	AA3360MB	● Matt Black
1	AA3360MT	● Matt Titanium

Red catalogue numbers: New products


AC3142MW


AC3205MW


AC3174MW


AC3122MT


AC3160MB

Support frame and plate selection charts **p. 108, 116**


Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

British standard socket outlets

Pack	Cat.Nos
	Square
5	AC3206MW
5	AC3206MB
5	AC3206MT
5	AC3206CH
5	AC3206DB
5	AC3206RS
10	AC3142MW
10	AC3142MB
10	AC3142MT
10	AC3142CH
10	AC3142DB
10	AC3142RS
5	AC3205MW
5	AC3205MB
5	AC3205MT
5	AC3205CH
5	AC3205DB
5	AC3205RS
5	AC3210
10	AC3143MW
10	AC3143MB
10	AC3143MT
10	AC3143CH
10	AC3143DB
10	AC3143RS

Shuttered for child safety

2P+E switched - 15 A
Conform to BS 546
3 modules




○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2P+E unswitched - 13 A
Conform to BS 1363 Part 2
ASTA licence
2 modules



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2P+E single pole switched - 13 A
Conform to BS 1363 Part 2
ASTA licence
3 modules



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose
● Red

2P+E - 5 A
Conform to BS 546
2 modules



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

Multistandard socket outlets

Pack	Cat.Nos
	Square
10	AC3174MW
10	AC3174MB
10	AC3174MT
10	AC3174CH
10	AC3174DB
10	AC3174RS
5	AC3231MW
5	AC3231MB
5	AC3231MT
5	AC3231CH
5	AC3231DB
5	AC3231RS

Shuttered for child safety

2P+E unswitched - 2 modules



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

2P+E switched - 3 modules



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose

German standard socket outlets 16 A

Pack	Cat.Nos
	Square
10	AC3122MW
10	AC3122MB
10	AC3122MT
10	AC3122DB
10	AC3122CH
10	AC3122RS
10	AC3125
10	AC3124
10	AC3123
10	AC3129MW
10	AC3129MB
10	AC3129MT

2 modules

2P+E shuttered for child safety



○ Matt White
● Matt Black
● Matt Titanium
● Champagne
● Dark Bronze
● Rose
● Dedicated green
● Dedicated orange

2P+E tamperproof, shuttered for child safety
Used to identify a mains circuit (e.g. inverter) and avoid connection of unnecessary equipment which may cause interference on the circuit
To be used with tamperproof insert Cat.No 0 502 99



● Red tamperproof

2P+E with cover



○ Matt White
● Matt Black
● Matt Titanium

Tamperproof insert for Cat.No AC3123

Pack	Cat.Nos
10	0 502 99



Tamperproof insert for socket
Fits directly into the plug

Euro-US type socket outlets - 15 A - 127 V / 16 A - 250 V

Pack	Cat.Nos
	Square
10	AC3160MW
10	AC3160MB
10	AC3160MT
10	AC3161MW
10	AC3161MB
10	AC3161MT
5	AC3162MW
5	AC3162MB
5	AC3162MT

2P with shutters - 1 module



○ Matt White
● Matt Black
● Matt Titanium

2P+E with shutters - 2 modules



○ Matt White
● Matt Black
● Matt Titanium

2 x 2P+E with shutters - 3 modules



○ Matt White
● Matt Black
● Matt Titanium

Arteor™ Advance

international socket outlets (continued)


AC3173MT


AC3169MB


AC3176MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

American type socket outlets 15 A - 127 V

Pack	Cat.Nos		
	Square	**2P - 1 module**	
10	AC3171MW		○ Matt White
10	AC3171MB		● Matt Black
10	AC3171MT		● Matt Titanium
		2P+E - 2 modules	
10	AC3172MW		○ Matt White
10	AC3172MB		● Matt Black
10	AC3172MT		● Matt Titanium
		2 x 2P+E - 3 modules	
5	AC3173MW		○ Matt White
5	AC3173MB		● Matt Black
5	AC3173MT		● Matt Titanium

Italian type socket outlets

Pack	Cat.Nos		
		1 module	
	Square	**2P+E shuttered for child safety - 10/16 A**	
10	AC3169MW		○ Matt White
10	AC3169MB		● Matt Black
10	AC3169MT		● Matt Titanium

Swiss type socket outlets

Pack	Cat.Nos		
	Square	**T 13, 10 A, 250 V, 2P+E with shutters**	
		Automatic terminals, 2 modules	
10	AC3170MW		○ Matt White
10	AC3170MB		● Matt Black
10	AC3170MT		● Matt Titanium

Arteor™ Advance

USB chargers


AC3411MT


AC3412MW



AA3406MB



AC3401MW



AC3407MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)
Conform to IEC 62684
Connection with 2x2.5 mm² screw terminals

USB Type-A chargers

Consumption in passive mode <0.1 W
For charging of smartphones, tablets and powerbanks

Single USB sockets - 1 x Type-A - 15 W
1 module - compact format for space gain



Pack	Cat.Nos	Square
10	AC3408MW	○ Matt White
10	AC3408MB	● Matt Black
10	AC3408MT	● Matt Titanium

Double USB sockets - 2 x Type-A - 15 W
For charging up to two portable devices
1 module - compact format for space gain



10	AC3410MW	○ Matt White
10	AC3410MB	● Matt Black
10	AC3410MT	● Matt Titanium

USB Type-A + USB Type-C chargers

For charging of up to two portable devices (smartphones, tablets, powerbanks)

Double USB sockets - Type-A + Type-C - 15 W
Consumption in passive mode <0.1 W
1 module - compact format for space gain



Pack	Cat.Nos	Square
10	AC3411MW	○ Matt White
10	AC3411MB	● Matt Black
10	AC3411MT	● Matt Titanium
10	AC3411CH	● Champagne
10	AC3411DB	● Dark Bronze
10	AC3411RS	● Rose

USB Type-C chargers

For charging of up to two portable devices (smartphones, tablets, powerbanks)

Double USB sockets - 2 x Type-C - 15 W
Consumption in passive mode <0.1 W
1 module - compact format for space gain



Pack	Cat.Nos	Square
10	AC3412MW	○ Matt White
10	AC3412MB	● Matt Black
10	AC3412MT	● Matt Titanium
10	AC3412CH	● Champagne
10	AC3412DB	● Dark Bronze
10	AC3412RS	● Rose

USB Type-C chargers - Fast charge

Fast charge feature: Power Delivery

Single USB sockets - 1 x Type-C 20 W
For fast charging of smartphones, tablets, powerbanks
Consumption in passive mode <0.05 W
1 module - compact format for space gain



Pack	Cat.Nos	Square
10	AC3409MW	○ Matt White
10	AC3409MB	● Matt Black
10	AC3409MT	● Matt Titanium
10	AC3409CH	● Champagne
10	AC3409DB	● Dark Bronze
10	AC3409RS	● Rose

Double USB sockets - 2 x Type-C 30 W
For charging of laptops, smartphones, tablets, powerbanks
Consumption in passive mode <0.1 W
2 modules




Pack	Square	Slender	
1	AC3406MW	AA3406MW	○ Matt White
1	AC3406MB	AA3406MB	● Matt Black
1	AC3406MT	AA3406MT	● Matt Titanium
1	AC3406CH	AA3406CH	● Champagne
1	AC3406DB	AA3406DB	● Dark Bronze
1	AC3406RS	AA3406RS	● Rose

Single USB sockets - 1 x Type-C 45 W
For charging of laptops, smartphones, tablets, powerbanks
Consumption in passive mode <0.1 W
2 modules



Pack	Square	Slender	
1	AC3401MW	AA3401MW	○ Matt White
1	AC3401MB	AA3401MB	● Matt Black
1	AC3401MT	AA3401MT	● Matt Titanium
1	AC3401CH		● Champagne
1	AC3401DB		● Dark Bronze
1	AC3401RS		● Rose

Double USB sockets - 2 x Type-C 63 W
For charging of laptops, smartphones, tablets, powerbanks
Consumption in passive mode <0.1 W
Automatic terminals
3 modules



Pack	Cat.Nos	Square
1	AC3407MW	○ Matt White
1	AC3407MB	● Matt Black
1	AC3407MT	● Matt Titanium
1	AC3407CH	● Champagne
1	AC3407DB	● Dark Bronze
1	AC3407RS	● Rose

Red catalogue numbers: New products

Arteor™ Advance

wireless power chargers



0 776 40L supplied with sticker

Wireless power chargers for fast charging of a smartphone with a QI receiver
Power supply standby mode consumption < 0.07 %
Conform to the WPC (Wireless Power Consortium) QI standard: certified for professional QI 1.2.3 projects
Conform to EN 62479 standard (EMF emissions)
Conform to ICNIRP specifications (health protection)
Do not interfere with other wireless signals (Zigbee, TNT, GSM, 4G, etc)

Pack	Cat.Nos	Ready to install wireless charger
		Specially designed for mounting horizontally on furniture in passageways or transit areas, offices or kitchen surfaces, etc. IP 44 - IK08 - Class II SELV Equipped with an 8 cm² induction antenna for fast smartphone charging 80 mm diameter cut-out using hole saw Cat.No 0 885 08, inlaid diameter 85 mm, extra-slim with thickness < 1.5 mm Charger locks under furniture with a butterfly nut WPC Qi certified Aluminium colour
1	0 776 40L	**Complete kit with 1 charger for furniture Ø80 (plug)** 1 x 15 W charger with 1 x 25 W power supply Power supply equipped with a 2.5 m cord 2P European plug (also available with plug conforming to US, BS, Australia or China standards; please consult us) Supplied with the following accessories: - 2.5 m RJ 45 cable - Adhesive bases and cable ties for attaching cables - Sticker Ø85-110 for identification purposes in public areas
1	0 776 45L	**Complete kit with 4 chargers for furniture Ø80 (cable)** 4 x 15 W chargers with 1 x 100 W power supply Power supply 2 x 2.5 mm² for cable connection Provides several power supplies on a single line Supplied with 4 x 1 m RJ 45 cables and associated accessories Charger wired in star or series connection Plug & Play
1	0 776 46L	**Complete kit with 4 chargers for furniture Ø80 (plug)** 4 x 15 W chargers with 1 x 100 W power supply Power supply equipped with a 2.5 m cord 2P European plug (also available with plug conforming to US, BS, Australia or China standards; please consult us) Supplied with 4 x 1 m RJ 45 cables and associated accessories Charger wired in star or series connection Plug & Play

Pack	Cat.Nos	Chargers for customer assembly
		15 W wireless chargers (IP 44, IK08) Single unit with power supply Cat.No 0 776 38L Multiple units with power supply/supplies Cat.No 0 776 39L Option to print a custom logo
1	0 776 42L	○ White
1	0 776 43L	● Black
1	0 776 41L	● Aluminium

Pack	Cat.Nos	Movable power supplies for wireless chargers
		25 W power supply
1	0 776 38L	With 2P plug and RJ 45 cable
		100 W power supply
1	0 776 39L	2 x 2.5 mm², tap-off possible Supplied with 4 x 1 m RJ 45 cables Charger wired in star or series connection Plug & Play

Arteor™ Advance

telephone sockets


AC421MW


AC425MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos	
		RJ 11 sockets
		Equipped with modular Jack connector with 1/4 turn terminal for fast connection (possible looping)
		RJ 11 - 1 module
	Square	4 contacts
10	AC421MW	○ Matt White
10	AC421MB	● Matt Black
10	AC421MT	● Matt Titanium
10	AC421CH	● Champagne
10	AC421DB	● Dark Bronze
10	AC421RS	● Rose
		RJ 11 - 2 modules
		4 contacts
10	AC425MW	○ Matt White
10	AC425MB	● Matt Black
10	AC425MT	● Matt Titanium
10	AC425CH	● Champagne
10	AC425DB	● Dark Bronze
10	AC425RS	● Rose
		Telephone sockets
		With IDC connection Conform to British Telecom specifications
	Square	**Single master - 2 modules**
10	AC427MW	○ Matt White
10	AC427MB	● Matt Black
10	AC427MT	● Matt Titanium
		Single secondary - 1 module
5	AC426MW	○ Matt White
5	AC426MB	● Matt Black
5	AC426MT	● Matt Titanium

Arteor™ Advance

television sockets



AC4106MT


AC4100MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

For DVB-T, Cablecast and satellite installation
UHD TV quality compatible
Class A shielded star socket LTE ready (4G protected)
Recommended coaxial cable: 17 VATCA
Star cabling (1 socket = 1 cable to antenna, splitter or multiswitch)
Visual check of the connection
Meets EN 50083-4 and EN 50083-2 European directives

Pack	Cat.Nos	
		Multi TV star sockets
		TV-R-SAT sockets
		DAB+ Low attenuation: 1.5 dB 2 modules
	Square	
10	AC4106MW	○ Matt White
10	AC4106MB	● Matt Black
10	AC4106MT	● Matt Titanium
10	AC4106CH	● Champagne
10	AC4106DB	● Dark Bronze
10	AC4106RS	● Rose
		TV-R-SAT-SAT sockets
		In1: TV-R-SAT1 / In2: SAT2 Low attenuation: 1.5 dB 2 modules
10	AC4108MW	○ Matt White
10	AC4108MB	● Matt Black
10	AC4108MT	● Matt Titanium
		Single TV star sockets
		Low attenuation 1dB 1 module
	Square	**TV 9.5 mm male sockets**
10	AC4103MW	○ Matt White
10	AC4103MB	● Matt Black
10	AC4103MT	● Matt Titanium
10	AC4103CH	● Champagne
10	AC4103DB	● Dark Bronze
10	AC4103RS	● Rose
		TV "F" type sockets
10	AC4100MW	○ Matt White
10	AC4100MB	● Matt Black
10	AC4100MT	● Matt Titanium
10	AC4100CH	● Champagne
10	AC4100DB	● Dark Bronze
10	AC4100RS	● Rose

Red catalogue numbers: New products


Arteor™ Advance

television sockets

Information about DAB+


Digital Audio Broadcasting is the radio equivalent of DTT, a global standard used all over the world.
- More radio stations available
- Better sound quality
- Digital data combined with the audio stream
- This socket has a reception range of radio DAB+ 87.5 - 240 MHz
- A link to a collective or individual aerial
- Digital quality

Roll-out in 2024

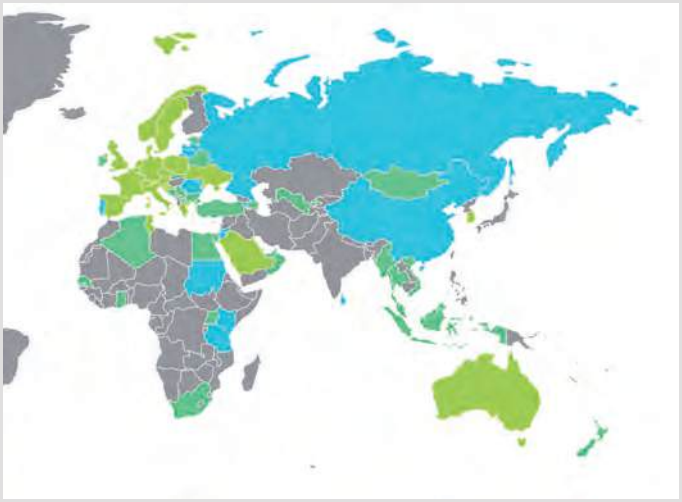


Source: WorldDAB
- Countries with regular services
- Countries with trials and/or regulation
- Countries with interest

High performance

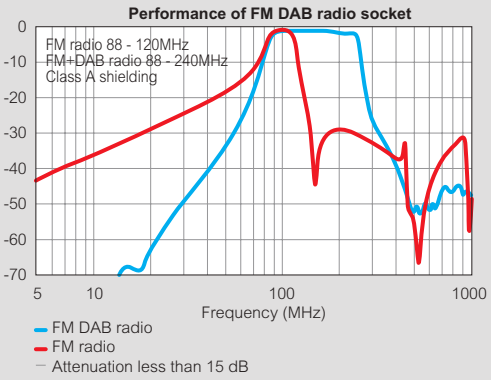


Return loss input

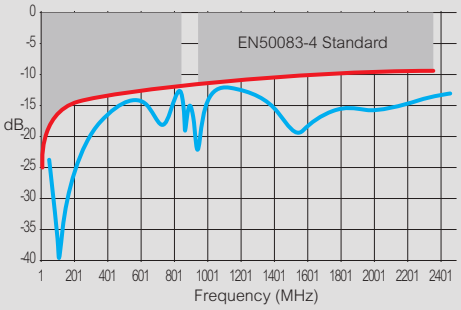


Coupling attenuation

IN→SAT

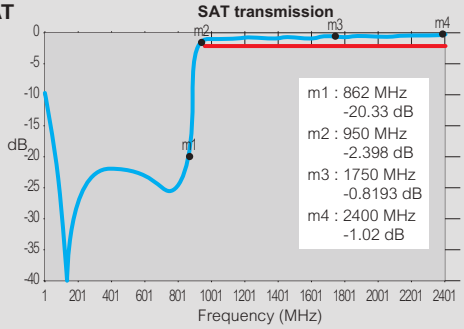

IN→TV

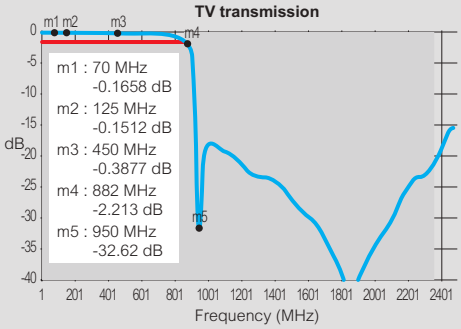


Certification


Class A sockets, protected with LTE block filter. LTE protection is needed to prevent interference from new signals used by smartphones (3G, 4G, 5G). These undesirable signals can cause picture freezing or breaking up, and distorted sound. Legrand uses the PKM laboratory for Class A certification of its sockets.

Requirements for TV corner

- Multi-gang wiring accessories
- TV attenuation < 1.5 dB
- 17 VATC coaxial cable
- Cat. 6 twisted pairs
- Multi-operator, terrestrial DTT, satellite, cable network and ISP, FM and DAB+ radio reception



- Internet connection

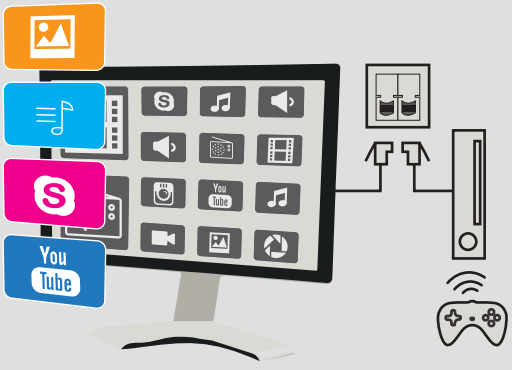

- Smart TV with interactive services
- Connected games console (for online gaming)

Arteor™ Advance

RJ 45 sockets


AC4305MW


AC4311MW


AC4312MB


AC4304MW

Support frame and plate selection charts **p. 108, 116**

Can be integrated in any support
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)
Equipped with connectors for quick toolless connection
Take single-core cables from AWG 22 up to AWG 26, and AWG 26 multicore cables
T568A and B marking with colour codes
Compliant with ISO/IEC 11 801, EN 50173 and ANSI/TIA 568 standards

Cat. 6A sockets

Pack	Cat.Nos	
	Square	**STP - 1 module** 360° metal shielding
10	AC4305MW	○ Matt White
10	AC4305MB	● Matt Black
10	AC4305MT	Matt Titanium
10	AC4305CH	Champagne
10	AC4305DB	Dark Bronze
10	AC4305RS	Rose
		STP - 2 modules 360° metal shielding
10	AC4311MW	○ Matt White
10	AC4311MB	● Matt Black
10	AC4311MT	Matt Titanium
		STP with controlled access - 2 modules Supplied with 2 keys for 5 sockets 360° metal shielding
5	AC4312MW	○ Matt White
5	AC4312MB	● Matt Black
5	AC4312MT	Matt Titanium
		UTP - 1 module
10	AC4306MW	○ Matt White
10	AC4306MB	● Matt Black
10	AC4306MT	Matt Titanium
10	AC4306CH	Champagne
10	AC4306DB	Dark Bronze
10	AC4306RS	Rose
		UTP - 2 modules
10	AC4313MW	○ Matt White
10	AC4313MB	● Matt Black
10	AC4313MT	Matt Titanium
		UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets
5	AC4314MW	○ Matt White
5	AC4314MB	● Matt Black
5	AC4314MT	Matt Titanium

Cat. 6 sockets

Pack	Cat.Nos	
	Square	**STP - 1 module** 360° metal shielding
10	AC4303MW	○ Matt White
10	AC4303MB	● Matt Black
10	AC4303MT	Matt Titanium
10	AC4303CH	Champagne
10	AC4303DB	Dark Bronze
10	AC4303RS	Rose
		STP - 2 modules 360° metal shielding
10	AC4308MW	○ Matt White
10	AC4308MB	● Matt Black
10	AC4308MT	Matt Titanium
		UTP - 1 module
10	AC4304MW	○ Matt White
10	AC4304MB	● Matt Black
10	AC4304MT	Matt Titanium
10	AC4304CH	Champagne
10	AC4304DB	Dark Bronze
10	AC4304RS	Rose
		UTP - 2 modules
10	AC4310MW	○ Matt White
10	AC4310MB	● Matt Black
10	AC4310MT	Matt Titanium
10	AC4310CH	Champagne
10	AC4310DB	Dark Bronze
10	AC4310RS	Rose
		UTP with controlled access - 2 modules Supplied with 2 keys for 5 sockets
5	AC4309MW	○ Matt White
5	AC4309MB	● Matt Black
5	AC4309MT	Matt Titanium

Cat. 5e sockets

Pack	Cat.Nos	
	Square	**UTP - 1 module**
10	AC4300MW	○ Matt White
10	AC4300MB	● Matt Black
10	AC4300MT	Matt Titanium
		UTP - 2 modules
10	AC4307MW	○ Matt White
10	AC4307MB	● Matt Black
10	AC4307MT	Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance

rear pluggable data sockets



AC4316MW



AC4315MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Rear pluggable RJ 45 sockets

For use with area distribution boxes system

Cat. 6_A - STP - 2 modules



Pack	Cat.Nos	
	Square	
10	AC4316MW	○ Matt White
10	AC4316MB	● Matt Black
10	AC4316MT	● Matt Titanium

Cat. 6 - UTP - 2 modules



Pack	Cat.Nos	
10	AC4315MW	○ Matt White
10	AC4315MB	● Matt Black
10	AC4315MT	● Matt Titanium

Arteor™ Advance

adaptors for data sockets



AC170MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Adaptors for Keystone data sockets

Equipped with transparent label-holder

Single connector - 2 modules



Pack	Cat.Nos	
	Square	
10	AC170MW	○ Matt White
10	AC170MB	● Matt Black
10	AC170MT	● Matt Titanium
10	AC170CH	● Champagne
10	AC170DB	● Dark Bronze
10	AC170RS	● Rose

Double connector - 2 modules



Pack	Cat.Nos	
10	AC171MW	○ Matt White
10	AC171MB	● Matt Black
10	AC171MT	● Matt Titanium
10	AC170CH	● Champagne
10	AC170DB	● Dark Bronze
10	AC170RS	● Rose

Adaptors for Systimax data sockets

Equipped with transparent label-holder

Single connector - 2 modules



Pack	Cat.Nos	
	Square	
10	AC173MW	○ Matt White
10	AC173MB	● Matt Black
10	AC173MT	● Matt Titanium
10	AC170CH	● Champagne
10	AC170DB	● Dark Bronze
10	AC170RS	● Rose

Double connector - 2 modules



Pack	Cat.Nos	
10	AC174MW	○ Matt White
10	AC174MB	● Matt Black
10	AC174MT	● Matt Titanium
10	AC170CH	● Champagne
10	AC170DB	● Dark Bronze
10	AC170RS	● Rose

Red catalogue numbers: New products

Arteor™ Advance

fibre optic sockets



AC4353MW



AC4351MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Fibre optic sockets

Equipped with a duplex feedthrough
To be used to connect two fibres (equipped with their connector)
Supplied with protection caps
Equipped with a transparent marker-holder
2 modules

Pack	Cat.Nos	
	Square	**2 x SC/APC push-pull connection socket**
1	AC4353MW	○ Matt White
		2 x ST bayonet connection (STII compatible) socket
1	AC4350MW	○ Matt White
		2 x SC push-pull connection socket
1	AC4351MW	○ Matt White
		2 x LC push-pull connection socket
1	AC4352MW	○ Matt White

Arteor™ Advance

USB data sockets



AC4362MW



AC4360MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

USB data sockets for data transfer

Used to bring connections closer to the user
For connecting USB devices (interactive white board, scanner-printer, external hard disk)

Preterminated - USB 2.0 - 1 module
Maximum length: 5 m
Recommended cable: USB A
Equipped with a 15 cm cord

Pack	Cat.Nos	
	Square	
1	AC4362MW	○ Matt White
1	AC4362MB	● Matt Black
1	AC4362MT	● Matt Titanium
1	AC4362CH	● Champagne
1	AC4362DB	● Dark Bronze
1	AC4362RS	● Rose

Connection via screw terminals - USB 2.0 1 module
Maximum length: 5 m
Recommended cable: USB A
Cross-section 1 mm²

1	AC4360MW	○ Matt White
1	AC4360MB	● Matt Black
1	AC4360MT	● Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance

audio and video sockets


AC4411MT


AC4412MW


AC4450MW


AC4400MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

HDMI type A sockets

Used to transmit high-definition digital audio/ video streams between a source (computer, soundbar, home cinema) and a compatible receiver (TV, videoprojector...)
Maximum distance between 2 sockets: 10m

Preterminated sockets HDMI 2.0 - 1 module
Equipped with cord, length 15 cm




Pack	Square	
1	AC4411MW	Matt White
1	AC4411MB	Matt Black
1	AC4411MT	Matt Titanium
1	AC4411CH	Champagne
1	AC4411DB	Dark Bronze
1	AC4411RS	Rose

Preterminated sockets HDMI 2.0 - 2 modules
Equipped with cord, length 15 cm



Pack		
1	AC4412MW	Matt White
1	AC4412MB	Matt Black
1	AC4412MW	Matt Titanium
1	AC4412CH	Champagne
1	AC4412DB	Dark Bronze
1	AC4412RS	Rose

HDMI extender



Used to connect remote HDMI terminals up to 60m
The kit comprises transmitter and receiver units as well as power supplies
The transmitter and receiver are linked by an RJ45/RJ45 cable (not supplied)
Compatible with 4K, 3D, EDID and HDCP
Including infrared control
Certified HDBaseT

Pack	Cat.Nos
1	0 517 38

HD15 sockets

Used to transmit analog video streams (VGA, XGA, UXGA depending on graphic card) between a source (computer) and a compatible receiver (LCD, video projector, TV, etc)

Preterminated sockets - 1 module
Equipped with cord, length 15 cm



Pack	Square	
1	AC4421MW	Matt White
1	AC4421MB	Matt Black
1	AC4421MT	Matt Titanium

Jack sockets 3.5 mm

3.5 mm Jack connectors can be used to create audio links

Preterminated sockets - 1 module
Equipped with cord, length 15 cm



Pack	Square	
1	AC4430MW	Matt White
1	AC4430MB	Matt Black
1	AC4430MT	Matt Titanium

Female 2 RCA sockets

Provide the stereo audio link for any peripheral device such as a DVD drive, camera, video recorder

Preterminated - 1 module
Equipped with a 15 cm cord



Pack	Square	
1	AC4440MW	Matt White
1	AC4440MB	Matt Black
1	AC4440MT	Matt Titanium

3-pole XLR sockets

Provide the stereo link for microphone, amplifier, mixing console, etc.
Recommended cable: 1 audio pair 0.14mm² to 0.5mm² shielded
Max. cable length: 50m (without amplifier)
2 modules

XLR female



Pack	Square	
1	AC4450MW	Matt White
1	AC4450MB	Matt Black
1	AC4450MT	Matt Titanium

XLR male



Pack		
1	AC4452MW	Matt White
1	AC4452MB	Matt Black
1	AC4452MT	Matt Titanium

Loudspeaker sockets

4 mm² terminals

1 module



Pack	Square	
10	AC4400MW	Matt White
10	AC4400MB	Matt Black
10	AC4400MT	Matt Titanium
10	AC4400CH	Champagne
10	AC4400DB	Dark Bronze
10	AC4400RS	Rose

2 modules



Pack		
10	AC4404MW	Matt White
10	AC4404MB	Matt Black
10	AC4404MT	Matt Titanium

Attenuators

100 V - 25 W
Allow loudspeaker line to adjust power to 25 W from a balanced 100 V
2 modules



Pack	Square	
1	AC4470MW	Matt White
1	AC4470MB	Matt Black
1	AC4470MT	Matt Titanium
1	AC4470CH	Champagne
1	AC4470DB	Dark Bronze
1	AC4470RS	Rose

Female BNC 75 sockets

Provide the composite video link for any peripheral device such as a DVD drive, camera, video recorder, etc
Connection on screw terminals - 1 module



Pack	Square	
1	AC4460MW	Matt White
1	AC4460MB	Matt Black
1	AC4460MT	Matt Titanium

Red catalogue numbers: New products


A1402






A1408


A1407

Plate selection charts **p. 116-123**

Support frames for BS type boxes 60.3 mm fixing centres

Screw mounting (screws supplied)

Pack	Cat.Nos	
		For 1-gang box
10	A1402	For 1 or 2 modules 
5	A1404	For 3 modules Horizontal and vertical 
		For 2-gang box
10	A1408	Rectangular - for 3 modules Horizontal and vertical 
10	A1409	Rectangular - for 2 x 2 modules 
		For 4"x4" boxes
10	A1410	For 2, 3 and 4 modules 
		For 6 modules
5	A1417	Horizontal mounting 
		For 8 modules
5	A1411	Horizontal mounting 



Support frames for US and Italian type boxes

Screw mounting

Pack	Cat.Nos	
		For 1-gang box
10	A1406	For 1 to 3 modules 

Support frames for Italian/French/German type boxes

Screw mounting

Pack	Cat.Nos	
10	A1405	4 modules 
5	A1407	6 modules 

Red catalogue numbers: New products

Arteor™ Advance

ancillary mechanisms

AC150MW



AA150MT


Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos		
	Square	Slender	
20	AC150MW	AA150MW	
20	AC150MB	AA150MB	
20	AC150MT	AA150MT	
20	AA150CH		
20	AA150DB		
20	AA150RS		
	Square		
10	AC153MW		
10	AC153MB		
10	AC153MT		
10	AC153CH		
10	AC153DB		
10	AC153RS		
10	Square AC350MW		
5	Square AC352MW		
10	Square AC351MW		
10	AC353MW		

Blank modules

1 module



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
● Rose

2 modules



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
● Rose

Cable junction


20 A cable outlet for junction - 2 modules



○ Matt White

Cable outlet

45 A cable outlet - BS 1-gang
Supplied with cover plate
For flush-mounting box min. 45 mm deep



○ Matt White

Cord outlets

1 module with Ø8 mm diameter



○ Matt White

2 modules



○ Matt White

Arteor™ Advance

blanking cover plates



AC1501MT

AC1502MW

Support frame and plate selection charts **p. 108, 116**

To be equipped with support frames (p. 108) and plates (p. 116-123)

Pack	Cat.Nos
	Square
5	AC1501MW
5	AC1501MB
5	AC1501MT
5	AC1501CH
5	AC1501DB
5	AC1501RS
5	AC1502MW
5	AC1502MB
5	AC1502MT

British standard blanking cover plates

For 1-gang box



○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
● Dark Bronze
● Rose

For 2-gang box



○ Matt White
● Matt Black
○ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance

mounting supports and special plates



A1401




5 751 90

Support frame and plate selection charts **p. 108, 116**
Only compatible with Square design mechanims


Pack	Cat.Nos	Panel mounting supports
10	A1400	**For 1 module** For 1 to 3 mm thick panels Clips into a 28 x 53.5 mm aperture ○ Matt White
10	A1401	**For 2 modules** Clips into a 58 x 53.5 mm aperture ○ Matt White
10	5 760 13	**Modular support** For mounting 2-module mechanisms on symetrical rail
5	5 751 90	**IP 44 plate** For British and German standards For mounting in 1-gang box Support frame supplied

Arteor™ Advance

mounting boxes



A1601WH



A1602WH

Pack	Cat.Nos	Surface-mounting boxes
10	A1601WH	For British, German and French standard For 2 modules 90x90x42 mm 38 mm depth
5	A1602WH	For British and French standard For 4 modules 157x90x52 mm 2x2 modules - 2 gang 48 mm depth (suitable for shaver sockets)
2	A1604WH	For British standard For 12 modules - 2 x 6 modules 237.5x178x42 mm 38 mm depth


Pack	Cat.Nos	Flush-mounting boxes
		For British standard 6 and 8-module plates and frames
1	6 890 36	For 6 modules 211.4 x 75.7 x 50.8 mm
1	6 890 38	For 8 modules 231 x 75.7 x 50.8 mm
1	6 890 28	For 2 x 6 modules 212 x 143 x 42 mm
1	0 818 56	For 3 x 6 modules 212 x 212 x 42 mm

Red catalogue numbers: New products

HOTEL EQUIPMENT

Personalised uses

Discover our different covers for recognizable and easy-to-use functions

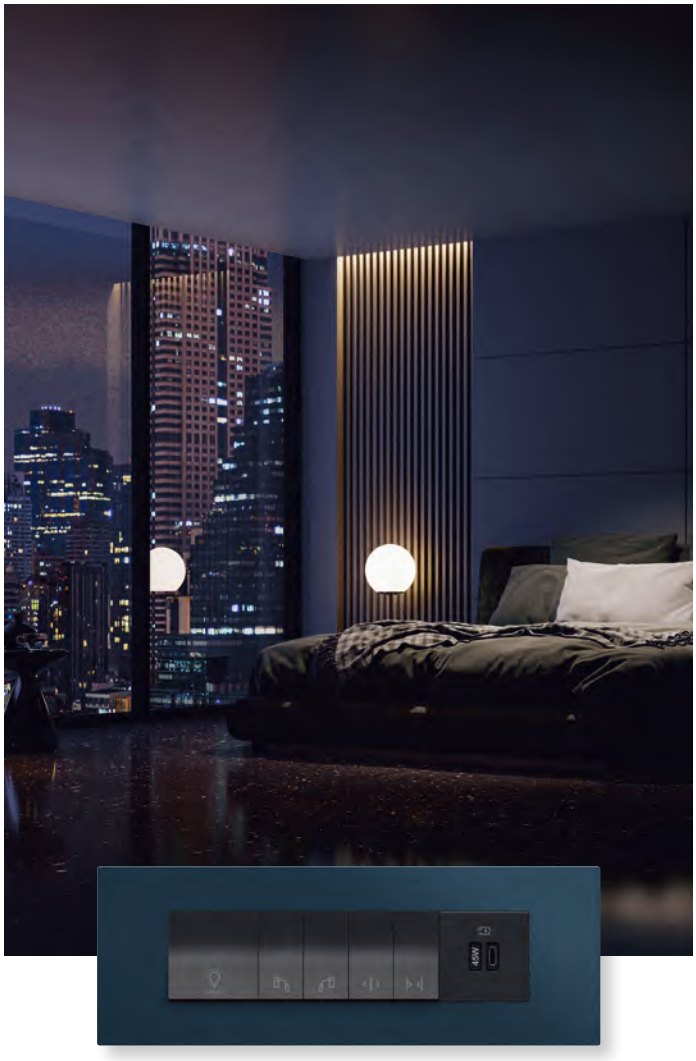


AC22112MW


AC21117MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Lighting control

Master switch - 2 modules

2-way double pole
20 AX - 250 V~ for general control: all ON / all OFF



Pack	Cat.Nos
	Square
10	AC22112MW
10	AC22112MB
10	AC22112MT
10	AC22112CH
10	AC22112DB
10	AC22112RS

○ Matt White
● Matt Black
○ Matt Titanium
○ Champagne
○ Dark Bronze
○ Rose

Master push-button - 2 modules

2-way
10 A - 250 V~ for general control: all ON/ all OFF



Pack	Cat.Nos
10	AC23115MW
10	AC23115MB
10	AC23115MT

○ Matt White
● Matt Black
○ Matt Titanium

Master push-button - 1 module

2-way
10 A - 250 V~ for general control: all ON/ all OFF



Pack	Slender
10	AA23115MW
10	AA23115MB
10	AA23115MT

○ Matt White
● Matt Black
○ Matt Titanium

Switch for bed lights - 2 x 1 module

2 x 2-way switch - 10 AX - 250 V~




Pack	Square	Slender
5	AC21117MW	AA21117MW
5	AC21117MB	AA21117MB
5	AC21117MT	AA21117MT

○ Matt White
● Matt Black
○ Matt Titanium

Push-button for bed lights - 2 x 1 module

2 x 2-way push-button - 10 A - 250 V~




Pack		
5	AC23119MW	AA23119MW
5	AC23119MB	AA23119MB
5	AC23119MT	AA23119MT

○ Matt White
● Matt Black
○ Matt Titanium



AC26110MT




AC26109MW

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Electric roller blind control - 250 VA

Double switch 10 A - 2 modules
For direct control of a motor (mechanism with fixed positions)



○ Matt White
● Matt Black
● Matt Titanium

Pack	Cat.Nos
	Square
10	AC26110MW
10	AC26110MB
10	AC26110MT

Double push-button 10 A - 2 modules
For control via automatic box (N/O mechanism)



○ Matt White
● Matt Black
● Matt Titanium

Pack	Cat.Nos
10	AC26108MW
10	AC26108MB
10	AC26108MT

Curtain control - 250 VA

Double switch 10 A - 2 modules
For direct control of a motor (mechanism with fixed positions)



○ Matt White
● Matt Black
● Matt Titanium

Pack	Cat.Nos
	Square
10	AC26109MW
10	AC26109MB
10	AC26109MT

Double push-button 10 A - 2 modules
For control via automatic box (N/O mechanism)



○ Matt White
● Matt Black
● Matt Titanium

Pack	Cat.Nos
10	AC26107MW
10	AC26107MB
10	AC26107MT

Hotel equipment

room temperature and scenario controls

AA674MW



0 674 59



AA23110MB

Support frame and plate selection charts **p. 108, 116**

Room temperature control

Pack	Cat.Nos
	Slender
1	AA674MW
1	AA674MB
1	AA674MT

Allows you to adjust and monitor the temperature in the room precisely and accurately with a tactile touch
Can control an Air Conditioning System
Power supply: 250V~ 50/60Hz
Ajustable temperature range from 5°C to 35°C
Temperature accuracy: +/- 1°C
Load type: magnetic valve/motor operated valve with 1A capacity
Temperature sensor: internal NTC
Power consumption: < 1W



○ Matt White
● Matt Black
● Matt Titanium

Guest Room Management System compatible Thermostat

Pack	Cat.Nos
	Square
1	0 674 59



Flush-mounted thermostat with backlit display
Can be used to control the temperature of an individual zone, with or without a temperature central unit
Features a temperature probe and an input for the connection of a contact line (e.g. window contact)
Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used
Possibility of automatic operation (summer/winter), with compatible systems
2 modules
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Scenario control - 12V

Pack	Cat.Nos	
	Square	Slender
10	AC23110MW	AA23110MW
10	AC23110MB	AA23110MB
10	AC23110MT	AA23110MT
	Square	
10	AC23118MW	
10	AC23118MB	
10	AC23118MT	

Push-button with LED 12V compatible with Guest Room Management System
Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

1 module


Square Slender





○ Matt White
● Matt Black
● Matt Titanium

2 modules



○ Matt White
● Matt Black
● Matt Titanium

Red catalogue numbers: New products

Hotel equipment

shaver sockets, key card switches, key cards, chimes, buzzers



AC360MB


AC27111MW


AC617MB


AC616MB

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Shaver sockets

Conform to BS EN 61558-2-5. IP 24
For use with European, British, American, Australian 2-pin plugs
Screwless live and neutral terminals
Double wound isolating transformer
Automatic self-resetting overload feature
Plug insertion operates micro-switch which energises transformer
To be equipped with BS 2-gang - 3-module plates (p. 110)
For flush-mounting boxes, use BS 2-gang box depth 48 mm, US type, Italian type boxes depth 48 mm or Cat.No 0 801 55
Power supply: 230 V - 50/60 Hz
3 modules

230 V / 120-230 V



Pack	Cat.Nos	
	Square	
1	AC360MW	○ Matt White
1	AC360MB	● Matt Black
1	AC360MT	● Matt Titanium
1	AC361MW	○ Matt White - with earth connector
1	AC361MB	● Matt Black - with earth connector
1	AC361MT	● Matt Titanium - with earth connector
1	AC361CH	● Champagne
1	AC361DB	● Dark Bronze
1	AC361RS	● Rose

Mechanical key card switches 230 V

For energizing a circuit by inserting a key fob Cat.No 5 722 59 or a smart card (access card for a hotel room)
Example of use: hotel room power supply only when guest is present
Time-delay of approx. 30 sec. after card removal
To be equipped with single pole latching relay Cat.No AC6000MW/MB/MT (p. 88)
2 modules



Pack	Cat.Nos	
	Square	
1	AC27110MW	○ Matt White
1	AC27110MB	● Matt Black
1	AC27110MT	● Matt Titanium
1	AC27110CH	● Champagne
1	AC27110DB	● Dark Bronze
1	AC27110RS	● Rose

RFID key card switches


For energizing a circuit, e.g. meeting room, office, hotel room
Works only with ISO type contactless key card Cat.No 0 767 11 or other ISO type 13.56 MHz key card
Time-delay of approx. 30 sec. after card removal
Low capacity contact 230 V - 30 VA
Lighting of the slot by LED
2 modules



Pack	Cat.Nos	
	Square	
1	AC27111MW	○ Matt White
1	AC27111MB	● Matt Black
1	AC27111MT	● Matt Titanium

Key cards

Key cards
Enable use of key fob switches in hotels with key locks
Supplied complete with a label holder for individual hotel identification



Pack	Cat.Nos	
	Square	
10	5 722 59	○ Matt White
10	5 727 59	● Magnesium

For RFID key card switches



Pack	Cat.Nos	
10	0 767 11	MIFARE contactless badge card ISO format (50 x 80 mm) Chip: 13.56 MHz Standard 1 KB memory

Chimes

230 V - 50 Hz
Consumption: 65 mA
1 melody
Tone level: 73 dB at 1 m
Compatible with push-button Cat.No AC/AA23102 or AC23111



Pack	Cat.Nos	
	Square	
1	AC617MW	○ Matt White
1	AC617MB	● Matt Black

Buzzers

230 V - 1 module



Pack	Cat.Nos	
	Square	
10	AC615MW	○ Matt White
10	AC615MB	● Matt Black

230 V - 2 modules



Pack	Cat.Nos	
10	AC616MW	○ Matt White
10	AC616MB	● Matt Black
10	AC616CH	● Champagne
10	AC616DB	● Dark Bronze
10	AC616RS	● Rose

Red catalogue numbers: New products

Hotel equipment

call indicators, illuminated signs, reading lights


AA27108MB


AA27107MW


AC650MB


AC25101MT

Support frame and plate selection charts **p. 108, 116**

Mechanisms supplied with covers, to be equipped with support frames (p. 108) and plates (p. 116-123)

Hotel bedroom call indicators

Enable the resident to inform hotel staff of the room status
Two settings are possible:
- Do not disturb
- Make up room

2 x 1 module

Indicator for corridor - 230V
Indicator lamp and bell push
Installed in the corridor, displays calls
Supplied with LED

Pack	Square	Slender	
5	AC27108MW	AA27108MW	○ Matt White
5	AC27108MB	AA27108MB	● Matt Black
5	AC27108MT	AA27108MT	○ Matt Titanium
5		AA27108CH	○ Champagne
5		AA27108DB	○ Dark Bronze
5		AA27108RS	○ Rose

Internal control unit - 230V
Indicator lamp and bell push
Allows the user to select the desired setting
Supplied with LED

Pack			
5	AC27107MW	AA27107MW	○ Matt White
5	AC27107MB	AA27107MB	● Matt Black
5	AC27107MT	AA27107MT	○ Matt Titanium
5	AC27107CH	AA27107CH	○ Champagne
5	AC27107DB	AA27107DB	○ Dark Bronze
5	AC27107RS	AA27107RS	○ Rose

Indicator for corridor - 12V
Indicator lamp and bell push
Installed in the corridor, displays calls
Supplied with LED

Pack			
5	AC27103MW	AA27103MW	○ Matt White
5	AC27103MB	AA27103MB	● Matt Black
5	AC27103MT	AA27103MT	○ Matt Titanium

Internal control unit - 12V
Indicator lamp and bell push
Allows the user to select the desired setting
Supplied with LED

Pack			
5	AC27106MW	AA27106MW	○ Matt White
5	AC27106MB	AA27106MB	● Matt Black
5	AC27106MT	AA27106MT	○ Matt Titanium

Illuminated signs

Pack	Square	
5	AC656	

Mechanisms integrating LEDs and a pivoting window that can take customised labels (printed using a simple text editor on transparent printing paper)
230 V~ -1.6 W
4 LED colours depending on the wiring
2 modules

Reading lights

Fitted with maintenance-free LEDs
LED colours: 3000 K (neutral white)
230 V∿ power supply - energy class A
Screw terminals. For installation in the bedhead
Offers directional lighting. Equipped with a flexible cable so the head can swivel
Built-in dimmer. Consumption 3.3 W
Luminous flux 110 lumen (equivalent to 15 W incandescent)
Service life 40000 hours.
For installation in box depth 40 mm min
2 modules

Pack	Square	
1	AC657MW	○ Matt White
1	AC657MB	● Matt Black

Skirting lights

For installation close to obstacles
2 modules

Standard
With LED 230 V∿ - 0.2 or 1 W

Pack	Square	
1	AC650MW	○ Matt White
1	AC650MB	● Matt Black
1	AC650MT	○ Matt Titanium

With motion detector 100-240 V∿
With IR detection cell and LED
When a person passes, the mechanism detects the presence and lights the obstacle
The function is equipped with an audible signal that can be disabled

Pack		
1	AC25101MW	○ Matt White
1	AC25101MB	● Matt Black
1	AC25101MT	○ Matt Titanium











Modular Arteor Advance USB chargers
See p. 100



Red catalogue numbers: New products

Arteor™ Advance - British standard plate selection charts

60.3 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES – Classic Collection: Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
1 module	1-gang	A1402		AC1100MW	AC1100MB	AC1100MT	AC1100CH	AC1100DB	AC1100RS
2 modules		A1402 A1404(1)		AC1102MW	AC1102MB	AC1102MT	AC1102CH	AC1102DB	AC1102RS
3 modules	1-gang	A1404(1)		AC1104MW	AC1104MB	AC1104MT	AC1104CH	AC1104DB	AC1104RS
3 modules	2-gang	A1408		AC1105MW	AC1105MB	AC1105MT	AC1105CH	AC1105DB	AC1105RS
2x2 modules	2-gang	A1409		AC1108MW	AC1108MB	AC1108MT	AC1108CH	AC1108DB	AC1108RS
6 modules	6 890 36	Supplied with support frame		AC1204MW	AC1204MB	AC1204MT	AC1204CH	AC1204DB	AC1204RS
8 modules	6 890 38	Supplied with support frame		AC1206MW	AC1206MB	AC1206MT	AC1206CH	AC1206DB	AC1206RS
2 x 6 modules	6 890 28	Supplied with support frame		AC1209MW	AC1209MB	AC1209MT	AC1209CH	AC1209DB	AC1209RS
SLENDER VERSION									
1 module	1-gang	A1402		-	-	-	-	-	-
2x1 modules	1-gang	A1402 A1404(1)		-	-	-	-	-	-
3x1 modules	1-gang	A1402		-	-	-	-	-	-
For rotary dimmers, fan controls and USB chargers	1-gang	A1402		AA1107MW	AA1107MB	AA1107MT	AA1107CH	AA1107DB	AA1107RS
3x1 modules	2-gang	A1408		-	-	-	-	-	-
2x2 modules	2-gang	A1409		-	-	-	-	-	-

1: Use A1404 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)
2: Can't be installed on smart wired and wireless functions

Red catalogue numbers: New products






PLATES

Decor Collection					Statement Collection						
Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
AC1100FW	AC1100FB	AC1100BS	AC1100AB	AC1100BB	AC1100NB	AC1100SB	AC1100SA	AC1100SC	AC1100SD	AC1100SZ	AC1100SR
AC1102FW	AC1102FB	AC1102BS	AC1102AB	AC1102BB	AC1102NB	AC1102SB	AC1102SA	AC1102SC	AC1102SD	AC1102SZ	AC1102SR
AC1104FW	AC1104FB	AC1104BS	AC1104AB	AC1104BB	AC1104NB	AC1104SB	AC1104SA	AC1104SC	AC1104SD	AC1104SZ	AC1104SR
AC1105FW	AC1105FB	AC1105BS	AC1105AB	AC1105BB	AC1105NB	AC1105SB	AC1105SA	AC1105SC	AC1105SD	AC1105SZ	AC1105SR
AC1108FW	AC1108FB	AC1108BS	AC1108AB	AC1108BB	AC1108NB	AC1108SB	AC1108SA	AC1108SC	AC1108SD	AC1108SZ	AC1108SR
AC1204FW	AC1204FB	AC1204BS	AC1204AB	AC1204BB	AC1204NB	AC1204SB	AC1204SA	AC1204SC	AC1204SD	AC1204SZ	AC1204SR
AC1206FW	AC1206FB	AC1206BS	AC1206AB	AC1206BB	AC1206NB	AC1206SB	AC1206SA	AC1206SC	AC1206SD	AC1206SZ	AC1206SR
AC1209FW	AC1209FB	AC1209BS	AC1209AB	AC1209BB	AC1209NB	AC1209SB	AC1209SA	AC1209SC	AC1209SD	AC1209SZ	AC1209SR
AA1104FW	AA1104FB	AA1104BS(2)	AA1104AB(2)	AA1104BB(2)	AA1104NB(2)	AA1104SB(2)	AA1104SA(2)	AA1104SC(2)	AA1104SD(2)	AA1104SZ(2)	AA1104SR(2)
AA1105FW	AA1105FB	AA1105BS(2)	AA1105AB(2)	AA1105BB(2)	AA1105NB(2)	AA1105SB(2)	AA1105SA(2)	AA1105SC(2)	AA1105SD(2)	AA1105SZ(2)	AA1105SR(2)
AA1106FW	AA1106FB	AA1106BS(2)	AA1106AB(2)	AA1106BB(2)	AA1106NB(2)	AA1106SB(2)	AA1106SA(2)	AA1106SC(2)	AA1106SD(2)	AA1106SZ(2)	AA1106SR(2)
AA1107FW	AA1107FB	AA1107BS(2)	AA1107AB(2)	AA1107BB(2)	AA1107NB(2)	AA1107SB(2)	AA1107SA(2)	AA1107SC(2)	AA1107SD(2)	AA1107SZ(2)	AA1107SR(2)
AA1108FW	AA1108FB	AA1108BS(2)	AA1108AB(2)	AA1108BB(2)	AA1108NB(2)	AA1108SB(2)	AA1108SA(2)	AA1108SC(2)	AA1108SD(2)	AA1108SZ(2)	AA1108SR(2)
AA1109FW	AA1109FB	AA1109BS(2)	AA1109AB(2)	AA1109BB(2)	AA1109NB(2)	AA1109SB(2)	AA1109SA(2)	AA1109SC(2)	AA1109SD(2)	AA1109SZ(2)	AA1109SR(2)

Red catalogue numbers: New products

Arteor™ Advance - Hybrid plate selection charts

60.3 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
HYBRID VERSION									
4 modules **- 2 modules Square** **- 2 modules Slender switch**	2-gang	A1409		-	-	-	-	-	-
5 modules **- 3 modules Square** **- 2 modules Slender for rotary dimmers, fan controls and USB chargers**	6 890 36	A1417		-	-	-	-	-	-
5 modules **- 3 modules Square** **- 2 modules Slender switch**	6 890 36	A1417		-	-	-	-	-	-
5 modules **- 4 modules Square** **- 1 module Slender switch**	6 890 36	A1417		-	-	-	-	-	-
7 modules **- 5 modules Square** **- 2 modules Slender for rotary dimmers, fan controls and USB chargers**	6 890 38	A1411		-	-	-	-	-	-








Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AB1100FW	AB1100FB	AB1100BS	AB1100AB	AB1100BB	AB1100NB	AB1100SB	AB1100SA	AB1100SC	AB1100SD	AB1100SZ	AB1100SR
	AB1200FW	AB1200FB	AB1200BS	AB1200AB	AB1200BB	AB1200NB	AB1200SB	AB1200SA	AB1200SC	AB1200SD	AB1200SZ	AB1200SR
	AB1201FW	AB1201FB	AB1201BS	AB1201AB	AB1201BB	AB1201NB	AB1201SB	AB1201SA	AB1201SC	AB1201SD	AB1201SZ	AB1201SR
	AB1204FW	AB1204FB	AB1204BS	AB1204AB	AB1204BB	AB1204NB	AB1204SB	AB1204SA	AB1204SC	AB1204SD	AB1204SZ	AB1204SR
	AB1206FW	AB1206FB	AB1206BS	AB1206AB	AB1206BB	AB1206NB	AB1206SB	AB1206SA	AB1206SC	AB1206SD	AB1206SZ	AB1206SR

Red catalogue numbers: New products

Arteor™ Advance - special plate selection charts

60.3 mm fixing centre - flush-mounting boxes and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES – Classic Collection: Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
FOR BRITISH STANDARD SOCKET OUTLETS									
For 5 A/13 A switched socket outlet	1-gang	Not needed		AA1100MW	AA1100MB	AA1100MT	AA1100CH	AA1100DB	AA1100RS
For 13 A twin switched socket outlet	2-gang	Not needed		AA1101MW	AA1101MB	AA1101MT	AA1101CH	AA1101DB	AA1101RS
For 5 A/13 A unswitched socket outlet	1-gang	Not needed		AA1102MW	AA1102MB	AA1102MT	AA1102CH	AA1102DB	AA1102RS
For 5 A/13 A unswitched socket outlet	2-gang	Not needed		AA1103MW	AA1103MB	AA1103MT	AA1103CH	AA1103DB	AA1103RS
FOR BRITISH STANDARD SOCKET OUTLETS WITH USB CHARGER									
For single or double pole switched socket + USB Type-A + Type-C & USB Type-C + Type-C	1-gang	Not needed		AA1113MW	AA1113MB	AA1113MT	AA1113CH	AA1113DB	AA1113RS
For single or double pole switched socket + USB Type-A + Type-C	2-gang	Not needed		AA1115MW	AA1115MB	AA1115MT	AA1115CH	AA1115DB	AA1115RS
FOR MULTISTANDARD SOCKET OUTLETS WITH USB CHARGER									
For switched socket + USB Type-A + Type-C & USB Type-C + Type-C	1-gang	Not needed		AA1113MW	AA1113MB	AA1113MT	AA1113CH	AA1113DB	AA1113RS
For switched socket + USB Type-A + Type-C	2-gang	Not needed		AA1117MW	AA1117MB	AA1117MT	AA1117CH	AA1117DB	AA1117RS
FOR 2G 45A DP SWITCH AND 2G SHAVER SOCKET									
3 modules	2-gang	Not needed		AC1136MW	AC1136MB	AC1136MT	AC1136CH	AC1136DB	AC1136RS
FOR COOKER UNIT									
For cooker unit	2-gang	Not needed		AC1109MW	AC1109MB	AC1109MT	AC1109CH	AC1109DB	AC1109RS
FOR BLANKING COVERS									
Blanking cover plate	1-gang	A1402 A1404		AC1501MW	AC1501MB	AC1501MT	AC1501CH	AC1501DB	AC1501RS
Blanking cover plate	2-gang	A1408		AC1502MW	AC1502MB	AC1502MT	-	-	-

Red catalogue numbers: New products







PLATES

	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AA1100FW	AA1100FB	AA1100BS	AA1100AB	AA1100BB	AA1100NB	AA1100SB	AA1100SA	AA1100SC	AA1100SD	AA1100SZ	AA1100SR
	AA1101FW	AA1101FB	AA1101BS	AA1101AB	AA1101BB	AA1101NB	AA1101SB	AA1101SA	AA1101SC	AA1101SD	AA1101SZ	AA1101SR
	AA1102FW	AA1102FB	AA1102BS	AA1102AB	AA1102BB	AA1102NB	AA1102SB	AA1102SA	AA1102SC	AA1102SD	AA1102SZ	AA1102SR
	AA1103FW	AA1103FB	AA1103BS	AA1103AB	AA1103BB	AA1103NB	AA1103SB	AA1103SA	AA1103SC	AA1103SD	AA1103SZ	AA1103SR
	AA1113FW	AA1113FB	AA1113BS	AA1113AB	AA1113BB	AA1113NB	AA1113SB	AA1113SA	AA1113SC	AA1113SD	AA1113SZ	AA1113SR
	AA1115FW	AA1115FB	AA1115BS	AA1115AB	AA1115BB	AA1115NB	AA1115SB	AA1115SA	AA1115SC	AA1115SD	AA1115SZ	AA1115SR
	AA1113FW	AA1113FB	AA1113BS	AA1113AB	AA1113BB	AA1113NB	AA1113SB	AA1113SA	AA1113SC	AA1113SD	AA1113SZ	AA1113SR
	AA1117FW	AA1117FB	AA1117BS	AA1117AB	AA1117BB	AA1117NB	AA1117SB	AA1117SA	AA1117SC	AA1117SD	AA1117SZ	AA1117SR
	AC1136FW	AC1136FB	AC1136BS	AC1136AB	AC1136BB	AC1136NB	AC1136SB	AC1136SA	AC1136SC	AC1136SD	AC1136SZ	AC1136SR
	AC1109FW	AC1109FB	AC1109BS	AC1109AB	AC1109BB	AC1109NB	AC1109SB	AC1109SA	AC1109SC	AC1109SD	AC1109SZ	AC1109SR
	-	-	-	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-

Red catalogue numbers: New products

Arteor™ Advance - Italian / US standards plate selection charts

83.5 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
1 module	0 800 49	A1406		AC1101MW	AC1101MB	AC1101MT	-	-	-
2 modules	0 800 49	A1406		AC1103MW	AC1103MB	AC1103MT	-	-	-
3 modules	0 800 49	A1408		AC1107MW	AC1107MB	AC1107MT	-	-	-
4 modules	0 800 49	A1406		AC1110MW	AC1110MB	AC1110MT	-	-	-
6 modules	0 800 43	A1407		AC1111MW	AC1111MB	AC1111MT	-	-	-
SLENDER VERSION									
3x1 modules	2" x 4"	A1406		-	-	-	-	-	-

Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1101FW	AC1101FB	AC1101BS	-	-	AC1101NB	-	AC1101SA	-	-	-	-
	AC1103FW	AC1103FB	AC1103BS	-	-	AC1103NB	-	AC1103SA	-	-	-	-
	AC1107FW	AC1107FB	AC1107BS	-	-	AC1107NB	-	AC1107SA	-	-	-	-
	AC1110FW	AC1110FB	AC1110BS	-	-	AC1110NB	-	AC1110SA	-	-	-	-
	AC1111FW	AC1111FB	AC1111BS	-	-	AC1111NB	-	AC1111SA	-	-	-	-
	AA1118FW	AA1118FB	AA1118BS	-	-	AA1118NB	-	AA1118SA	-	-	-	-

Red catalogue numbers: New products

ARTEOR™ ADVANCE WITH NETATMO

For All Projects Worldwide

Suitable for all common standards

ARTEOR™ Advance with Netatmo International

Support frame, mechanism and plate to be ordered separately.



Arteor™ Advance with Netatmo British standard

Mechanism with support. Order plate separately.




P. 143

Select the smart functions

Step 1: Zigbee/Wi-Fi Gateway for a smart home

This gateway must be ordered to **start any smart installation**, to create the radio network and the Wi-Fi connection of the smart installation.



Pack control

OR



Mobile control plug

Step 2: Wired products

Add individual smart products to **control** your smart installation.



Smart light switches, smart dimmers, smart curtain/roller blind switches, smart fan controllers...

Step 3: Wireless products

Add individual smart products to **complete** your smart installation.

Flush-mounting version

With battery



Smart wireless light switches, multicolour lighting, fan controller, scenes switches...

Surface-mounting version

With battery

Batteryless: no battery needed



Smart wireless and wireless batteryless light switches, multicolour lighting, curtain/roller blind controls...

Home + Control

The installation can be managed locally or remotely via one single app or voice assistant.

works with Hey Google

works with alexa

Works with Apple HomeKit

Choose your finishing plates

Smart functions	Design	PLATES																		
		CLASSIC COLLECTION						DECOR COLLECTION					STATEMENT COLLECTION							
		Matt White	Matt Black	Matt Titanium	Champ-agne	Dark Bronze	Rose	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Alu-minium	Solid Champ-agne	Solid Sand	Solid Dark Bronze	Solid Rose
Gateway	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Sockets	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Light, curtain/ roller blind, fan switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●										
Wireless switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●										
Wireless Batteryless switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●	●	●	●	●	●	●	●	●	●	●

Arteor™ Advance with Netatmo - International - smart gateway

Must be ordered for any smart installation

Step 1: Gateway for a smart home

Home + Control



AC5110MW



1 991 05

Used to create the radio network and the Wi-Fi connection of the smart installation
Enables remote control of your home (lighting, curtains/roller blinds, fan, temperature and electrical appliances) using a smartphone via the Home + Control app and/or voice control with a voice assistant (Google Assistant, Amazon Alexa, Apple Siri)(1)
Must be ordered to start any smart installation
To be completed by adding individual smart products
2.4 GHz Wi-Fi connection required
Zigbee 3.0 compatible
Manage installation up to 100 products

Pack	Cat.Nos
	Square
1	AC5110MW
1	AC5110MB
1	AC5110MT

Pack control

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147)
Can be installed in place of an existing product
Suitable for flush-mounting box min. depth 35 mm



○ Matt White
● Matt Black
◌ Matt Titanium

Pack	Cat.Nos
1	1 991 05

Mobile control plug



The Control plug makes it easy to connect all "with Netatmo" smart solutions and Zigbee 3.0 lighting
It plugs into an existing power socket and simply connects to the Wi-Fi network
Supplied with both British Standard and European plugs
● Black

1: Availability of voice assistants to be checked in your country

Arteor™ Advance with Netatmo - International - smart light switches

Step 2: Wired products

Home + Control



AC52113MT



AA52113MT



5 742 43

Support frame and plate selection charts **p. 137-147**

Used to create your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos	
	Square	Slender
1	AC52114MW	AA52114MW
1	AC52114MB	AA52114MB
1	AC52114MT	AA52114MT
1	AC52113MW	AA52113MW
1	AC52113MB	AA52113MB
1	AC52113MT	AA52113MT
1	5 742 43	

Smart light switches 100 W LED, wired

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
For local or remote control of lighting
Can be controlled by one or several wireless light switches and/or mechanical 2-way switches
Locator and indicator functions can be activated from the Home + Control app

Without neutral - 1 module
Compatible with all loads:
- LEDs and CFL lamps: 200W LED
- Incandescent and halogen lamps with separate ballast: 200VA

Square / Slender





○ Matt White
● Matt Black
◌ Matt Titanium

With neutral - 1 module
Compatible with all loads:
- LEDs and CFL lamps: 100W LED
- Incandescent and halogen lamps with separate ballast: 250VA





○ Matt White
● Matt Black
◌ Matt Titanium

Smart ON/OFF micromodule, wired



Used to connect lights with a ceiling or wall mounting box installation
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
Compatible with all loads:
- LEDs and CFL lamps: 100 W LED
- Incandescent and halogen lamps: 300 W
- ELV halogen and CFL lamps with separate ballast: 250 VA

Arteor™ Advance with Netatmo - International

smart light switches with dimmer option and smart multicolour switches

Step 2: Wired products


AC52112MT


AC52107MW


0 648 99

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Smart light switches with dimmer option, wired

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
For local or remote ON/OFF or dimming control of lighting
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
Dimmer option and locator and indicator functions can be activated from the Home + Control app

With neutral, 150 W LED
1 module

Compatible with all loads:
- Dimmable LEDs and CFL lamps: 150 W LED
- Incandescent and halogen lamps: 150 W
- ELV halogen and CFL lamps with separate ballast: 150 VA

Level memory function


Square


Slender

○ Matt White
● Matt Black
◌ Matt Titanium

Pack	Square	Slender
1	AC52112MW	AA52112MW
1	AC52112MB	AA52112MB
1	AC52112MT	AA52112MT

Without neutral, 125 W LED
2 modules

Compatible with all loads:
- Dimmable LEDs and CFL lamps: 125 W LED
- Incandescent and halogen lamps: 125 W
- ELV halogen and CFL lamps with separate ballast: 125 VA

Supplied with a bleeder
Level memory function



○ Matt White
● Matt Black
◌ Matt Titanium

Pack	Square
1	AC52107MW
1	AC52107MB
1	AC52107MT

Smart micromodule with dimmer option, wired



Used to connect lights with a ceiling box installation
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
For local or remote ON/OFF / dimming control of lighting
Dimmer can be activated from the Home + Control app
Level memory function Compatible with all loads:
- dimmable LEDs and CFL lamps: 150 W LED
- Incandescent and halogen lamps: 150 W
- ELV halogen and CFL lamps with separate ballast: 150 VA

Pack	Cat.Nos
1	0 648 99

Smart multicolour switches, wired

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
Allow to directly control up to 20 Zigbee 3.0 compatible multicolour lighting (e.g. Ledvance Smart+, Zigbee, Philips Hue,...)
Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
Allows aesthetic consistency for modular installation
To be associated with the lighting in the Home + Control app
Allow ON/OFF and dimming control of 3 light moods which have to be defined in the Home + Control app
Not compatible with Wi-Fi lighting

1 module with neutral


Square


Slender

○ Matt White
● Matt Black
◌ Matt Titanium

Pack	Square	Slender
1	AC52115MW	AA52115MW
1	AC52115MB	AA52115MB
1	AC52115MT	AA52115MT

Red catalogue numbers: New products

Step 2: Wired products

Home + Control



AC52109MW



AA52106MW


Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible
Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)

Pack	Cat.Nos		
	Square	Slender	
1	AC52109MW	AA52109MW	Matt White
1	AC52109MB	AA52109MB	Matt Black
1	AC52109MT	AA52109MT	Matt Titanium

Smart rotary dimmer switch, wired with or without neutral

Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
For local or remote ON/OFF or dimming control of lighting
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
Locator and indicator functions can be activated from the Home + Control app
Compatible with all loads:
-Dimmable LEDs and CFL lamps: 200W LED
-Incandescent and halogen lamps: 200W
-ELV halogen and CFL lamps with separate ballast: 200VA
2 modules
Wiring with neutral offers a better compatibility with loads

Square  Slender 

Pack	Cat.Nos		
	Square	Slender	
1	AC52106MW	AA52106MW	Matt White
1	AC52106MB	AA52106MB	Matt Black
1	AC52106MT	AA52106MT	Matt Titanium

Smart rotary multicolour dimmer switch, wired with neutral

Can be installed in place of an existing switch in a flush-mounting box depth 35 mm
Ensure aesthetic consistency for modular installation
Allow to directly control up to 20 Zigbee 3.0 compatible multi-colour lights (e.g. Ledvance Smart+, Zigbee, Philips Hue, etc.)
To be associated with the lighting in the Home + Control app
Enable ON/OFF control, dimming and colour changing of lights
Not compatible with Wi-Fi lighting
2 modules

Square  Slender 

Smart light switches with dimmer option

Cat.Nos	Wiring	Dimmable LEDs and CFLs with integrated electronic ballast Max. power (W)		Halogen/ Incandescent lamps Max. power (W)		Halogen and fluorescent tube with ferromagnetic tranformer Max. power (VA)	
		110V~	230V~	110V~	230V~	110V~	230V~
AC/AA52112MW AC/AA52112MB AC/AA52112MT	With neutral	75	150	75	150	-	-
AC52107MW AC52107MB AC52107MT	Without neutral[1]	60	125	60	125	60	150

Smart rotary dimmer switch

Cat.Nos	Wiring	Dimmable LEDs and CFLs with integrated electronic ballast Max. power (W)		Halogen/ Incandescent lamps Max. power (W)		Halogen and fluorescent tube with ferromagnetic tranformer Max. power (VA)	
		110V~	230V~	110V~	230V~	110V~	230V~
AC/AA52109MW AC/AA52109MB AC/AA52109MT	With neutral	100	200	100	200	100	200
	Without neutral[1]						

Smart rotary multicolour dimmer

Cat.Nos	Wiring	zigbee Zigbee lights (bulbs, LED strip or spotlight controllers, luminaires...) Max. power (W)
AC/AA52106MW AC/AA52106MB AC/AA52106MT	With neutral	Unlimited[2]

1: Compensator recommended
2: Can control up to 20 Zigbee lights with no limit of power

Arteor™ Advance with Netatmo - International

smart fan controller, smart curtain/roller blind switches

Step 2: Wired products

Home + Control


AA5510MW


AC5310MT


0 676 97


0 676 96

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Smart fan controller 4 speeds

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
For local or remote control via Home + Control app
Can control one or several wireless fans
Compatible with all asynchronous fan engines AC 230 V ~ 100 W maximum
Not compatible with DC fan engines
Can be installed in place of an existing fan control on a flush-mounting box min. depth 40 mm
Neutral required
LED indicators to visualize the fan speed
2 modules

Pack	Cat.Nos	
	Square	Slender
1	AC5510MW	AA5510MW
1	AC5510MB	AA5510MB
1	AC5510MT	AA5510MT

Square 
Slender 

○ Matt White
● Matt Black
◌ Matt Titanium

Smart curtain/roller blind switch 500 VA

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
For local and remote control of a 230 V∿ roller blind (raise/lower/stop functions and level management)
Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds
Can be paired with one or several roller blind wireless switches
Can be installed in place of an existing roller blind switch in a flush-mounting box depth 35 mm
1 module - with neutral

Pack	Cat.Nos	
	Square	Slender
1	AC5310MW	AA5310MW
1	AC5310MB	AA5310MB
1	AC5310MT	AA5310MT

Square 
Slender 

○ Matt White
● Matt Black
◌ Matt Titanium

Smart curtain/roller blind micromodule 500 VA - IP 44

Pack	Cat.Nos
1	0 676 97



For local and remote control of a 230 V∿ roller blind (raise/lower/stop functions and level management)
Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds
Can be paired with one or several roller blind wireless switches
To be installed in the ceiling box or roller blind box to connect a new or existing roller blind

Smart module for garage door and gate (dry contact)

Pack	Cat.Nos
1	0 676 96



Enables open/close control of a garage door or gate, locally, remotely or via voice assistant (Google Home and Amazon Alexa)
Status display (open/closed/level) in the Home + Control app
Can be controlled by using a curtain/roller blind wireless control (p. 133) or a wireless scene control (e.g. Cat.No 0 676 95 p. 136)
Supplied with 2 wired position sensors
Can be installed in an IP 55 Plexo box 80 x 80 mm or larger and in parallel of an existing mechanical push-button
Fitted with 2 removable fixing points
Compatible with any garage door and gate engine equipped with a dry contact entry for mechanical push-button

Arteor™ Advance with Netatmo - International

smart socket outlets, cable outlet

Step 2: Wired products

Home + Control


AC5410MW


AC5411MT


AC5412MW


0 648 89

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos	
	Square/Slender	
1	AC5410MW	○ Matt White
1	AC5410MB	● Matt Black
1	AC5410MT	◌ Matt Titanium

Smart British standard socket outlets, 13 A - 250 V, switched, single pole

Conform to BS 1363-2 and IEC 60669-2-5
Compact mechanism (22 mm deep)
Shuttered for child safety
Protected against overloads
Socket outlets can be controlled by one or several smart wireless light switches
Remote control via the Home + Control app
Compatible with any electrical appliance or large household appliance
Smart socket outlets allow to:
- remotely control electrical appliances
- measure instantaneous power
- monitor daily and monthly consumption
- send configurable notifications in case of abnormal use (overconsumption, etc.)

Can be installed in place of an existing socket outlet in a flush-mounting box min. depth 35mm
LED indicator function can be activated from the Home + Control app

2P+E switched - 1-gang

Mechanisms supplied with cover plates and support frames, to be equipped with plates (see p. 138)




○ Matt White
● Matt Black
◌ Matt Titanium

2 x 2P+E switched - 2-gang

Mechanisms supplied with cover plates and support frames, to be equipped with plates (see p. 138)

1	AC5411MW	○ Matt White
1	AC5411MB	● Matt Black
1	AC5411MT	◌ Matt Titanium



Smart cable outlet

Conform to IEC 60669-2-1
Enables remote control of electrical devices
Wiring compatible with pilot wire
Can be controlled by one or several smart wireless light switches
3000 W max. (protected against overloads)
Functions:
- ON/OFF, pilot wire management
- instantaneous power measurement and daily/monthly consumption monitoring with configurable sending of notifications (defect, consumption, etc.)

Supplied with mounting support, cover plate and worksite protection
Multi-gang mounting not possible

1	0 648 79	○ White
1	0 648 47	● Black
1	0 648 82	◌ Titanium



Pack	Cat.Nos	
	Square	
1	AC5412MW	○ Matt White
1	AC5412MB	● Matt Black
1	AC5412MT	◌ Matt Titanium

Smart socket outlet module - 16 A - 230 V~ - 3680 W, 1 module

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
Allows to create a smart socket outlet for integration into the smart installation
To be wired to a traditional socket outlet
Smart socket outlets can be controlled by one or several wireless light switches
Remote control via the Home + Control app
Compatible with any electrical appliances or large household appliances
Smart socket outlets allow to
- remotely control electrical appliances
- measure instantaneous power
- monitor daily and monthly consumption
- send notifications in case of abnormal use (overconsumption etc.)

Can be installed in place of an existing socket outlet in a flush-mounting box min. depth 40 mm
LED indicator function can be activated from the Home + Control app



○ Matt White
● Matt Black
◌ Matt Titanium

Smart mobile socket outlet

Conform to IEC 60884-2-5 and IEC 60669-2-5
To be plugged directly into an existing socket outlet
For control of lights, electrical appliances and large household appliances
Can be controlled by one or several wireless light switches
- ON/OFF LED indicator function

Smart mobile socket outlets allow to
- remotely control electrical appliances
- measure instantaneous power
- monitor daily and monthly consumption
- send notifications in case of abnormal use (overconsumption etc.)

LED indicator function can be activated from the Home + Control app

1	0 648 89	13 A British standard smart mobile socket outlet - 3000 W ● Magnesium
1	5 742 54	16 A German standard smart mobile socket outlet - 3680 W ● Magnesium






Red catalogue numbers: New products

SMART WIRELESS
MULTICOLOUR SWITCHES


CUSTOMIZE
YOUR FAVOURITE ATMOSPHERES



Configure up to **3 lighting moods** on the **Home + Control app** and control the light via your **smartphone** or the **smart wireless multicolour switch.**

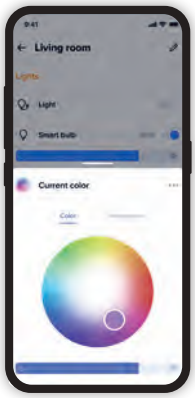


Colour preset

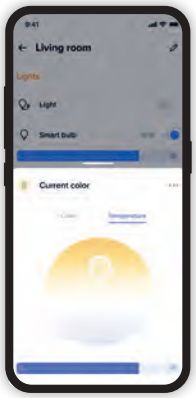

Light intensity preset

Home + Control

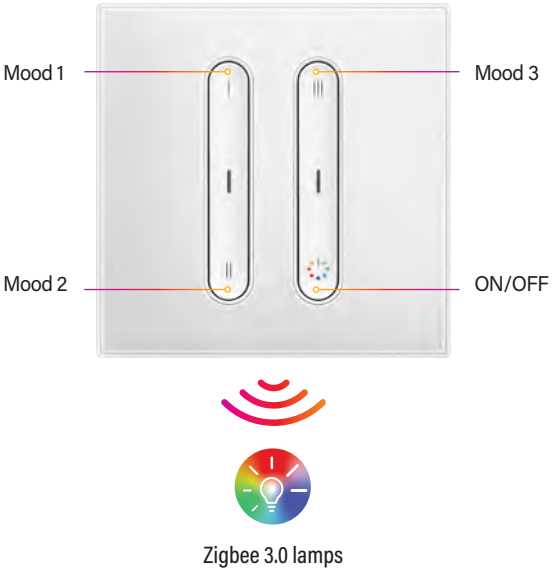

Zigbee 3.0 lamps

To be combined with multicolour Zigbee lighting devices.
Can control up to **20 Zigbee lights with no power limit.**

Arteor™ Advance with Netatmo - International

smart wireless switches for multicolour lighting

Step 3: Wireless products

Home + Control



AA5205MW





AC5204MW

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		
			Smart wireless switches for multicolour lighting Allow to directly control up to 20 Zigbee 3.0 compatible multicolour lights (e.g. Ledvance Smart+ Zigbee, Philips Hue, etc.) with no power limit To be associated with the lighting in the Home + Control app Allows ON/OFF and dimming control of 3 light moods which have to be preset in the Home + Control app Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Not compatible with Wi-Fi lighting
	Square	Slender	**Surface-mounting version, 2-gang** Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate To be equipped with plates (p. 138-147)
1	AC5205MW	AA5205MW	Matt White
1	AC5205MB	AA5205MB	Matt Black
1	AC5205MT	AA5205MT	Matt Titanium
			Flush-mounting version, 1 module Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147) Can be installed in a flush-mounting box depth 35 mm Allows aesthetic consistency for modular installation
1	AC5204MW	AA5204MW	Matt White
1	AC5204MB	AA5204MB	Matt Black
1	AC5204MT	AA5204MT	Matt Titanium





Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International

smart wireless light switches

Step 3: Wireless products


AC5201MT


AA5202MB


AA5206MW


AA5207MW

Plate selection charts **p. 137-147**



Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible
Compatible with the dimming function

Smart wireless light switches

Used to add an extra control for wired switches, micromodules, socket outlets, cable outlets
Easy pairing by tapping the wired product or by using the Home + Control app
Supplied with CR2032 3V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication
Dimmer mode can be actived from the Home + Control app
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)



Surface-mounting version, 1-gang
Controls up to 20 wired products

Pack	Square	Slender
1	AC5201MW	AA5201MW
1	AC5201MB	AA5201MB
1	AC5201MT	AA5201MT



○ Matt White
● Matt Black
○ Matt Titanium



Surface-mounting version, 2-gang
Controls up to 2x20 wired products

Pack	Square	Slender
1	AC5202MW	AA5202MW
1	AC5202MB	AA5202MB
1	AC5202MT	AA5202MT



○ Matt White
● Matt Black
○ Matt Titanium

Surface-mounting version, 3-gang
Controls up to 3x20 wired products

Pack	Square	Slender
1	AC5203MW	AA5203MW
1	AC5203MB	AA5203MB
1	AC5203MT	AA5203MT



○ Matt White
● Matt Black
○ Matt Titanium

Flush-mounting version, 1 module
Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147)
Can be installed in a flush-mounting box depth 35 mm
Allows aesthetic consistency for modular installation

Pack	Square	Slender
1	AC5200MW	AA5200MW
1	AC5200MB	AA5200MB
1	AC5200MT	AA5200MT





○ Matt White
● Matt Black
○ Matt Titanium

Smart wireless batteryless light switches

Extra-slim, maintenance-free device without any battery
Used to add an extra control for wired switches, micromodules, socket outlets and cable outlets
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Easy pairing by tapping the wired product (switches, micromodules, socket outlets) or by using the Home + Control app
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)



Surface-mounting version, 1-gang
Controls up to 20 wired products

Pack	Square	Slender
1	AC5206MW	AA5206MW
1	AC5206MB	AA5206MB
1	AC5206MT	AA5206MT



○ Matt White
● Matt Black
○ Matt Titanium

Surface-mounting version, 2-gang
Controls up to 2x20 wired products

Pack	Square	Slender
1	AC5207MW	AA5207MW
1	AC5207MB	AA5207MB
1	AC5207MT	AA5207MT



○ Matt White
● Matt Black
○ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International

smart wireless motion sensor and switch ON/OFF module

Step 3: Wireless products

Home + Control



5 742 52



0 676 94

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos	
1	5 742 52	**Smart wireless motion sensor IP 44** Allows to control up to 20 wired switches, micromodules, socket outlets and cable outlets Easy pairing by tapping the wired products or by using the Home + Control app Supplied with 2 x AA battery For indoor and outdoor use Recommended distance between 2 sensors: 6 m Recommended installation height: 2.5 m Time delay adjustable from 15 s to 15 min Range: 8 m Detection angle: 140° Sensor range adjustable from 2 m to 8 m With ON/OFF test buttons Light level threshold adjustable from 1 to 1000 lux
1	0 676 94	**Smart wireless switch ON/OFF module** Allows to transform a mechanical 2-way switch or push-button into a wireless ON/OFF switch. Small size for easy integration into the wall box To be paired with one smart switch, micromodule, socket outlet Supplied with CR2032 3V long-life battery for power supply

Arteor™ Advance with Netatmo - International - smart wireless fan controller

Step 3: Wireless products

Home + Control



AA5501MB

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		
			Smart wireless fan controller, flush-mounting version Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147) Used to add an extra control point without wiring Controls up to 20 wired fan step regulators (p. 122) Pair by tapping the selected fan step regulator or by using the Home + Control app Supplied with CR2032 3 V long-life battery for power supply LED function for low battery indication Can be installed in a flush-mounting box depth 35 mm Allows aesthetic consistency for modular installation 1 module
	Square	Slender	
1	AC5501MW	AA5501MW	Square  Slender  ○ Matt White
1	AC5501MB	AA5501MB	● Matt Black
1	AC5501MT	AA5501MT	○ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International

smart wireless curtain/roller blind switches

Step 3: Wireless products

Home + Control



AC5301MT



AA5300MW



AA5302MB

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		Smart wireless curtain/roller blind switches
			Used for remote control or centralization of up to 20 wired smart roller blind switches Pair by tapping the selected roller blind switch(es) or by using the Home + Control app Supplied with CR2032 3 V long-life battery for power supply Easy access to the battery for maintenance LED function for low battery indication **Surface-mounting version, 1-gang** Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate To be equipped with plates (p. 138-147)
	Square	Slender	Square Slender
1	AC5301MW	AA5301MW	○ Matt White
1	AC5301MB	AA5301MB	● Matt Black
1	AC5301MT	AA5301MT	○ Matt Titanium
			Flush-mounting version, 1 module Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147) Can be installed in a flush-mounting box depth 35 mm Allows aesthetic consistency for modular installation
1	AC5300MW	AA5300MW	○ Matt White
1	AC5300MB	AA5300MB	● Matt Black
1	AC5300MT	AA5300MT	○ Matt Titanium

Pack	Cat.Nos		Smart wireless batteryless curtain/roller blind switch
			Extra-slim, maintenance-free device without any battery Used for remote control or centralization of up to 20 wired roller blind switches Energy harvesting mechanism that generates by itself the energy required for the switching process Qualified for 1 million cycles Smooth and silent switching Pair by tapping the selected roller blind switch(es) or by using the Home + Control app **Surface-mounting version, 2-gang** Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate To be equipped with plates (p. 138-147)
	Square	Slender	Square Slender
1	AC5302MW	AA5302MW	○ Matt White
1	AC5302MB	AA5302MB	● Matt Black
1	AC5302MT	AA5302MT	○ Matt Titanium

Arteor™ Advance with Netatmo - International

smart wireless scene switches

Step 3: Wireless products

Home + Control



AA5702MW



AA5703MT



AA5708MW

Support frame and plate selection charts **p. 137-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5702MW	AA5702MW
1	AC5702MB	AA5702MB
1	AC5702MT	AA5702MT
1	AC5703MW	AA5703MW
1	AC5703MB	AA5703MB
1	AC5703MT	AA5703MT


Smart Wake Up/Sleep wireless switches


Used to add 2 extra scenes to a smart installation
Preset Wake up/Sleep life scenes which can be customised in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication

Surface-mounting version, 1-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Square Slender





○ Matt White
● Matt Black
◌ Matt Titanium

Flush-mounting version, 1 module

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147)
Can be installed in a flush-mounting box depth 35 mm
Allows aesthetic consistency for modular installation





○ Matt White
● Matt Black
◌ Matt Titanium

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5708MW	AA5708MW
1	AC5708MB	AA5708MB
1	AC5708MT	AA5708MT


Smart Wake Up/Sleep wireless batteryless switch


Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Preset Wake up/Sleep life scenes which can be customised in the Home + Control app

Surface-mounting version, 1-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Square Slender





○ Matt White
● Matt Black
◌ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International

smart wireless scene switches (continued)

Step 3: Wireless products

Home + Control



AC5701MB



AC5704MT



AA5707MW

Support frame and plate selection charts **p. 137-147**



Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Smart Home/Away wireless switches

Used to add 2 extra scenes to a smart installation
Home/Away life scenes can be customised in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication

Surface-mounting version, 1-gang

Supplied with cover plate, multistandard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Pack	Cat.Nos Square	Cat.Nos Slender	Square	Slender	
1	AC5701MW	AA5701MW			○ Matt White
1	AC5701MB	AA5701MB			● Matt Black
1	AC5701MT	AA5701MT			◌ Matt Titanium

Flush-mounting version, 1 module

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138-147)
Can be installed in a flush-mounting box depth 35 mm
Allows aesthetic consistency for modular installation


Pack	Cat.Nos Square	Cat.Nos Slender			
1	AC5704MW	AA5704MW			○ Matt White
1	AC5704MB	AA5704MB			● Matt Black
1	AC5704MT	AA5704MT			◌ Matt Titanium

Smart Home/Away wireless batteryless switch

Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Home/Away life scenes can be customised in the Home + Control app

Surface-mounting version, 1-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Pack	Cat.Nos Square	Cat.Nos Slender	Square	Slender	
1	AC5707MW	AA5707MW			○ Matt White
1	AC5707MB	AA5707MB			● Matt Black
1	AC5707MT	AA5707MT			◌ Matt Titanium

Step 3: Wireless products

Home + Control



AC5700MW



0 676 95



AA5705MB

Support frame and plate selection charts **p. 138-147**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible


Smart 4 scenes wireless switches


Used to add 4 customised scenes to a smart installation
Scenes can be customised in the Home + Control app
Possibility to assign personalized names and to associate icons to the scenes in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance

Surface-mounting version, 2-gang

LED function for low battery indication
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Pack	Square	Slender
1	AC5700MW	AA5700MW
1	AC5700MB	AA5700MB
1	AC5700MT	AA5700MT






○ Matt White
● Matt Black
◌ Matt Titanium

Pocket remote control

Pack	Cat.Nos
1	0 676 95



Can be attached to a keyring
● Magnesium


Smart 4 scenes wireless batteryless switch


Extra-slim, maintenance-free device without any battery
Used to add 4 customised scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Scenes can be customised in the Home + Control app
Possibility to assign personalized names and to associate icons to the scenes in the Home + Control app

Surface-mounting version, 2-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 138-147)

Pack	Square	Slender
1	AC5705MW	AA5705MW
1	AC5705MB	AA5705MB
1	AC5705MT	AA5705MT





○ Matt White
● Matt Black
◌ Matt Titanium

Accessory

Pack	Cat.Nos
1	0 648 71

Pack of 3 x 4 extra removable stickers for fixing a wireless control

Arteor™ Advance





international support frames, blank modules


A1402




A1408


A1407

Plate selection charts **p. 137 to 147**

Pack	Cat.Nos	Support frames for BS type boxes 60.3 mm fixing centres
		Screw mounting (screws supplied)
		For 1-gang box
10	A1402	For 1 or 2 modules 
5	A1404	For 3 modules Horizontal and vertical 
		For 2-gang box
10	A1408	Rectangular - for 3 modules Horizontal and vertical 
10	A1409	Rectangular - for 2 x 2 modules 
		For 4"x4" boxes
10	A1410	For 2, 3 and 4 modules 
		For 6 modules
5	A1417	Horizontal mounting 
		For 8 modules
5	A1411	Horizontal mounting 






Pack	Cat.Nos	Support frames for US and Italian type boxes
		Screw mounting
		For 1-gang box
10	A1406	For 1 to 3 modules 

Pack	Cat.Nos	Support frames for Italian/ French/German type boxes
		Screw mounting
10	A1405	For 4 modules 
5	A1407	For 6 modules 

Pack	Square	Slender	Blank modules
			1 module
			Square  Slender  ○ Matt White ● Matt Black ◌ Matt Titanium
20	AC150MW	AA150MW	
20	AC150MB	AA150MB	
20	AC150MT	AA150MT	
	Square		**2 modules**
10	AC153MW		 ○ Matt White ● Matt Black ◌ Matt Titanium
10	AC153MB		
10	AC153MT		

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International, British standard plate selection charts - 60.3 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES – Classic Collection: Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
1 module	1-gang	A1402		AC1100MW	AC1100MB	AC1100MT	AC1100CH	AC1100DB	AC1100RS
2 modules		A1402 A1404(1)		AC1102MW	AC1102MB	AC1102MT	AC1102CH	AC1102DB	AC1102RS
Surface-mounting Wireless Switches 1-gang **Surface-mounting Wireless Switches 2-gang** **Surface-mounting Wireless Switches 3-gang** **Surface-mounting Wireless Batteryless Switches 1-gang** **Surface-mounting Wireless Batteryless Switches 2-gang**	Fixing possible on existing box with 60.3 mm fixing centre	Not needed	 (1)	AC1102MW	AC1102MB	AC1102MT	AC1102CH	AC1102DB	AC1102RS
3 modules	1-gang	A1404(1)		AC1104MW	AC1104MB	AC1104MT	AC1104CH	AC1104DB	AC1104RS
3 modules	2-gang	A1408		AC1105MW	AC1105MB	AC1105MT	AC1105CH	AC1105DB	AC1105RS
2x2 modules	2-gang	A1409		AC1108MW	AC1108MB	AC1108MT	AC1108CH	AC1108DB	AC1108RS
6 modules	6 890 36	Supplied with support frame		AC1204MW	AC1204MB	AC1204MT	AC1204CH	AC1204DB	AC1204RS
8 modules	6 890 38	Supplied with support frame		AC1206MW	AC1206MB	AC1206MT	AC1206CH	AC1206DB	AC1206RS
2 x 6 modules	6 890 28	Supplied with support frame		AC1209MW	AC1209MB	AC1209MT	AC1209CH	AC1209DB	AC1209RS




1: Use A1404 support frame for 2 module mechanisms to be mounted on 3 module support frame (see mention in catalogue page)

Red catalogue numbers: New products

PLATES

	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1100FW	AC1100FB	AC1100BS	AC1100AB	AC1100BB	AC1100NB	AC1100SB	AC1100SA	AC1100SC	AC1100SD	AC1100SZ	AC1100SR
	AC1102FW	AC1102FB	AC1102BS	AC1102AB	AC1102BB	AC1102NB	AC1102SB	AC1102SA	AC1102SC	AC1102SD	AC1102SZ	AC1102SR
	AC1102FW	AC1102FB	AC1102BS	AC1102AB	AC1102BB	AC1102NB	AC1102SB	AC1102SA	AC1102SC	AC1102SD	AC1102SZ	AC1102SR
	AC1104FW	AC1104FB	AC1104BS	AC1104AB	AC1104BB	AC1104NB	AC1104SB	AC1104SA	AC1104SC	AC1104SD	AC1104SZ	AC1104SR
	AC1105FW	AC1105FB	AC1105BS	AC1105AB	AC1105BB	AC1105NB	AC1105SB	AC1105SA	AC1105SC	AC1105SD	AC1105SZ	AC1105SR
	AC1108FW	AC1108FB	AC1108BS	AC1108AB	AC1108BB	AC1108NB	AC1108SB	AC1108SA	AC1108SC	AC1108SD	AC1108SZ	AC1108SR
	AC1204FW	AC1204FB	AC1204BS	AC1204AB	AC1204BB	AC1204NB	AC1204SB	AC1204SA	AC1204SC	AC1204SD	AC1204SZ	AC1204SR
	AC1206FW	AC1206FB	AC1206BS	AC1206AB	AC1206BB	AC1206NB	AC1206SB	AC1206SA	AC1206SC	AC1206SD	AC1206SZ	AC1206SR
	AC1209FW	AC1209FB	AC1209BS	AC1209AB	AC1209BB	AC1209NB	AC1209SB	AC1209SA	AC1209SC	AC1209SD	AC1209SZ	AC1209SR

Arteor™ Advance with Netatmo - International, British standard plate selection charts - 60.3 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES – Classic Collection: Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SLENDER VERSION									
1 module	1-gang	A1402		-	-	-	-	-	-
2x1 modules	1-gang	A1402 A1404(1)		-	-	-	-	-	-
3x1 modules	1-gang	A1402		-	-	-	-	-	-
For rotary dimmers	1-gang	A1402		AA1107MW	AA1107MB	AA1107MT	-	-	-
3x1 modules	2-gang	A1408		-	-	-	-	-	-
2x2 modules	2-gang	A1409		-	-	-	-	-	-
Surface-mounting Wireless switches 1-gang	Fixing possible on existing box with 60.3 mm fixing centre	Not needed	 (1)	-	-	-	-	-	-
Surface-mounting Wireless switches 2-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless switches 3-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless Batteryless switches 1-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless Batteryless switches 2-gang									






1: Fins to be removed from the support frame for mounting in BS plates

Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AA1104FW	AA1104FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-
	AA1119FW	AA1119FB	-	-	-	-	-	-	-	-	-	-
	AA1107FW	AA1107FB	-	-	-	-	-	-	-	-	-	-
	AA1108FW	AA1108FB	-	-	-	-	-	-	-	-	-	-
	AA1109FW	AA1109FB	-	-	-	-	-	-	-	-	-	-
	AA1104FW	AA1104FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-
	AA1119FW	AA1119FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-

Arteor™ Advance with Netatmo - International, Hybrid plate selection charts

60.3 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
HYBRID VERSION									
4 modules - 2 modules Square - 2 modules Slender switch	2-gang	A1409		-	-	-	-	-	-
5 modules - 3 modules Square - 2 modules Slender for rotary dimmers, fan controls and USB chargers	6 890 36	A1417		-	-	-	-	-	-
5 modules - 3 modules Square - 2 modules Slender switch	6 890 36	A1417		-	-	-	-	-	-
5 modules - 4 modules Square - 1 module Slender switch	6 890 36	A1417		-	-	-	-	-	-
7 modules - 5 modules Square - 2 modules Slender for rotary dimmers, fan controls and USB chargers	6 890 38	A1411		-	-	-	-	-	-

1: These finishes can be installed with a Smart function in Slender design, provided that at least one Square function is a Smart Wired one



Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AB1100FW	AB1100FB	AB1100BS(1)	AB1100AB(1)	AB1100BB(1)	AB1100NB(1)	AB1100SB	AB1100SA(1)	AB1100SC(1)	AB1100SD(1)	AB1100SZ(1)	AB1100SR(1)
	AB1200FW	AB1200FB	AB1200BS(1)	AB1200AB(1)	AB1200BB(1)	AB1200NB(1)	AB1200SB	AB1200SA(1)	AB1200SC(1)	AB1200SD(1)	AB1200SZ(1)	AB1200SR(1)
	AB1201FW	AB1201FB	AB1201BS(1)	AB1201AB(1)	AB1201BB(1)	AB1201NB(1)	AB1201SB	AB1201SA(1)	AB1201SC(1)	AB1201SD(1)	AB1201SZ(1)	AB1201SR(1)
	AB1204FW	AB1204FB	AB1204BS(1)	AB1204AB(1)	AB1204BB(1)	AB1204NB(1)	AB1204SB	AB1204SA(1)	AB1204SC(1)	AB1204SD(1)	AB1204SZ(1)	AB1204SR(1)
	AB1206FW	AB1206FB	AB1206BS(1)	AB1206AB(1)	AB1206BB(1)	AB1206NB(1)	AB1206SB	AB1206SA(1)	AB1206SC(1)	AB1206SD(1)	AB1206SZ(1)	AB1206SR(1)

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International, special plate selection charts

60.3 mm fixing centre - flush-mounting boxes and plates







Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
FOR BRITISH STANDARD SMART SOCKET OUTLETS									
1-gang	1-gang	Not needed		AC1104MW	AC1104MB	AC1104MT	AC1104CH	AC1104DB	AC1104RS
2-gang	2-gang			AC1112MW	AC1112MB	AC1112MT	AC1112CH	AC1112DB	AC1112RS
FOR BLANKING COVERS									
Blanking cover plate	1-gang	A1402 A1404		AC1501MW	AC1501MB	AC1501MT	AC1501CH	AC1501DB	AC1501RS
Blanking cover plate	2-gang	A1408		AC1502MW	AC1502MB	AC1502MT	-	-	-

Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1104FW	AC1104FB	AC1104BS	AC1104AB	AC1104BB	AC1104NB	AC1104SB	AC1104SA	AC1104SC	AC1104SD	AC1104SZ	AC1104SR
	AC1112FW	AC1112FB	AC1112BS	AC1112AB	AC1112BB	AC1112NB	AC1112SB	AC1112SA	AC1112SC	AC1112SD	AC1112SZ	AC1112SR
	-	-	-	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - International, Italian / US standards plate selection charts - 83.5 mm fixing centre - flush-mounting boxes, support frames and plates

Number of modules per mechanism	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
1 module	0 800 49	A1406		AC1101MW	AC1101MB	AC1101MT	-	-	-
2 modules	0 800 49	A1406		AC1103MW	AC1103MB	AC1103MT	-	-	-
3 modules	0 800 49	A1408		AC1107MW	AC1107MB	AC1107MT	-	-	-
4 modules	0 800 49	A1406		AC1110MW	AC1110MB	AC1110MT	-	-	-
6 modules	0 800 43	A1407		AC1111MW	AC1111MB	AC1111MT	-	-	-
SLENDER VERSION									
3x1 modules	2" x 4"	A1406		-	-	-	-	-	-

Red catalogue numbers: New products

PLATES												
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1101FW	AC1101FB	AC1101BS	-	-	AC1101NB	-	AC1101SA	-	-	-	-
	AC1103FW	AC1103FB	AC1103BS	-	-	AC1103NB	-	AC1103SA	-	-	-	-
	AC1107FW	AC1107FB	AC1107BS	-	-	AC1107NB	-	AC1107SA	-	-	-	-
	AC1110FW	AC1110FB	AC1110BS	-	-	AC1110NB	-	AC1110SA	-	-	-	-
	AC1111FW	AC1111FB	AC1111BS	-	-	AC1111NB	-	AC1111SA	-	-	-	-
	AA1118FW	AA1118FB	-	-	-	-	-	-	-	-	-	-

Red catalogue numbers: New products

ARTEOR™ ADVANCE WITH NETATMO

For All Projects Worldwide

Suitable for all common standards

Arteor™ Advance with Netatmo British standard

Mechanism with support.
Order plate separately.



ARTEOR™ Advance with Netatmo International

Support frame, mechanism and plate to be ordered separately.



P. 119

Select the smart functions

Step 1: Zigbee/Wi-Fi Gateway for a smart home

This gateway must be ordered to **start any smart installation**, to create the radio network and the Wi-Fi connection of the smart installation.



Pack control

OR



Mobile control plug

Step 2: Wired products

Add individual smart products to **control** your smart installation.



Smart light switches, smart dimmers, smart curtain/roller blind switches...

Step 3: Wireless products

Add individual smart products to **complete** your smart installation.

With battery

Batteryless: no battery needed



Smart wireless light switches



Smart Wake Up/Sleep wireless batteryless switches

Home + Control

The installation can be managed locally or remotely via one single app or voice assistant.

works with Hey Google

works with alexa

Works with Apple HomeKit

Choose your finishing plates

Smart functions	Design	PLATES																	
		CLASSIC COLLECTION						DECOR COLLECTION					STATEMENT COLLECTION						
		Matt White	Matt Black	Matt Titanium	Champ-agne	Dark Bronze	Rose	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Alu-minium	Solid Champ-agne	Solid Sand	Solid Dark Bronze	Solid Rose
Gateway	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Sockets	-	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Light, curtain/ roller blind, fan switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●										
Wireless switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●										
Wireless Batteryless switches	Square	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	Slender							●	●	●	●	●	●	●	●	●	●	●	●

Arteor™ Advance with Netatmo - British standard - smart gateway

Must be ordered for any smart installation

Step 1: Gateway for a smart home

Home + Control



AC5110MW



1 991 05

Plate selection charts **p. 158-161**

Used to create the radio network and the Wi-Fi connection of the smart installation
Enables remote control of your home (lighting, curtains/roller blinds, fan, temperature and electrical appliances) using a smartphone via the Home + Control app and/or voice control with a voice assistant (Google Assistant, Amazon Alexa, Apple Siri)(1)
Must be ordered to start any smart installation
To be completed by adding individual connected products
2.4 GHz Wi-Fi connection required
Zigbee 3.0 compatible

Pack	Cat.Nos
	Square
1	AC5110MW
1	AC5110MB
1	AC5110MT

Pack control

Mechanisms supplied with cover plates, to be equipped with support frames (p. 137) and plates (p. 138)
Can be installed in place of an existing product
Suitable for flush-mounting box min. depth 35 mm



○ Matt White
● Matt Black
○ Matt Titanium

Pack	Cat.Nos
1	1 991 05

Mobile control plug




The Control plug makes it easy to connect all "with Netatmo" smart solutions and Zigbee 3.00 lighting
It plugs into an existing power socket and simply connects to the Wi-Fi network
Supplied with both British Standard and European plugs
● Black

1: Availability of voice assistants to be checked in your country

Arteor™ Advance with Netatmo - British standard - smart light switches

Step 2: Wired products

Home + Control



AC52100MW



AA52110MW



5 742 43

Plate selection charts **p. 158-161**

Used to create your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible


Smart light switches with neutral, 150 W LED, wired


Compact mechanism for greater wiring space
Mechanisms supplied with cover plates and support frames, to be equipped with plates (p. 158-161)
For local or remote control of lighting
Can be controlled by one or several smart wireless light switches
Compatible with all loads:
- LEDs and CFL lamps: 150 W LED
- Incandescent and halogen lamps: 500 W
- ELV halogen and CFL lamps with separate ballast: 300 VA

Can be installed in place of an existing switch in a flush-mounting box depth 25 mm
Locator and indicator function can be activated from the Home + Control app


Pack	Cat.Nos Square	Cat.Nos Slender
1-gang		
1	AC52100MW	AA52100MW
1	AC52100MB	AA52100MB
1	AC52100MT	AA52100MT
2-gang		
1	AC52102MW	AA52102MW
1	AC52102MB	AA52102MB
1	AC52102MT	AA52102MT
3-gang		
1	AC52110MW	AA52110MW
1	AC52110MB	AA52110MB
1	AC52110MT	AA52110MT


Square / Slender







○ Matt White
● Matt Black
○ Matt Titanium





○ Matt White
● Matt Black
○ Matt Titanium





○ Matt White
● Matt Black
○ Matt Titanium

Pack	Cat.Nos
1	5 742 43

Smart ON/OFF micromodule, wired



Used to connect lights with a ceiling box installation
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
Compatible with all loads:
- LEDs and CFL lamps: 100 W LED
- Incandescent and halogen lamps: 300 W
- ELV halogen and CFL lamps with separate ballast: 250 VA


Arteor™ Advance with Netatmo - British standard

smart light switches with dimmer option

Step 2: Wired products

Home + Control


AA52105MW


AC52104MB


0 648 99

Plate selection charts **p. 158-161**

Used to comple your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible


Smart light switches with dimmer option, wired


Compact mechanism for greater wiring space
Mechanisms supplied with cover plates and support frames, to be equipped with plates (p. 158-161).
For local or remote ON/OFF or dimming control of lighting. Can be controlled by one or several smart wireless light switches or mechanical push-buttons without lamps. Memory level function. Can be installed in place of an existing switch in a flush-mounting box depth 25 mm
Dimmer mode and locator/indicator function can be activated from the Home + Control app

With neutral, 150 W LED, 1-gang

Compatible with all loads:
- Dimmable LEDs and CFL lamps: 150 W LED
- Incandescent and halogen lamps: 150 W
- ELV halogen and CFL lamps with separate ballast: 150 VA

Pack	Cat.Nos Square	Cat.Nos Slender	
1	AC52105MW	AA52105MW	Matt White
1	AC52105MB	AA52105MB	Matt Black
1	AC52105MT	AA52105MT	Matt Titanium


Square



Slender


Without neutral, 5-125 W LED, 1-gang

Compatible with all loads:
- Dimmable LEDs and CFL lamps: 125 W LED 60 VA LED
- Incandescent and halogen lamps: 125 W
- ELV halogen and CFL lamps with separate ballast: 125 VA 300 W

Supplied with a bleeder

Pack	Cat.Nos Square	Cat.Nos Slender	
1	AC52104MW	AA52104MW	Matt White
1	AC52104MB	AA52104MB	Matt Black
1	AC52104MT	AA52104MT	Matt Titanium





Smart micromodule with dimmer option, wired

Used to connect lights with a ceiling box installation
Can be controlled by one or several wireless light switches and/or mechanical push-buttons
For local or remote ON/OFF / dimming control of lighting
Dimmer mode can be activated from the Home + Control app
Memory level function

Pack	Cat.Nos	
1	0 648 99	Compatible with all loads: - Dimmable LEDs and CFL lamps: 150 W LED - Incandescent and halogen lamps: 150 W - ELV halogen and CFL lamps with separate ballast: 150 VA



Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

smart curtain/roller blind switches

Step 2: Wired products

Home + Control


AA5311MW


AC5312MW


0 676 97


0 676 96

Plate selection charts **p. 158-161**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		Smart curtain/roller blind switches with neutral
			Compact mechanism for greater wiring space Mechanisms supplied with cover plates and support frames, to be equipped with plates (p. 158-161) For local or remote control of a 230 V~ roller blind (raise/lower/stop functions and level management) Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds. Can be paired with one or several smart curtain/roller blind wireless switches. Locator function can be activated via the Home + Control app Can be installed in place of an existing roller blind switch in a flush-mounting box depth 25 mm
	Square	Slender	**1-gang - 500 VA**
1	AC5311MW	AA5311MW	Matt White
1	AC5311MB	AA5311MB	Matt Black
1	AC5311MT	AA5311MT	Matt Titanium
			2-gang - 2 x 250 VA
1	AC5312MW	AA5312MW	Matt White
1	AC5312MB	AA5312MB	Matt Black
1	AC5312MT	AA5312MT	Matt Titanium

Pack	Cat.Nos	Smart curtain/roller blind micromodule 500 VA - IP 44
1	0 676 97	For local and remote control of a 230 V~ roller blind (raise/lower/stop functions and level management) Compatible with roller blinds with mechanical or electronic stop, not compatible with radio-controlled roller blinds Can be paired with one or several roller blind wireless switches To be installed in the ceiling box or roller blind box to connect a new or existing roller blind

Pack	Cat.Nos	Smart module for garage door and gate (dry contact)
1	0 676 96	Enables open/close control of a garage door or gate, locally, remotely or via voice assistant (Google Home and Amazon Alexa) Status display (open/closed/level) in the Home + Control app Can be controlled using a curtain/roller blind wireless control (p. 155) or a wireless scene control (e.g. Cat.No 0 676 95 p. 157) Supplied with 2 wired position sensors Can be installed in an IP 55 Plexo box 80 x 80 mm or larger and in parallel with an existing mechanical push-button Fitted with 2 removable fixing points Compatible with any garage door and gate engine equipped with a dry contact entry for mechanical push-button

Arteor™ Advance with Netatmo - British standard

smart socket outlets, smart cable outlet

Step 2: Wired products

Home + Control


AC5410MW


AC5411MT


0 648 89


0 648 79

Plate selection charts **p. 158-161**


Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos	Smart British standard socket outlets, 13 A - 250 V, switched, single pole

Conform to BS 1363-2 and IEC 60669-2-5
Compact mechanism (22 mm deep)
Shuttered for child safety
Protected against overloads
Can be controlled by one or several smart wireless light switches
Remote control via the Home + Control app
Compatible with any electrical appliance or large household appliance
Smart socket outlets allow to:
- remotely control electrical appliances
- measure instantaneous power
- monitor daily and monthly consumption
- send configurable notifications in case of abnormal use (overconsumption, etc.)


Can be installed in place of an existing socket outlet in a flush-mounting box min. depth 35 mm
Indicator LED function can be activated from the Home + Control app

2P+E switched - 1-gang
Mechanisms supplied with cover plates and support frames, to be equipped with plates (see p. 158)



Pack	Cat.Nos	Square/Slender
1	AC5410MW	○ Matt White
1	AC5410MB	● Matt Black
1	AC5410MT	◌ Matt Titanium

2 x 2P+E switched - 2-gang
Mechanisms supplied with cover plates and support frames, to be equipped with plates (see p. 158)



Pack	Cat.Nos	
1	AC5411MW	○ Matt White
1	AC5411MB	● Matt Black
1	AC5411MT	◌ Matt Titanium

Pack	Cat.Nos	Smart mobile socket outlet

Conform to IEC 60884-2-5 and IEC 60669-2-5
To be plugged directly into an existing socket outlet
For control of lights, electrical appliances and large household appliances
Can be controlled by one or several smart wireless light switches
- ON/OFF indicator LED function

Smart mobile socket outlets allow to
- remotely control electrical appliances
- measure instantaneous power
- monitor daily and monthly consumption
- send notifications in case of abnormal use (overconsumption etc.)

Indicator LED function can be activated from the Home + Control app



1	0 648 89	13 A British standard smart mobile socket outlet - 3000 W ● Magnesium

Pack	Cat.Nos	Smart cable outlet

Conform to IEC 60669-2-1
Enables remote control of electrical devices
Wiring compatible with pilot wire
Can be controlled by one or several smart wireless light switches
3000 W max. (protected against overloads)
Functions:
- ON/OFF, pilot wire management
- instantaneous power measurement and daily/ monthly consumption monitoring with configurable sending of notifications (defect, consumption, etc.)

Supplied with mounting support, cover plate and worksite protection
Multi-gang fixing not possible



1	0 648 79	○ White
1	0 648 47	● Black
1	0 648 82	◌ Titanium


Red catalogue numbers: New products

SMART WIRELESS
MULTICOLOUR SWITCHES


CUSTOMIZE
YOUR FAVOURITE ATMOSPHERES



Configure up to **3 lighting moods** on the **Home + Control app** and control the light via your **smartphone** or the **smart wireless multicolour switch.**

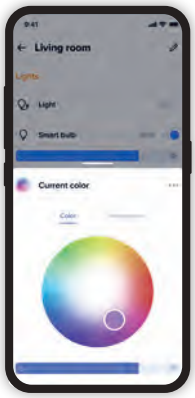


Colour preset

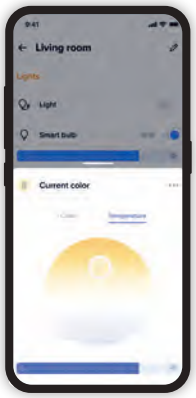

Light intensity preset

Home + Control

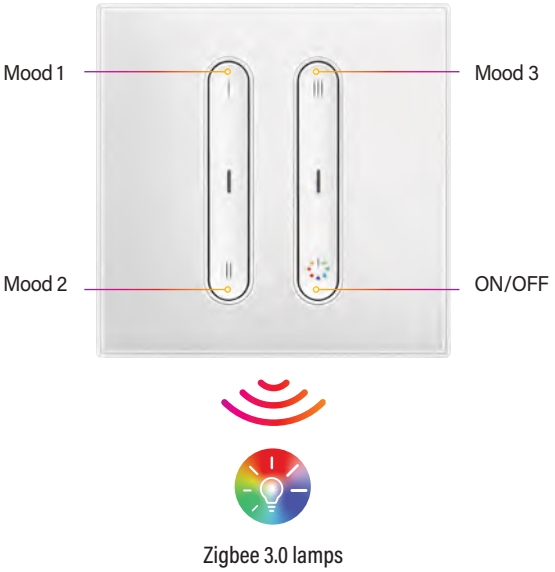

Zigbee 3.0 lamps

To be combined with multicolour Zigbee lighting devices.
Can control up to **20 Zigbee lights with no power limit.**

Arteor™ Advance with Netatmo - British standard

smart wireless switches for multicolour lighting

Step 3: Wireless products

Home + Control



AA5205MW

Plate selection charts **p. 158-161**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible


Pack	Cat.Nos	
	Square	Slender
1	AC5205MW	AA5205MW
1	AC5205MB	AA5205MB
1	AC5205MT	AA5205MT

Smart wireless multicolour switches


Allow to directly control up to 20 Zigbee 3.0 compatible multi-colour lighting (e.g. Ledvance Smart + Zigbee, Philips Hue…) with no limit of power
To be associated with the lighting in the Home + Control app
Allow ON/OFF and dimming control of 3 light moods which have to be preset in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
LED function for low battery indication
Not compatible with Wi-Fi lighting

Surface-mounting version, 1-gang
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

Square



Slender



○ Matt White
● Matt Black
◌ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

smart wireless lights switches

Step 3: Wireless products

Home + Control



AA5201MB



AA5206MW



AA5207MB

Plate selection charts **p. 158-161**



Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Smart wireless light switches

Used to add an extra control for wired switches, micromodules, socket outlets, cable outlets
Easy pairing by tapping the wired product or by using the Home + Control app
Supplied with CR2032 3V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication
Dimmer mode can be actived via the Home + Control app
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

1-gang
Controls up to 20 wired products



Pack	Square	Slender
1	AC5201MW	AA5201MW
1	AC5201MB	AA5201MB
1	AC5201MT	AA5201MT

○ Matt White
● Matt Black
○ Matt Titanium

2-gang
Controls up to 2x20 wired products



Pack	Square	Slender
1	AC5202MW	AA5202MW
1	AC5202MB	AA5202MB
1	AC5202MT	AA5202MT

○ Matt White
● Matt Black
○ Matt Titanium

3-gang
Controls up to 3x20 wired products

Pack	Square	Slender
1	AC5203MW	AA5203MW
1	AC5203MB	AA5203MB
1	AC5203MT	AA5203MT



○ Matt White
● Matt Black
○ Matt Titanium

Smart wireless batteryless light switches

Extra-slim, maintenance-free device without any battery
Used to add an extra control for wired switches, micromodules, socket outlets and cable outlets
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Easy pairing by tapping the wired product (switches, micromodules, socket outlets) or by using the Home + Control app
Dimmer mode can be activated from the Home + Control app
Dimmer mode can be activated from the Home + Control app
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

1-gang
Controls up to 20 wired products



Pack	Square	Slender
1	AC5206MW	AA5206MW
1	AC5206MB	AA5206MB
1	AC5206MT	AA5206MT

○ Matt White
● Matt Black
○ Matt Titanium

2-gang
Controls up to 2x20 wired products

Pack	Square	Slender
1	AC5207MW	AA5207MW
1	AC5207MB	AA5207MB
1	AC5207MT	AA5207MT

○ Matt White
● Matt Black
○ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

smart wireless motion sensor and switch ON/OFF module

Step 3: Wireless products

Home + Control



5 742 52



0 676 94

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos	
1	5 742 52	**Smart wireless motion sensor IP 44** Allows to control up to 20 wired switches, micromodules, socket outlets and cable outlets Easy pairing by tapping the wired products or by using the Home + Control app Supplied with 2 x AA battery For indoor and outdoor use Recommended distance between 2 sensors: 6 m Recommended installation height: 2.5 m Time delay adjustable from 15 s to 15 min Range: 8 m Detection angle: 140° Sensor range adjustable from 2 m to 8 m With ON/OFF test buttons Light level threshold adjustable from 1 to 1000 lux
1	0 676 94	**Smart wireless switch ON/OFF module** Allows to transform a mechanical 2-way switch or push-button into a wireless ON/OFF switch. Small size for easy integration into the wall box To be paired with one smart switch, micromodule, socket outlet Supplied with CR2032 3V long-life battery for power supply

Arteor™ Advance with Netatmo - British standard

smart wireless curtain/roller blind switches

Step 3: Wireless products

Home + Control

green power





AA5302MB


Plate selection charts **p. 158-161**


Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		
			Smart wireless curtain/roller blind switch Used for remote control or centralization of up to 20 wired smart roller blind switches Pair by tapping the selected roller blind switch(es) or by using the Home + Control app Supplied with CR2032 3 V long-life battery for power supply Easy access to the battery for maintenance LED function for low battery indication Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate To be equipped with plates (p. 158-161) **1-gang**
	Square	Slender	
1	AC5301MW	AA5301MW	○ Matt White
1	AC5301MB	AA5301MB	● Matt Black
1	AC5301MT	AA5301MT	○ Matt Titanium
			Smart wireless batteryless curtain/roller blind switch Extra-slim, maintenance-free device without any battery Used for remote control or centralization of up to 20 wired roller blind switches Energy harvesting mechanism that generates by itself the energy required for the switching process Qualified for 1 million cycles Smooth and silent switching Pair by tapping the selected roller blind switch(es) or by using the Home + Control app **2-gang** Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate To be equipped with plates (p. 158-161)
	Square	Slender	
1	AC5302MW	AA5302MW	○ Matt White
1	AC5302MB	AA5302MB	● Matt Black
1	AC5302MT	AA5302MT	○ Matt Titanium









Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

smart wireless scene switches

Step 3: Wireless products

Home + Control


AA5702MW


AC5701MB


AA5708MW


AA5707MW

Plate selection charts **p. 158-161**


Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible


Smart Wake up/Sleep wireless switch

Used to add 2 extra scenes to a smart installation
Preset Wake up/Sleep life scenes which can be customised in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

1-gang

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5702MW	AA5702MW
1	AC5702MB	AA5702MB
1	AC5702MT	AA5702MT


Square


Slender


○ Matt White
● Matt Black
○ Matt Titanium


Smart Home/Away wireless switch

Used to add 2 extra scenes to a smart installation
Home/Away life scenes can be customised in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance
LED function for low battery indication
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

1-gang

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5701MW	AA5701MW
1	AC5701MB	AA5701MB
1	AC5701MT	AA5701MT


Square


Slender

○ Matt White
● Matt Black
○ Matt Titanium


Smart Wake Up/Sleep wireless batteryless switch


Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Preset Wake up/Sleep life scenes which can be customised in the Home + Control app

1-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5708MW	AA5708MW
1	AC5708MB	AA5708MB
1	AC5708MT	AA5708MT


Square


Slender

○ Matt White
● Matt Black
○ Matt Titanium


Smart Home/Away wireless batteryless switch


Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Home/Away life scenes can be customised in the Home + Control app

1-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

Pack	Cat.Nos Square	Cat.Nos Slender
1	AC5707MW	AA5707MW
1	AC5707MB	AA5707MB
1	AC5707MT	AA5707MT


Square


Slender

○ Matt White
● Matt Black
○ Matt Titanium

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

smart wireless scene switches (continued), accessories

Step 3: Wireless products

Home + Control



AC5700MW



0 676 95



AA5705MB

Plate selection charts **p. 158-161**

Used to complete your smart installation, require prior installation of a gateway for smart installation
Zigbee 3.0 compatible

Pack	Cat.Nos		
	Square	Slender	
1	AC5700MW	AA5700MW	Matt White
1	AC5700MB	AA5700MB	Matt Black
1	AC5700MT	AA5700MT	Matt Titanium
1	0 676 95		Pocket remote control


Smart 4 scenes wireless switches

Used to add 4 customised scenes to a smart installation
Scenes can be customised in the Home + Control app
Possibility to assign personalized names and to associate icons to the scenes in the Home + Control app
Supplied with CR2032 3 V long-life battery for power supply
Easy access to the battery for maintenance


2-gang

LED function for low battery indication
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

Square



Slender



○ Matt White
● Matt Black
○ Matt Titanium

Pocket remote control



Can be attached to a keyring
● Magnesium

Pack	Cat.Nos		
	Square	Slender	
1	AC5705MW	AA5705MW	Matt White
1	AC5705MB	AA5705MB	Matt Black
1	AC5705MT	AA5705MT	Matt Titanium
1	0 648 71		Accessory


Smart 4 scenes wireless batteryless switch

Extra-slim, maintenance-free device without any battery
Used to add 4 customised scenes to a smart installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Scenes can be customised in the Home + Control app
Possibility to assign personalized names and to associate icons to the scenes in the Home + Control app


2-gang

Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with plates (p. 158-161)

Square



Slender



○ Matt White
● Matt Black
○ Matt Titanium





Accessory

Pack of 3 x 4 extra removable stickers for fixing a wireless control

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

British standard plate selection charts

Number of switches	Flush-mounting boxes	Support frames	Plates	PLATES – Classic Collection: Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
Wired 1-gang	1-gang	Not needed		AC1102MW	AC1102MB	AC1102MT	AC1102CH	AC1102DB	AC1102RS
Wired 2-gang									
Wired 3-gang									
Surface-mounting Wireless switches 1-gang	Fixing possible on existing box with 60.3 mm fixing centre		 (1)						
Surface-mounting Wireless switches 2-gang									
Surface-mounting Wireless switches 3-gang									
Surface-mounting Wireless Batteryless switches 1-gang									
Surface-mounting Wireless Batteryless switches 2-gang									
SLENDER VERSION									
Wired 1-gang	1-gang	Not needed		-	-	-	-	-	-
Wired 2-gang				-	-	-	-	-	-
Wired 3-gang				-	-	-	-	-	-
Surface-mounting Wireless switches 1-gang	Fixing possible on existing box with 60.3 mm fixing centre		 (1)	-	-	-	-	-	-
Surface-mounting Wireless switches 2-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless switches 3-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless Batteryless switches 1-gang			 (1)	-	-	-	-	-	-
Surface-mounting Wireless Batteryless switches 2-gang									
FOR BRITISH STANDARD SMART SOCKET OUTLETS									
1-gang	1-gang	Not needed		AC1104MW	AC1104MB	AC1104MT	AC1104CH	AC1104DB	AC1104RS
2-gang	2-gang			AC1112MW	AC1112MB	AC1112MT	AC1112CH	AC1112DB	AC1112RS

1: Fins to be removed from the support frame for mounting in BS plates


Red catalogue numbers: New products

	PLATES											
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1102FW	AC1102FB	AC1102BS	AC1102AB	AC1102BB	AC1102NB	AC1102SB	AC1102SA	AC1102SC	AC1102SD	AC1102SZ	AC1102SR
	AA1104FW	AA1104FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-
	AA1119FW	AA1119FB	-	-	-	-	-	-	-	-	-	-
	AA1104FW	AA1104FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-
	AA1119FW	AA1119FB	-	-	-	-	-	-	-	-	-	-
	AA1105FW	AA1105FB	-	-	-	-	-	-	-	-	-	-
	AC1104FW	AC1104FB	AC1104BS	AC1104AB	AC1104BB	AC1104NB	AC1104SB	AC1104SA	AC1104SC	AC1104SD	AC1104SZ	AC1104SR
	AC1112FW	AC1112FB	AC1112BS	AC1112AB	AC1112BB	AC1112NB	AC1112SB	AC1112SA	AC1112SC	AC1112SD	AC1112SZ	AC1112SR

Red catalogue numbers: New products

Arteor™ Advance with Netatmo - British standard

Italian/US standard plate selection charts

Number of switches	Flush-mounting boxes	Support frames	Plates	PLATES					
				Classic Collection					
				Matt White	Matt Black	Matt Titanium	Champagne	Dark Bronze	Rose
SQUARE VERSION									
Surface-mounting Wireless switches 1-gang	Fixing possible on existing box with 60.3 mm fixing centre	Not needed		AC1103MW	AC1103MB	AC1103MT	-	-	-
Surface-mounting Wireless switches 2-gang									
Surface-mounting Wireless switches 3-gang									
Surface-mounting Wireless Batteryless switches 1-gang									
Surface-mounting Wireless Batteryless switches 2-gang									


Red catalogue numbers: New products

	PLATES											
	Decor Collection					Statement Collection						
	Frosted White	Frosted Black	Brushed Stainless Steel	Brushed Antique Brass	Brushed Bronze	Midnight Blue	Solid Black	Solid Aluminium	Solid Champagne	Solid Sand	Solid Dark Bronze	Solid Rose
	AC1103FW	AC1103FB	AC1103BS	-	-	AC1103NB	-	AC1103SA	-	-	-	-

MYHOME
Becomes even smarter


Dedicated apps for the installer...



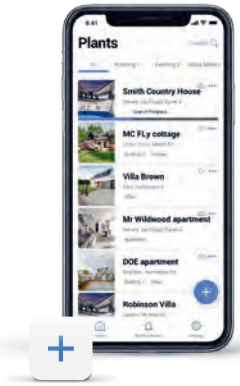

Home + Project
Design and configure the system.

...and your customer

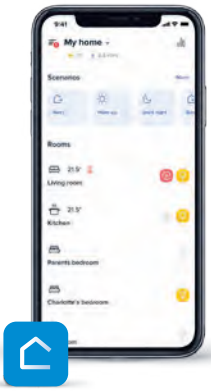

Home + Control
Manage all the home functions.




Home + Security
Control the video door entry system and Netatmo products.

Free to choose the server you prefer for configuration and management of MyHOME system

DIN Server BT-F460


For new villas or bigger installations where VDE is not required in combination with HOMETOUCH as internal unit.

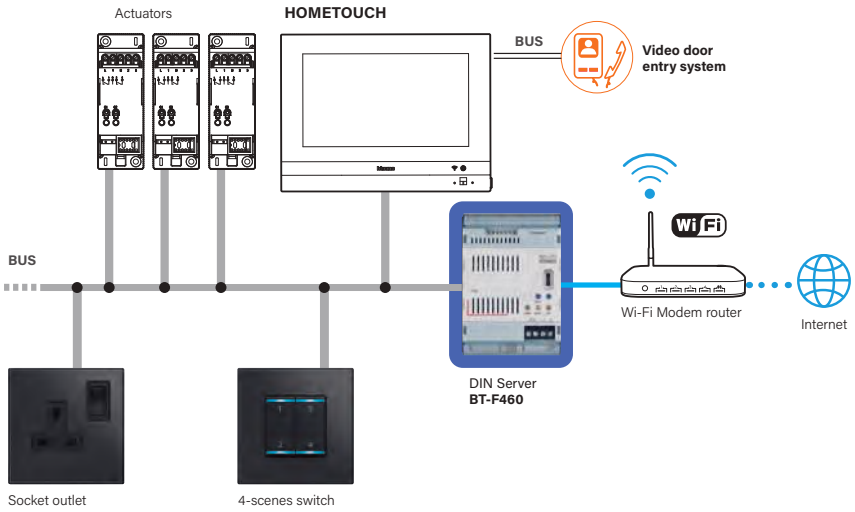

OR

Classe 300EOS with Netatmo

An alternative to DIN server BT-F460 in the case of new installations for real estate projects and apartments where the integration of the video door entry system is required.

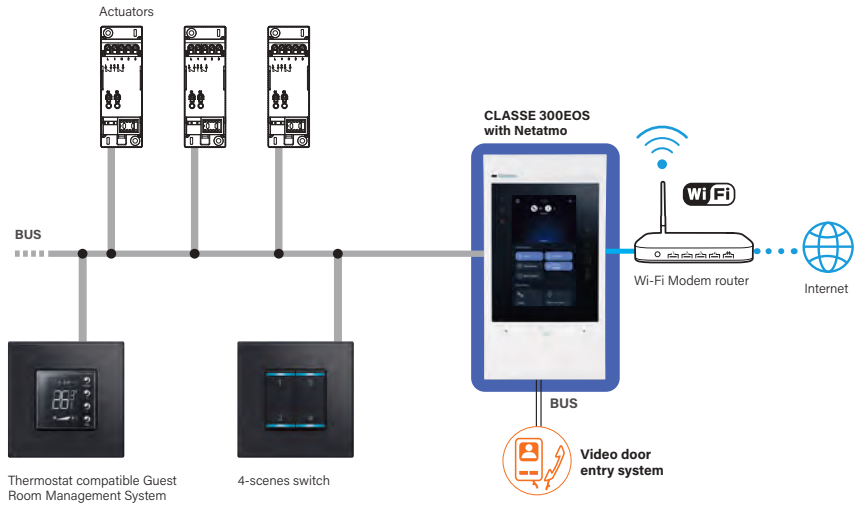

MyHOME

SCS BUS system management


BT-344842


BT-346020


BT-F460


BT-F461

Home + Control

Home + Security

Home + Project

Pack	Cat.Nos	Servers
		Classe 300EOS with Netatmo connected video internal unit
		Wi-Fi hands-free connected video internal unit for 2-wire BUS installation Amazon Alexa voice assistant built-in Integrated gateway function for management of a MyHOME installation • Control options: - Local control - Remote management and control via the Home + Control and Home + Security apps - Voice control - Amazon Alexa built-in voice assistant • Features: - Vertical 5” touchscreen LCD display - Answering machine, with or without inductive loop - Physical keys for door lock release - Capacitive keys for the control of the main video door entry functions (hands-free communication, entrance panel activation, camera scrolling and Favourite key - Possibility to interact with built-in Alexa voice assistant via dedicated capacitive keys or voice for activation of video door entry and Smart Home functions, routines, reminders etc. - touch display allows for easy access of the notification list, favourite door entry, security and Smart Home controls • Functions available through the Home + Security app: - Call redirection to a smartphone - Management of the main video internal unit functions (receiving calls, door lock release, display of the event timeline and activation of the entrance panel/camera cycling) - Management of the Netatmo security solutions for easy set-up of a Smart security system • Functions available through the Home + Control app: - Management of all the “with Netatmo” and MyHOME functions. Surface-mounting installation using the bracket supplied Possibility of Wi-Fi connection or using RJ 45 ethernet cable Cat.No BT-344844
1	BT-344842	○ White
1	BT-344884	● Black
		Ethernet cable
1	BT-344844	Accessory cable for the wired connection of the Classe 300EOS video internal unit using an RJ 45 Ethernet cable. To be purchased separately
		Power supply
1	BT-346020	Additional power supply To be used to supply the connected Classe 300EOS video internal unit (BT-344842) locally, when required 2 DIN modules

Pack	Cat.Nos	Servers (continued)
		DIN SCS Server To interact with the MyHOME system Compact product for optimised installation in cabinets Natively comprises the capability of humidity management and supports natively 175 addresses with the possibility of extention by adding max 2 interfaces SCS Cat.No BT-F422A (p. 164) The Server is suitable for: • devices association during system start-up by the installer in Home + Project app • for local and remote management of the functions by the user with the Home + Control app (for Android and iOS smartphones) and voice control Voice assistants (Alexa and Google) to manage the MyHome System or third-party devices (e.g. Interact with lamps such as Philips Hue, Lifx,...) The server can be combined with a physical interface used as VDE internal unit and touchscreen to control the installation (HOMETOUCH)
1	BT-F460	4 DIN modules
		Server third-party integration Dedicated version open to third parties Supports the use and integration of third-party systems With native protocol for local integration into third-party systems, for advanced home automation systems such as RTI, Crestron, Control4, Savant Uses the third-party app for users Cannot be used on the same installation with BT-F460
1	BT-F461	4 DIN modules
		HOMETOUCH 7"
		HOMETOUCH Connected 2 wire hands-free video internal unit integrated with MyHOME system Allows to: - manage video door entry functions and connect Door Entry app (available for Android and iOS) - visualize the status and control MyHOME system and integrated functions (light, automation, temperature, scenarios, etc.) Flush-mounting installation using the dedicated box Cat.No BT-3487 Installation also possible in existing wall-mounting boxes Does not require dedicated configuration tools
1	0 672 59	● Black
1	BT-3488W	○ White
		Accessories
1	BT-3487	Flush-mounting box for 7" touch screen Cat.No 0 672 59
1	BT-3487AP	Plasterboard bracket

Red catalogue numbers: New products


MX5222


MX5230


0 675 92

Key cover selection charts **p. 165**

Pack	Cat.Nos	
1	MX5222	**Control device 2 modules** Based on the selected configuration, control for the management of up to: - 4 lights ON/OFF functions and adjustment of a dimmer load - 2 Shutter UP/DOWN and advanced functions - 4 Scenarios and load & force control - VDE control call to the floor, staircase light switching on and door lock activation functions 2 modules To be equipped with 1 or 2 modules key covers (p. 165), support frames and plates (p. 108, 116)
1	MX5223	**Control device 3 modules** Based on the selected configuration, control for the management of up to: - 6 lights ON/OFF functions and adjustment of a dimmer load - 3 Shutter UP/DOWN and advanced functions - 6 Scenarios and load control and force control - VDE control call to the floor, staircase light switching on and door lock activation functions 3 modules To be equipped with 3 modules key covers (p. 165), support frames and plates (p. 108, 116)
1	MX5230	**Actuator/control for lights** Actuator/control with 2 independent relays for single or double loads: the device can be also configured to manage a remote actuator with the same function as Cat.No MX5222 2 modules To be equipped with 1 or 2 modules key covers (p. 165), support frames and plates (p. 108, 116)

Pack	Cat.Nos	
1	MX5220	**Actuator/control for shutter** Shutter actuator with internal relay In addition to the monostable and bistable UP/DOWN function, the actuator also places the rolling shutter in a stored (PRESET) position The device can also be configured to manage a remote actuator 2 modules To be equipped with 1 or 2 modules key covers (p. 165), support frames and plates (p. 108, 116)
1	0 675 92	**Scenario controller** 8 push-buttons control for lighting, automation, sound diffusion and scenario functions For controlling a number of controllers and managing 4 scenarios 2 modules Equipped with cover plates Supplied complete with scenario identification label To be equipped with support frames and plates (p. 108, 116)

MyHOME

BUS key cover selection charts



AC13509MW



AC13514MB


AC13521MW


AC13511MB


AC13513MW


AC13502MB

Compatible with all Arteor Advance control mechanisms (p. 164)

Key cover description	Pack	Number of modules	SQUARE VERSION		
				Matt White ○	Matt Black ●
Regulation symbol	5	1		AC13509MW	AC13509MB
Regulation symbol	5	2		AC13508MW	AC13508MB
Dimmer symbol - 1 function	5	1		AC13521MW	AC13521MB
Dimmer symbol - 1 function	5	2		AC13520MW	AC13520MB
Up/Down symbol	5	1		AC13519MW	AC13519MB
Up/Down symbol	5	2		AC13518MW	AC13518MB
ON/OFF marking	5	1		AC13515MW	AC13515MB
ON/OFF marking	5	2		AC13514MW	AC13514MB
Shutter STOP marking	5	1		AC13517MW	AC13517MB
Without marking - 2 functions	5	1		AC13501MW	AC13501MB
Without marking - 2 functions	5	2		AC13500MW	AC13500MB
Home/Away marking	5	1		AC13511MW	AC13511MB
Home/Away marking	5	2		AC13510MW	AC13510MB
Day/Night marking	5	1		AC13513MW	AC13513MB
Day/Night marking	5	2		AC13512MW	AC13512MB
Dimmer marking - 2 functions	5	1		AC13503MW	AC13503MB
Dimmer marking - 2 functions	5	2		AC13502MW	AC13502MB
Scenes marking 1 - 2	5	1		AC13505MW	AC13505MB
Scenes marking 3 - 4	5	1		AC13507MW	AC13507MB

Red catalogue numbers: New products

MyHOME

BUS modular equipment for lighting control automation and shutter control


BT-F411U2


BT-F411/4


BT-F429G


BT-BMSW1003

Load selection charts **p. 167**

Multi-application DIN controllers

Pack	Cat.Nos	
		NO contact For lighting and motors 2 DIN modules 17.5 mm
1	BT-F411U2	2 outputs 10 A with neutral connection
1	BT-F411/4	4 output 6 A - common phase
1	BT-F411/1NC	Controller with 1 NO/NC relay For lighting: 16 A resistive, 10 A incandescent lamps, 4 A cos φ 0.5 for ferromagnetic transformers and 4 A for fluorescent lamps with 2 DIN modules

DIN controllers for dimming

For use in conjunction with loads and control mechanisms (p. 167) for dimming control

		For dimmable LEDs and CFL (Compact Fluorescent Lamps), incandescent, halogen lamps and electronic transformers
1	BT-F418U2	2 outputs - loads with separate channels: 1-300 VA / 230 V or 1-150 VA / 110 V - loads with parallelized channels: 2-600 VA / 230 V or 2-300 VA / 110 V
		For 1-10 V ballasts
1	BT-F413N	500 VA maximum 2 DIN modules 17.5 mm
		DALI-2 gateway
1	BT-F429G	Interface between MyHOME/Lighting Management systems and devices driven using the DALI protocol Can be installed in a MyHOME system through Home + Project app Suitable in installation with all DALI-2 lamps 1 independent output to manage up to 64 ballast DALI-2 Management: ON/OFF, dimmer, RGB, RGBW with tunable white and fade in-out 6 DIN modules
		DALI-2 dimmer
1	BT-F429D	Interface between MyHOME/Lighting Management systems and devices driven using the DALI protocol Can be installed in a MyHOME system through Home + Project app Suitable in installation with few DALI-2 lamps 2 independent outputs to manage up to 32 ballast DALI-2 (2 groups of 16 lamps) Management: ON/OFF, dimmer, RGB, RGBW with Tunable White and fade in-out 4 DIN modules
		For incandescent, halogen 230 V, ELV halogen with electronic or ferromagnatic transformer
1	BT-F416U1	Automatic recognition of the load 1 output - 1000 W maximum 6 DIN modules 17.5 mm

DIN ON/OFF lighting controllers

Pack	Cat.Nos	
		For lighting (commercial sector)
1	BT-BMSW1003	4 outputs 16 A 6 DIN modules 17.5 mm
1	BT-BMSW1005	8 outputs 16 A 10 DIN modules 17.5 mm

2-relay controller for driving a motor

1	BT-F401	Relay interlocking or pulse based motor drive Position status return: closed, open, intermediate position. Drive following different orders: up, down, or opening Maximum motor power: 460 W, 230 V~ Logic relay interlocking 2 DIN modules 17.5 mm

RJ adaptor

10	0 488 72	For connecting Cat.Nos BT-BMSW1003, BT-BMSW1005, BT-F416U1, BT-BMDI1002 to the BUS Male connector

Contact interfaces




		Allow the connection between traditional wiring devices such as switches, time delay switches or external sensors 2 independent contacts
1	BT-F428	2 DIN modules 17.5 mm
1	BT-3477	Basic modularity to be installed in flush-mounting box

Basic module controller

1	BT-3476	For lighting: 2 A resistive or incandescent lamps and 2 A cos φ 0.5 for ferromagnetic transformers Controller/control unit with 1 relay with an input for conventional push-button with NO contact

Red catalogue numbers: New products

Loads that can be driven (110 V~ - max. 250 V~ 50/60 Hz)

Cat.Nos		 Energy saving incandescent and halogen lamps	 LED lamps	 Linear fluorescent lamps	 Compact fluorescent lamps	 Electronic transformers	 Ferromagnetic transformers	 Reducer motors for shutters
BT-BMSW1005	250 V~	-	-	4.3 A 10 x 2 x 36 W	5 A 1150 VA	16 A 3680 W	16 A 3680 W	-
	110 V~	-	-	4.3 A 5 x (2 x 36 W)	5 A 550 VA	16 A 1760 W	16 A 1760 W	-
BT-BMSW1003	250 V~			10x(2x36 W) 4.3 A	1150 W 5 A	16 A 3680 W	16 A 3680 W	-
	110 V~			10x(2x36 W) 4.3 A	550 W 5 A	16 A 1760 W	16 A 1760 W	-
BT-F411U2	250 V~	-	-	4 A 920 W	500 W	920 W	4 A Cos Φ 0.5 920 VA	2 A 460 W
	110 V~	-	-	4A 440W	250W	440W	4A Cos Φ 0.5 440 VA	2A 250W
BT-3476	250 V~	2 A 460 W	40 W Max. 1 lamp	-	40 W Max. 1 lamp	-	2A Cos Φ 0.5 460 VA	-
	110 V~	2 A 220 W	20 W Max. 1 lamp	-	20 W Max. 1 lamp	-	2 A Cos Φ 0.5 220 VA	-
BT-F401	250 V~	-	-	-	-	-	-	2 A 250 W
	110 V~	-	-	-	-	-	-	2 A 220 W
BT-F411/1NC	250 V~	10 A 2300 W	500 W Max. 10 lamps	4 A 920 W	500 W Max. 10 lamps	4 A 920 W	4 A Cos Φ 0.5 920 VA	-
	110 V~	10 A 2300 W	220 W Max. 10 lamps	4 A 440 W	220 W Max. 10 lamps	4 A 440 W	4 A Cos Φ 0.5 440 VA	-
BT-F411/4	250 V~	2 A 460 W	70 W Max. 2 lamps	0.3 A 70 W	70 W Max. 2 lamps	0.3 A 70 W	2 A Cos Φ 0.5 460 VA	2 A 460 W
	110 V~	2 A 220 W	35 W Max. 2 lamps	0.3 A 35 W	35 W Max. 2 lamps	0.3 A 35 W	2 A Cos Φ 0.5 220 VA	2 A 220 W
BT-BMDI1002	250 V~	Dimmer for ballast 4x4.3 A outputs - 4x1000VA						
	110 V~	Dimmer for ballast 4x4.3 A outputs - 4x500 VA						
BT-F418U2	250 V~	2x300 W	2x300 VA	-	2x300 VA	2x300 VA	2x300 VA	-
	110 V~	2x150 W	2x150 VA	-	2x150 VA	2x150 VA	2x150 VA	-
BT-F416U1	250 V~	4.3 A 40-1000 W	-	-	-	4.3 A 40-1000 W	4.3 A 40-1000 W	-
	110 V~	4.3 A 500 W	-	-	-	4.3 A 500 W	4.3 A 500 W	-
BT-F413N	250 V~	-	-	2 A max 10 ballast 460 W	-	-	-	-
	110 V~	-	-	2 A max 10 ballast 220 W	-	-	-	-
0 675 57	110 V~	-	-	-	-	-	-	1x230 W
BT-F429D	-	SCS/DALI2 dimmer - up to 32 ballast DALI2						
BT-F429G	-	SCS/DALI2 gateway - up to 64 ballast DALI2						


BT-3522N


BT-F520


BT-3508BUS


BT-F522

Pack	Cat.Nos	Consumption indicators
1	BT-3522N	**Pulse counter interface** Used to store data from a pulse counter (water, colorimetry, heat or gas) In countries subject to the ATEX Directive it's mandatory to use a zener barrier/galvanic insulation barrier between the pulse counter interface and the gas meter The barrier must comply with the ATEX directive and must be installed outside the ATEX zone Install one pulse counter interface per meter to measure the consumption individually Consumption data stored hour by hour, and kept for several years (12 years) Display can be in the form of histograms or statistical data
1	BT-F520	**Consumption indicator for 3 circuits** Integration in Home + Project for configuration and Home + Control for the end user usage For single phase installations Supplied with a toroid and its link Each toroid can monitor one circuit The consumption indicator can take up to 3 toroids, for monitoring 3 separate circuits Several consumption indicators can be installed to monitor more than 3 circuits on the installation Instantaneous and cumulative display of the consumption for each circuit and display of consumption on touch screens Display can be in the form of histograms or statistical data Consumption data can be stored for 1 year, hour by hour, 2 years day by day or 12 years month by month
1	BT-3523	**Additional toroid** Operates with consumption indicator Cat.No 0 035 55 Also operates with controller Cat.No BT-F522 for load diagnostics 90 A max. Cable cross-section 25 mm² max.
		Connectors
10 10 10	BT-3508BUS BT-3508U2 BT-3508U3	Spare parts for consumption indicator Cat.No BT-F520 and controllers Cat.Nos BT-F521, BT-F523 and BT-F522 BUS connector, depth 3.81 mm 2-pole connector 3-pole connector

Pack	Cat.Nos	Load shedding management
		Integration in Home + Project for configuration and Home + Control for the end user usage
1	BT-F521	**Central control unit** Used to define an energy threshold and manage load shedding priorities set on controllers to avoid unwanted interruptions as a result of exceeding the energy contract Manages up to 63 controllers The max. authorised power threshold can be defined The settings can be activated/deactivated on the touch screen Instantaneous and cumulative display of circuit consumption on the touch screen Integrated memory module For installation in the consumer unit 1 DIN module 17.5 mm
1	BT-F523	**16 A controller** Used to define a priority level for a circuit in the context of a load shedding function For installation in the electrical panel 1 DIN module 17.5 mm Can be used as an electronic control box controller and/or an energy management controller
1	BT-F522	**16 A controller with consumption measurement** Used to define a priority level for a circuit in the context of a load shedding function For installation in the electrical panel 1 DIN module 17.5 mm Can be used as an electronic control box controller and/or an energy management controller Measures the consumption of the load being controlled and displays instantaneous and cumulative consumption with separate reset Diagnostics of the load being controlled with use of toroid Cat.No BT-3523

MyHOME

BUS sensors



AC5220MW

Check presence and light level continuously, switch off when there is sufficient natural light
Automatic switch-on/off (factory setting)
Connect to controllers by cord or RJ 45 cable or BUS/SCS cable to be fitted with RJ 45 connector Cat.No 0 488 72

Pack	Cat.Nos	180° dual technology presence sensor
		Automatic sensors with integrated push-button Dual technology passive IR and ultrasonic presence sensor Light sensor Range 8 m for an installation height of 1.2 m Time delay before switch-off and adjustable light level 2 modules IP 41 Consumption 0.5 W on standby To be equipped with support frames and plates (p. 108, 116)
	Square	**Dual technology presence sensor**
1	AC5220MW	○ Matt White
1	AC5220MB	● Matt Black

MyHOME

BUS temperature control



0 674 59



BT-3454

Pack	Cat.Nos	Display thermostat
1	0 674 59	Flush-mounted thermostat with backlit display To be equipped with support frames and plates (p. 108, 116) Can be used to control the temperature of an individual zone, with or without a temperature central unit Features a temperature probe and an input for the connection of a contact line (e.g. window contact) Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules
		Temperature probe
1	BT-3454	Temperature interface with input for external sensors Can work as master and slave probe Compatible with external temperature sensors Cat.No BT-3457 and Vantage VT-FLUSHSENSOR
		DIN rail actuators 100/240 V∿ - 50/60 Hz
1	BT-F430/2	**Actuator with 2 independent relays** For single and double loads: 6 A resistive, 3 A motorised valves and pumps 2 DIN modules 17.5 mm
1	BT-F430/4	**Actuator with 4 independent relays** For single, double or mixed loads: 6 A resistive, 3 A motorised valves, pumps and fan-coils 2 DIN modules 17.5 mm
		DIN actuators for the control of ON/OFF valves, motorised valves, pumps and fan coils with 0-10 V proportional valves
1	BT-F430R8	Actuator with 8 independent relays for the control of on-off valves, motorised valves (open-close and three-point valves), pumps and fan coils with 2 and 4 tubes 4 A resistive, 1 A motorised valves, pumps and fan coils 4 DIN modules 17.5 mm
1	BT-F430R3V10	Actuator with 3 independent relays and 2 x 0-10 Volt outputs for the control of fan coils with 2 and 4 tubes with 0-10 Volt proportional valves 4 A resistive, 1 A fan coils 4 DIN modules 17.5 mm
1	BT-F430V10	Actuator with 2 x 0-10 Volt outputs for the control of 0-10 V proportional valves 2 DIN modules 17.5 mm

MyHOME

BUS common accessories



BT-E56



BT-F425



BT-F422

Pack	Cat.Nos	BUS power supplies
1	BT-E56	Power supply for automation system Rated voltage 110-240 V~ 50/60 Hz Rated current 730-400 mA Output 28.5 V⎓ 1.2 A max. 6 modules
1	BT-E49	**27 V⎓ - 0.6 A** Maximum current supplied: 0.6 A 2 DIN modules 17.5 mm Input voltage: 230 V~ - output voltage 27 V⎓
1	BT-346020	**Additional power supply** Provides power for Webserver 2 DIN modules 17.5 mm
		BUS/SCS cables
		Conform to IEC 45-5 and IEC 20-20 Grey
1	BT-L4669	Length 100 m
1	BT-L4669/500	Length 500 m
1	BT-L4669KM1	Length 1000 m Supplied on wooden reels
		BUS spare clamp
10	BT-3515	Used to connect the various system components (controls, dimmers, etc) to the BUS line Male connector
		USB cable
1	BT-3559	Programming cable
		Additional DIN devices
1	BT-F425	**Memory module for actuators** Restores the last state of an actuator in case of a power failure 2 DIN modules 17.5 mm
1	BT-F422	**Interface between SCS system (extension)** Interface between SCS BUS based systems, dedicated to different functions - 2 lowered DIN modules 17,5 mm
1	BT-F422A	**Address extension interface SCS** Interface between SCS BUS based systems, dedicated to the logic expansion of the address extension Allows to overcome the limit of 175 addresses and configure huge installations with up to 525 addresses Can be used with both DIN server BT-F460 and Classe300EOS with Netatmo Can add 175 addresses, with a maximum of interfaces allowed for installation: • for BT-F460: 2 max • for Classe300EOS with Netatmo: 1 max Automatic assignment 2 DIN modules 17.5 mm

Other devices



BT-3501/AUX



BT-3501/CEN

Pack	Cat.Nos	Plug-in jumpers
		Jumpers Used to associate an address with the different system components
1	BT-3501/0	0
1	BT-3501/1	1
1	BT-3501/2	2
1	BT-3501/3	3
1	BT-3501/4	4
1	BT-3501/5	5
1	BT-3501/6	6
1	BT-3501/7	7
1	BT-3501/8	8
1	BT-3501/9	9
1	BT-3501/GEN	GEN
1	BT-3501/GR	GR
1	BT-3501/AMB	AMB
1	BT-3501/AUX	AUX
1	BT-3501/ON	ON
1	BT-3501/OFF	OFF
1	BT-3501/OI	O/I
1	BT-3501/PUL	PUL
1	BT-3501/SLA	SLA
1	BT-3501/CEN	CEN
1	BT-3501/T	↑↓
1	BT-3501/TM	↑↓M
1	BT-3501K/1	Kit with: AUX, GEN, GR, AMB, ON, OFF, O/I, PUL, SLA,CEN, ↑↓, ↑↓M (10 pieces of each figure)
1	BT-3501K	Kit with "0 to 9" jumpers (10 of each number)
		Plier
1	BT-3502	Plier for plug-in jumpers

Red catalogue numbers: New products

Combine visionary design with KNX performance

Arteor Advance | KNX




Arteor Advance KNX mechanism 0 675 71

Key covers


Plate

Connected controls for the Home and Building automation, which communicate via KNX standard Bus

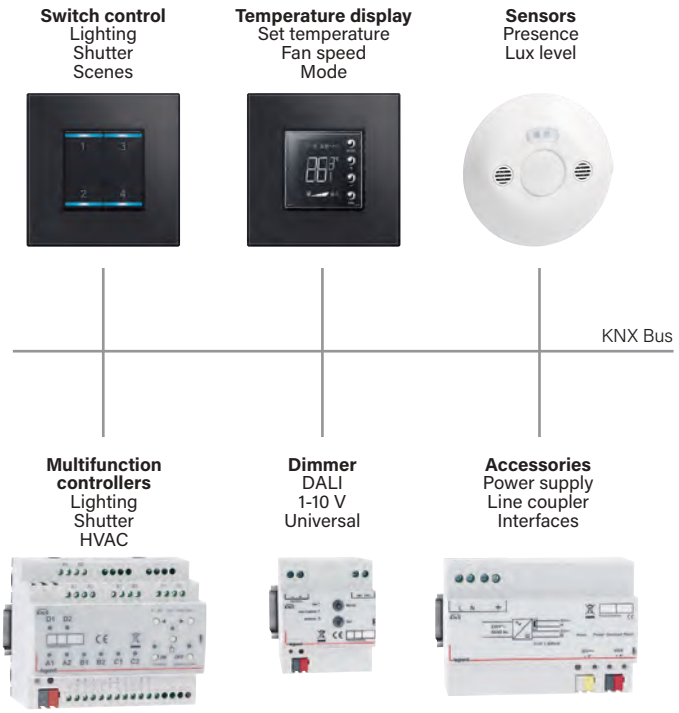

ETS software - one common configuration tool for KNX integrators





Arteor™ Advance KNX

KNX manual control units, KNX thermoregulation

KNX certified



0 675 71 | 0 029 00 | 0 029 01 | 0 674 64

Pack	Cat.Nos	
		Arteor Advance wired control units
1	0 675 71	Connected directly to KNX cable (supplied with tap-off connector) The control unit must be programmed using ETS software Used to control lighting (ON/OFF, dimming, scenario, forcing), roller shutters (raise, lower, stop), awnings, and other receivers Fitted with programmable RGB LEDs (12 colours available) for displaying load status and system status feedback (normal, forced, override, day/night pilot light, etc.), alarms **4 channels control unit - 2 buttons** To be equipped with support frames, plates (see p. 108, 116) and Arteor Advance BUS key covers (see p. 172)
		Touch screen control units
1	0 029 00	Connected directly to KNX cable (supplied with tap-off connector) The control unit must be programmed using ETS software With built-in temperature & proximity sensor Max. 16 timings, 8 group events, 8 logic functions To be installed in a flush-mounting box 4" touch screen 9 control pages including switch, dimming, RGB, shutters, scene, HVAC and audio control, and energy metering
1	0 029 01	5" touch screen 15 control pages including switch, dimming, RGB, shutters, scene, HVAC and audio control, and energy metering
		Display thermostat
1	0 674 64	Arteor Advance control panel Flush-mounted 1.6" backlight display with embedded temperature probe Used to manage different types of heating/cooling system (FCU, heating/cooling valve, fan, electric load…) in combination through KNX with dedicated HVAC controller Cat.No 0 028 90 Monitoring of the ambient temperature Adjustment of the temperature set-point and/or fan speed Selection of operating mode (comfort, eco, protection, OFF) To be installed in a flush-mounting box 2 modules To be equipped with support frames and plates (see p. 108, 116)
		Modular fan coil controller
1	0 028 90	To control fan coil 2-4 pipes (with 0-10 V or ON-OFF valve and fan speed) or valves 2 x 0-10 V output 5 x 10 A outputs 1 input for PT1000 temperature sensor 4 DIN modules

Red catalogue numbers: New products

KNX

BUS key cover selection charts



AC13509MW



AC13514MB


AC13521MW


AC13511MB


AC13513MW


AC13502MB

Compatible with Arteor Advance KNX control mechanisms (p. 171) and with Arteor Advance MyHOME control mechanisms (p. 164)

Key cover description	Pack	Number of modules	SQUARE VERSION		
				Matt White ○	Matt Black ●
Regulation symbol	5	1		AC13509MW	AC13509MB
Regulation symbol	5	2		AC13508MW	AC13508MB
Dimmer symbol - 1 function	5	1		AC13521MW	AC13521MB
Dimmer symbol - 1 function	5	2		AC13520MW	AC13520MB
Up/Down symbol	5	1		AC13519MW	AC13519MB
Up/Down symbol	5	2		AC13518MW	AC13518MB
ON/OFF marking	5	1		AC13515MW	AC13515MB
ON/OFF marking	5	2		AC13514MW	AC13514MB
Shutter STOP marking	5	1		AC13517MW	AC13517MB
Without marking - 2 functions	5	1		AC13501MW	AC13501MB
Without marking - 2 functions	5	2		AC13500MW	AC13500MB
Home/Away marking	5	1		AC13511MW	AC13511MB
Home/Away marking	5	2		AC13510MW	AC13510MB
Day/Night marking	5	1		AC13513MW	AC13513MB
Day/Night marking	5	2		AC13512MW	AC13512MB
Dimmer marking - 2 functions	5	1		AC13503MW	AC13503MB
Dimmer marking - 2 functions	5	2		AC13502MW	AC13502MB
Scenes marking 1 - 2	5	1		AC13505MW	AC13505MB
Scenes marking 3 - 4	5	1		AC13507MW	AC13507MB

Red catalogue numbers: New products

KNX building automation

KNX sensors

KNX certified



0 489 18



0 489 19



0 489 21

Constantly check for presence and light levels, switching OFF as soon as the natural light level is sufficient.
Switch ON and OFF automatically
Accurate set-up on site with configuration device
Connected directly to KNX cable (supplied with tap-off connector)
The detector must be programmed using ETS software

Special presence sensors for work areas

Pack	Cat.Nos	
		Suitable for meeting rooms, classrooms, open areas, etc. Dual technology
1	0 489 18	**Ceiling mounted** 360° passive infrared and ultrasound detection, range 8 m IP 20 Fits directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep flush-mounting box Cat.No 0 893 58 Surface mounted on ceiling using accessory Cat.Nos 0 488 75 Connection by KNX red/black connector
1	0 489 22	360° passive infrared detection with high density lens, range 8 m IP 20 Fits directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep flush-mounting box Cat.No 0 893 58 Surface mounted on ceiling using accessory Cat.No 0 488 75 Connection by KNX red/black connector
1	CP-EBDSPIR-KNX	360° passive infrared detection, range 7 m Flat and compact sensor for standard heights IP 40 Fits directly in suspended ceiling with springs (supplied)
1	CP-MWS6-KNX	360° MW (microwave) detection, range 16 m Flat and compact sensor IP 40 Fits directly in suspended ceiling with springs (supplied)

Special sensors for corridor

Pack	Cat.Nos	
1	0 489 19	**Ceiling mounted motion sensor** Double passive infrared detection 360°, lateral range 2 x 12 m IP 20 Recommended fixing height: 2.5 m Fits directly in suspended ceiling with springs (supplied) or is installed in a 50 mm deep flush-mounting box Cat.No 0 893 58 Surface mounted on ceiling using accessory Cat.No 0 488 75
1	CP-MWS3A-KNX	**Ceiling mounted presence sensor** MW (microwave) detection, range up to 23 m Flat and compact sensor with adjustable head for special applications IP 40 Recommended fixing height: 2.8 m Fits directly in suspended ceiling with springs (supplied)

Special presence sensor for high bay






Pack	Cat.Nos	
1	CP-EBDHS-KNX	**Ceiling mounted** 360° passive infrared detection, high sensitivity, range 40 m Flat and compact sensor for high heights IP 65 Recommended fixing height: 15 m




Special motion sensor for outdoor car parks and cellars

Pack	Cat.Nos	
1	0 489 21	**Wall or ceiling mounted - surface mounting** Passive infrared detection with 270° adjustable head, range 20 m IP 55 Recommended fixing height: 2.5 m Can be fixed in a corner with a special accessory Cat.No 0 489 72

Sensors

KNX coverage patterns

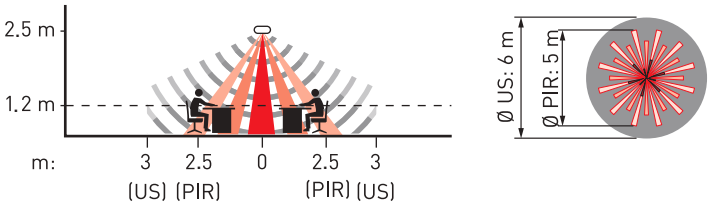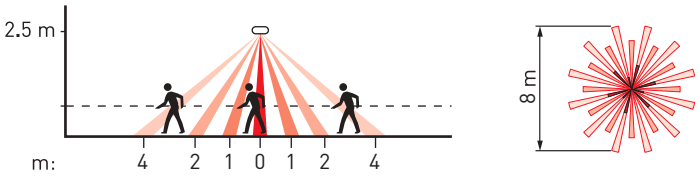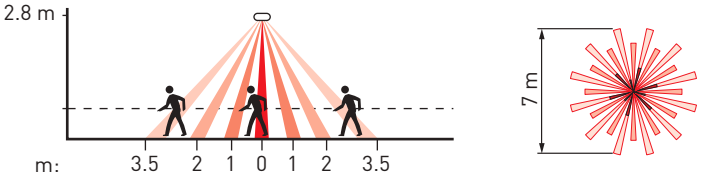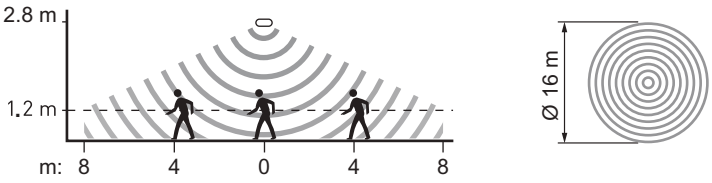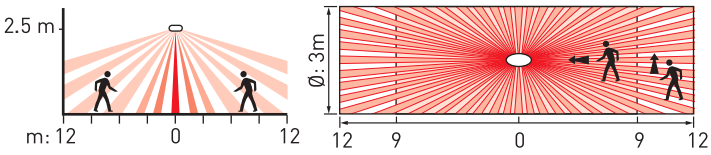Cat. Nos	Installation technology type	Range	Detection area	Examples of applications
0 489 18		6 m (US) 5 m (PIR)		Classroom, meeting room, open plan office
0 489 22		8 m		Individual office, corridor, stairways, restrooms etc.
CP-EBDSPIR-KNX		7 m		Individual office, corridor, stairways, restrooms etc.
CP-MWS6-KNX		16 m		Individual office, corridor, stairways, restrooms etc.
0 489 19		2 x 12 m		Long corridor

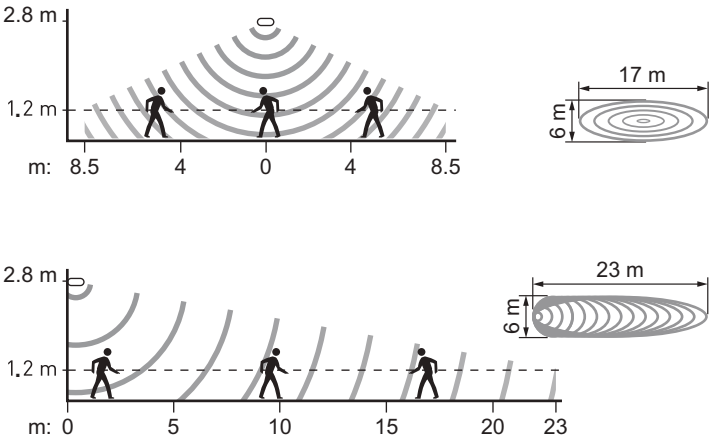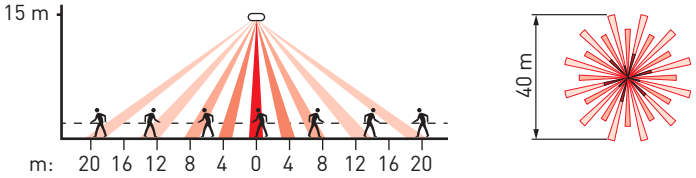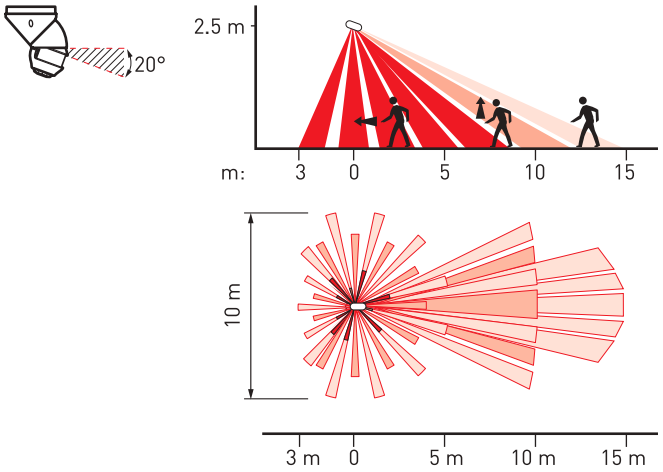Cat. Nos	Installation technology type	Range	Detection area	Examples of applications
CP-MWS3A-KNX		23 m		Long corridor
CP-EBDHS-KNX		40 m		High bay
0 489 21		18 m		High ceiling areas (warehouses, gymnasium) outdoor car park, basement, laboratory

KNX building automation

KNX modular controllers


KNX certified



0 026 65



0 026 73

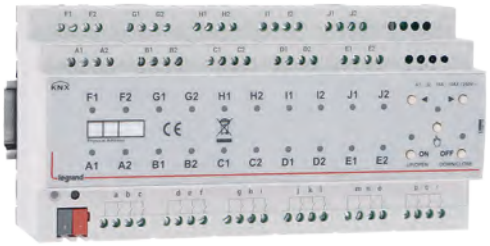

0 026 79

Connected with the KNX cable
Configuration using ETS programming software

Pack	Cat.Nos	Modular controllers for dimming
		Each output can be controlled by a sensor and/or KNX control unit
		For DALI control
1	0 026 65	1 output DALI bus (64 DALI ballasts max) to control up to 16 DALI groups and up to 64 DALI scenes 4 DIN modules
1	0 026 99	1 output DALI bus (64 DALI ballasts max) to control individually up to 64 DALI luminaires and up to 16 DALI scenes 4 DIN modules
		For 1-10V control
1	0 026 68	10 outputs 1-10 V also controlling 10 ON/OFF circuits (16 A max) 10 DIN modules
1	0 026 88	4 outputs 1-10 V also controlling 4 ON/OFF circuits (16 A max) 8 DIN modules
		For LED and all other LV and ELV loads
1	0 026 54	2 outputs 2 x 300 W/VA maximum per output 4 DIN modules

Pack	Cat.Nos	Modular ON/OFF controller
		Each output can be controlled by a sensor and/or KNX control unit
1	0 026 80	4 x 16 A outputs 4 DIN modules



Pack	Cat.Nos	Modular multi-application ON/OFF controllers
		Each output can be controlled by a sensor and/or KNX control unit Multi-application controllers with independent input channels and outputs configurable to control lighting loads, power sockets, roller shutters, and HVAC equipment
1	0 026 72	8 x 16 A outputs 6 DIN modules
1	0 026 73	8 x 16 A outputs - 8 inputs 6 DIN modules
1	0 026 74	12 x 16 A outputs 6 DIN modules
1	0 026 76	16 x 16 A outputs 10 DIN modules
1	0 026 78	20 x 16 A outputs 10 DIN modules
1	0 026 79	20 x 16 A outputs - 18 inputs 10 DIN modules

Pack	Cat.Nos	Room Controller Unit
		Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by KNX controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts) Multiphase connection and consumption measurement
1	0 484 18	8 inputs - 10 outputs 8 DIN modules
1	0 484 22	16 inputs - 16 outputs 12 DIN modules

Controllers

KNX load tables

Load table at 230 V a.c. 50-60Hz

Cat.Nos	Outputs	 Halogen lamp	 ELV halogen lamp with ferromagnetic or electronic transformer	 Fluorescent tube	 LED and compact fluorescent lamp	 Fluorescent lamp with 1-10 V ballast	 DALI	 Motors
Modular controllers for dimming								
0 026 65	**1**	-	-	-	-	-	64 ballasts (group control only)	-
0 026 99	**1**	-	-	-	-	-	64 ballasts (individual control)	-
0 026 68	**10**	-	-	-		4000 VA	-	-
0 026 88	**4**	-	-	-	-	1000 VA	-	-
0 026 54	**2**	2 x 300 W	2 x 200 VA	2 x 300 VA	2 x 75 W	-	-	-
Modular ON/OFF controllers								
0 026 80	**4**	2 x 3680 W	4 x 1000 VA	4 x [10 x (2 x 36 W)]	4 x 500 VA	-	-	4 x 500 VA
0 026 72	**8**	8 x 4000 VA	8 x 1800 VA	8 x 2400 VA	8 x 400 VA	-	-	8 x 1000 VA
0 026 73	**8**	8 x 4000 VA	8 x 1800 VA	8 x 2400 VA	8 x 400 VA	-	-	8 x 1000 VA
0 026 74	**12**	12 x 4000 VA	12 x 1800 VA	12 x 2400 VA	12 x 400 VA	-	-	12 x 1000 VA
0 026 76	**16**	16 x 4000 VA	16 x 1800 VA	16 x 2400 VA	16 x 400 VA	-	-	16 x 1000 VA
0 026 78	**20**	20 x 4000 VA	20 x 1800 VA	20 x 2400 VA	20 x 400 VA	-	-	20 x 1000 VA
0 026 79	**20**	20 x 4000 VA	20 x 1800 VA	20 x 2400 VA	20 x 400 VA	-	-	20 x 1000 VA
Room Controller Units								
0 484 18	**4** **4** **2**	4 x 500 W 4 x 1000 W 2 x 3680 W	4 x 250 VA 4 x 500 VA 2 x 1000 VA	4 x [2 x (2 x 36 W)] 4 x [4 x (2 x 36 W)] 2 x [10 x (2 x 36 W)]	4 x 80 VA 4 x 160 VA 2 x 500 VA	-	1 x 64 ballasts	4 x 250 VA 4 x 500 VA 2 x 500 VA
0 484 22	**4** **8** **4**	4 x 500 W 8 x 1000 W 4 x 3680 W	4 x 250 VA 8 x 500 VA 4 x 1000 VA	4 x [2 x (2 x 36 W)] 8 x [4 x (2 x 36 W)] 4 x [10 x (2 x 36 W)]	4 x 80 VA 8 x 160 VA 4 x 500 VA	-	1 x 64 ballasts	4 x 250 VA 8 x 500 VA 4 x 500 VA

*: Compatible with dimmable LED and compact fluorescent lamps

KNX building automation


KNX infrastructure products

KNX certified


0 026 93


0 026 92


0 029 17


0 035 07

Connected with the KNX cable
Configuration using ETS programming software

Pack	Cat.Nos	KNX interface - voltage contact
		Connects voltage free contacts devices (switches, push-buttons, alarms, etc.) to the KNX
		Modular
1	0 026 93	4 inputs 0 to 265 AC/DC powered 2 DIN modules
		Flush mounting
		For installation in a flush-mounting box
1	0 026 92	4 inputs - 4 outputs

Pack	Cat.Nos	Line coupler
1	0 028 98	Provides galvanic isolation between lines Necessary in an installation where there are more than 64 KNX participants 2 DIN modules

Pack	Cat.Nos	IP/KNX router
1	0 029 17	Can act as main line or backbone coupler Links different KNX networks to each other via the IP infrastructure 2 DIN modules

Pack	Cat.Nos	Modular power supplies
		Powers one KNX line Integrated filter to prevent the short-circuit of BUS messages Voltage 230 V± - 30 V= With additional 30 V unfiltered output 7 DIN modules
1	0 035 06	320 mA
1	0 035 07	640 mA

Pack	Cat.Nos	KNX connector
1	0 488 79	Black and red Supplied in boxes of 50

Pack	Cat.Nos	KNX cables
		Length 500 m 0.8 mm dia. quad Isolation 4000 V
1	0 492 91	1 pair: red/black
1	0 492 92	2 pairs: red/black and yellow/white

Red catalogue numbers: New products

Guest room management system

Welcome your guest with dedicated scenes and provide the intuitive control of lights, curtains, shutters and temperature for a unique experience.
Two possibilities of installation.

BUS

Arteor Advance
Wired products



See p. 166

UX for Upscale Hotel
Range of devices for premium hotels


- Room control unit in addition to essential room functions
- Room controller for each room to control all functions
- With high degree of customization and integration possible



See p. 168

Radio

Arteor Advance
Wireless batteryless products



See p. 171

UXOne
Scalable solution for midscale hotel

- Room controller inside the thermostat
- For midscale hotels, ideal for retrofits
- Accessories and compatibility with wiring devices to control room comfort



See p. 170

Hotel equipment

BUS



AC5222MW



0 675 91



0 675 93



0 674 59

Support frame and plate selection charts **p. 102-110**

Pack	Cat.Nos	Key card switches BUS/SCS
		Equipped with covers To be equipped with support frames (p. 102) and plates (p. 110-117) For energizing a circuit by inserting a key card Time delay of approx. 30 s after card removal Lighting of the slot by LED 2 modules
	Square	**Mechanical keycard switch**
1	AC5221MW	○ Matt White
1	AC5221MB	● Matt Black
		RFID keycard switch Only works with ISO 13.56 MHz badges
1	AC5222MW	○ Matt White
1	AC5222MB	● Matt Black
		Do not disturb - Make up room control indicators
		To be equipped with support frames (p. 102) and plates (p. 110-117)
1	0 675 90	External indicator and bell push-button
1	0 675 91	External indicator and bell push-button + badge reader
		Do not disturb - Make up room mechanism to be equipped
		Mechanism
1	0 675 93	2 modules To be equipped with key covers, support frames (p. 102) and plates (p. 110-117)
	Square	**Couple of cover plates with Do not disturb symbol and Make up room symbol**
2	AC13506MW	○ Matt White
2	AC13506MB	● Matt Black

Pack	Cat.Nos	Display thermostat
1	0 674 59	Flush-mounted thermostat with backlit display To be equipped with support frames and plates (p. 102, 110) Can be used to control the temperature of an individual zone, with or without a temperature central unit Features a temperature probe and an input for the connection of a contact line (e.g. window contact) Can be used for the management of different types of systems, and the adjustment of the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems 2 modules

Red catalogue numbers: New products

Hotel equipment

equipment for reception, guest rooms and infrastructure



BT-348402



BT-MH201



0 484 12

Pack	Cat.Nos	Reception products
10	0 675 89	**Badge - key card** Credit card shaped badge (ISO 50 x 80 mm) Uses transponder technology with frequency 13.56 MHz To be used with programmer Cat.No BT-348402 The badge can be customized
1	BT-348402	**Programmer** Desk device to be connected to the PC (at the reception) to program badges

Pack	Cat.Nos	Room products
1	BT-MH201	**IP scenario module** Manages scenarios related to hotel rooms (With basic time and logic conditions) Works as a gateway for the Configuration software
		BACnet Room Controller Units Power modules equipped with output contacts for controlling: - different types of ON/OFF load (lighting, roller shutters, contactors, motors, etc.) - a DALI dimming output for 64 ballasts max. Loads are managed by the controls to which they are linked: either by BUS SCS controls, or by wired connection input terminals (switches, push-buttons, volt-free contacts)
1	0 484 08	8 inputs - 10 outputs 8 DIN modules 17.5 mm
1	0 484 12	16 inputs - 16 outputs 12 DIN modules 17.5 mm

Pack	Cat.Nos	Infrastructure products
		To be associated with Cat.No BT-MH201
		Softwares Software for the room status monitoring, the corresponding basic management and badge programming
1	BT-3544SW	For hotels with up to 20 guest rooms
1	BT-3546SW	For hotels over 20 guest rooms

Arteor Advanced mechanism
compatible with the INCARA range.

Hotel equipment - user interfaces

UX for Upscale Hotel



0 487 77



0 487 74



0 487 72




0 487 73

Touch devices for an intuitive and easy use of different room functions
These devices are compatible with room controllers IP/Bacnet Cat.No 0 484 08/12 or IP scenario module Cat.No BT-MH201
Possibility to customize touch control using configurator on Legrand website: icon, colour, hotel logo, mounting support, etc
Connection to a 27 V BUS power

Scenario controllers


To be equipped with support frame Cat.No 0 487 79 (p. 169)

Pack	Cat.Nos	
1	0 487 77	**2-scene and Do not disturb – Make up room activation** 4 gang touch plate Wake up/Sleep, Do not disturb – Make up room  ● Black
1	0 487 74	**6-scene activation** 6 gang touch plate Wake up/Sleep, TV, Master OFF, Open/close curtains  ● Black

BUS/SCS bedside panel

Pack	Cat.Nos	
1	0 487 72	Temperature control, Do not disturb activation and 5 scenes controls (Master OFF, Wake up/Sleep, TV, reading) To be equipped with support frame Cat.No 0 487 79 (p. 169)  ● Black

Display thermostat

Pack	Cat.Nos	
1	0 487 73	 ● Black Features a temperature and humidity probe and an input for connecting a contact line (i.e. window contact) Can be used to manage different types of systems, and to adjust the fan speed when fan coils are used Possibility of automatic operation (summer/winter), with compatible systems To be equipped with support frame Cat.No 0 487 79 (p. 169)

Product customisation possible using software available on https://uxforhotels.legrand.com/



Hotel equipment - user interfaces

UX for Upscale Hotel (continued)



0 487 76



0 487 70

Pack	Cat.Nos	Control indicators for room management
		To be equipped with support frame Cat.No 0 487 79
1	0 487 75	**Do not disturb – Make up room external indicator and bell push-button** ● Black
1	0 487 76	**Do not disturb – Make up room external indicator and bell push-button + badge reader** ● Black

Pack	Cat.Nos	Movement detector
1	0 487 78	PIR sensor for virtual key-card function To be installed in false ceiling Ø20 mm Detects guest presence and activates room functions

Pack	Cat.Nos	Keycard switches BUS/SCS
		Do not disturb – Make up room activation 2 modules To be equipped with support frame Cat.No 0 487 79
1	0 487 70	**Keycard reader with badge discrimination (guest or staff)** ● Black Enables launching of different actions depending on whether guests or staff are coming in
1	0 487 71	**Keycard holder** Only works with ISO 13.56 MHz badges ● Black

Pack	Cat.Nos	Accessories
1	0 487 79	**Support frame** For flush-mounting in 2 and 3 modules flush-mounting boxes
5	0 487 90	**Flat mounting accessory** For extra-slim flush-mounting installation (i.e. furniture) Replace use of support frame Cat.No 0 487 79
5	0 489 91	Frame for flat mounting accessory ● Black
5	0 489 92	Frame for flat mounting accessory ○ White
5	0 489 84	Frame for flat mounting accessory Custom

Hotel room management


UXOne touch controls, actuators and accessories



0 489 00



0 489 15

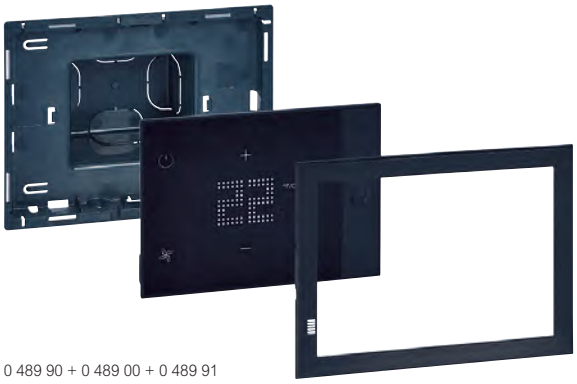

0 489 90 + 0 489 00 + 0 489 91




0 489 10

UXOne connected thermostat with room occupancy sensor to optimise energy management, can be used for both heating and/or cooling
It allows to choose and display the setpoint temperature, ventilation speed and switch to thermal protection mode
The screen displays the measured ambient temperature or the setpoint temperature
Possibility to add up to three wired devices to the thermostat, such as motion sensor Cat.No 0 487 78 for virtual keycard
It has one relay output to drive a power contactor
Compatible with BACnet protocol for connection with a BMS (building management system)
UXOne thermostat parameters and peripherals are configured through Hotel + Project software
Up to three additional functions: "Do Not Disturb"/"Make Up Room"/"Scenarios"
Possibility to customize touch control using configurator on Legrand website: icon, hotel logo, mounting support, etc
Wall-mounted at a height of approximately 150 cm above floor level, unless otherwise specified by standards in force

Flush-mounted thermostats 230 V

Supplied complete with flush-mounting frame
For flat mounting installation, use support Cat.No 0 489 90 and frames Cat.No 0 489 91, 0 489 92 or 0 489 84




● Black
○ White

Pack	Cat.Nos	
	Standard	"Do not disturb"/ "Make up room"
1	0 489 00	0 489 15
1	0 489 02	0 489 24

Flush-mounted thermostats 24 V


Supplied complete with flush-mounting frame
For flat mounting installation, use support Cat.No 0 489 90 and frames Cat.No 0 489 91, 0 489 92 or 0 489 84




● Black
○ White

Pack	Cat.Nos	
	Standard	"Do not disturb"/ "Make up room"
1	0 489 04	0 489 27
1	0 489 06	0 489 29

Accessories




Flat mounting accessory for fully recessed solution



Frames for flat mounting
● Black
○ White
Custom

Pack	Cat.Nos
5	0 489 90
5	0 489 91
5	0 489 92
5	0 489 84


Surface-mounted thermostats 230 V



● Black
○ White

Pack	Cat.Nos	
	Standard	"Do not disturb"/ "Make up room"
1	0 489 01	0 489 23
1	0 489 03	0 489 25


Surface-mounted thermostats 24 V



● Black
○ White

Pack	Cat.Nos	
	Standard	"Do not disturb"/ "Make up room"
1	0 489 05	0 489 28
1	0 489 07	0 489 30


HVAC actuator



Power supply 110/240 VAC
For combined use with UXOne thermostats to control heating/ cooling/ventilation
Can control different load types depending on requirements

Pack	Cat.Nos
1	0 489 10

DIN rail mounted ON/OFF actuator



Radio technology including the Proxy and Sink functions, on the ISM 2.4 GHz band (2400/2483.5 MHz), with 16 channels (11 to 26) Max.
RF power < 20 dBm/100 mW
Range: 150 m in unobstructed space, point to point

Pack	Cat.Nos
1	0 038 02

Other configurations available on request
Contact your regional department

Installation and user guide for hotel rooms
UXOne solutions

Hotel room management

Smart wireless batteryless accessories for UXOne rooms


AA5707MW


AA5208MW


AA5705MB



AA5706MW


To complete your installation with UXOne, add also Arteor Advance with Netatmo room devices (for lighting and shutter control) and scenario controls
Supplied with repositionable adhesive pads for fixing the switch to any support, can also be installed in a multi-gang configuration
Extra-slim standalone switches
Products available from a connected Dealer

Smart wireless batteryless Home/Away switch

Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to the installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Home/Away scenes can be customised through the Hotel + Project app

1-gang
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with 2-module plates (p. 132-141)

Pack	Square	Slender
1	AC5707MW	AA5707MW
1	AC5707MB	AA5707MB
1	AC5707MT	AA5707MT

Square

Slender




○ Matt White
● Matt Black
○ Matt Titanium

Smart wireless batteryless Master ON/OFF switch

Extra-slim, maintenance-free device without any battery
Used to add 2 extra scenes to the installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Preset ON/OFF scenes which can be customised through the Hotel + Project app

1-gang
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with 2-module plates (p. 132-141)

Pack	Square	Slender
1	AC5208MW	AA5208MW
1	AC5208MB	AA5208MB
1	AC5208MT	AA5208MT

Square

Slender




○ Matt White
● Matt Black
○ Matt Titanium

Smart wireless batteryless scenes switches

Extra-slim, maintenance-free device without any battery
Used to add customised scenes to the installation
Energy harvesting mechanism that generates by itself the energy required for the switching process
Qualified for 1 million cycles
Smooth and silent switching
Scenes can be customised through the Hotel + Project app
Supplied with cover plate, multi-standard support frame (with removable fins) and removable stickers for fixing the control unit on any substrate
To be equipped with 2-module plates (p. 132-141)

4 scenes - 2-gang



Pack	Square	Slender
1	AC5705MW	AA5705MW
1	AC5705MB	AA5705MB
1	AC5705MT	AA5705MT

Square

Slender


○ Matt White
● Matt Black
○ Matt Titanium

Wake Up/Sleep - 1-gang


Pack		
1	AC5708MW	AA5708MW
1	AC5708MB	AA5708MB
1	AC5708MT	AA5708MT

○ Matt White
● Matt Black
○ Matt Titanium

4 scenes Day/Night/Reading/TV - 2-gang

Pack		
1	AC5706MW	AA5706MW
1	AC5706MB	AA5706MB
1	AC5706MT	AA5706MT




○ Matt White
● Matt Black
○ Matt Titanium

Red catalogue numbers: New products

Hotel room management

UXOne radio controls



0 884 20

Products compatible with UXOne thermostats

Pack	Cat.Nos	
1	0 884 20	**Badge reader micromodule** For connecting a conventional keycard reader to a Radio installation and Green Power technologies combined, including the Proxy and Sink functions, on the ISM 2.4 GHz band (2400/2483.5 MHz), with 16 channels (11 to 26) Max. RF power < 20 dBm/100 mW Range: 150 m in unobstructed space, point to point
	Square / Slender	**"Do Not Disturb"/"Make Up Room" switch** Radio technology, including the Proxy and Sink functions, on the ISM 2.4 GHz band (2400/2483.5 MHz), with 16 channels (11 to 26) Max. RF power < 20 dBm/100 mW Range: 150 m range in unobstructed space, point to point Supplied with cover plates, to be equipped with support frames (p. 131) and plates (p. 132-141)
1	AC27109MW / AA27109MW	○ Matt White
1	AC27109MB / AA27109MB	● Matt Black
1	AC27109MT / AA27109MT	◌ Matt Titanium

Hotel room management

UXOne room monitoring



0 489 09

Pack	Cat.Nos	**Hotel server**
1	0 489 09	For centralising all UXOne thermostat data to be fed to a room monitoring interface for hotel reception Also used to control rooms remotely from hotel reception (scenarios, temperature)

Red catalogue numbers: New products

Notes

Notes





United Arab Emirates
Main Representative Office
Legrand Gulf Countries
Wing-C, Office 701
Dubai Silicon Oasis Authority
P.O. Box 341068
Dubai, United Arab Emirates
Tel: (+971) 4 3821 821

Legrand Service Center
GemNet Gulf L.L.C.
(A group company of Legrand)
Street No. 26, Al Quoz
Industrial Area 4,
P.O. Box 52914,
Dubai, United Arab Emirates
Tel: (+971) 4 341 9920
Fax: (+971) 4 341 9940

Kuwait
Shuwaikh
P.O. Box 177
Safat 13002, Kuwait
Tel: (+965) 9726 2699
Fax: (+965) 2482 4754

Oman
Tel: (+968) 92245108

Qatar
Global Business Center,
Al Hitmi Village Building no. 8,
4th Floor, Office no. R2
Corniche Road,
Doha, Qatar
Tel: (+974) 4 402 30 18
Fax: (+974) 4 436 66 73

FOLLOW US ON

legrand.ae
youtube.com/@legrandaegulfcountries
linkedin.com/company/legrand-gulf-countries
facebook.com/legrandgulfcountries
instagram.com/legrandgulfcountries

World Headquarters
and International Department
Limoges Cedex - France 87045
87 87 06 55 5 (0) 33 + : ☎
55 74 06 55 5 (0) 33 + :Fax

EXB24045-July 2025-© Legrand